JOINT ADVISORY CIRCULAR
AC 25.1329 - 1X

APPROVAL OF FLIGHT GUIDANCE SYSTEMS

DRAFT
July, 2004

TABLE OF CONTENTS

1 PURPOSE 1

2 APPLICABILITY 1

3 CANCELLATION/EFFECTIVE DATE 1

4 RELATED SECTIONS OF PART 25.000 2

5 GUIDANCE AND ADVISORY MATERIAL REFERENCED IN THIS AC 3

6 RELATED INDUSTRY STANDARDS 4

7 BACKGROUND 5

8 OVERVIEW OF FGS
- A. Purpose 6
- B. FGS Components 6
- C. FGS Functions 7

9 COMPLIANCE WITH § 25.1329 8

10 FGS ENGAGEMENT, DISENGAGEMENT, INDICATIONS, AND OVERRIDE
- A. Autopilot 12
- B. Flight Director 17
- C. Autothrust 20
- D. Override of the FGS 22
- E. FGS Engagement Mode Compatibility 24

11 CONTROLS, INDICATIONS, AND ALERTS
- A. General 25
- B. FGS Controls 26
- C. FGS Mode Selection, Annunciation, and Indication 27
- D. FGS Alerting, Warning, Caution, Advisory, and Status 30
- E. Head-up Displays (HUD) 34

12 PERFORMANCE OF FUNCTION
A. General Considerations 40
B. Normal Performance 41
C. Performance in Rare Normal Conditions 45
D. Icing Considerations in Normal and Rare Normal Conditions 48
E. Performance in Non-normal Conditions 49
F. Speed Protection 51

13 CHARACTERISTICS OF SPECIFIC MODES
A. General 57
B. Lateral Modes 57
C. Vertical Modes 59
D. Multi-axis Modes 64

14 FGS INTEGRATION
A. General 71
B. System Integration Issues 71
C. Functional Interfaces 73

15 SAFETY ASSESSMENT
A. General 74
B. FGS Failure Conditions 75
C. Type and Severity of Failure Conditions 77
D. Mitigation of Failure Conditions 79
E. Validation of Failure Conditions 80
F. Specific Considerations 81
G. Failure to Disengage the FGS 86

16. COMPLIANCE DEMONSTRATION USING FLIGHT TEST AND SIMULATION
A. General 87
B. Performance Demonstration (Fault Free): § 25.1301 90
C. Failure Conditions Requiring Validation: § 25.1309 101
D. Criteria Supporting Operational Use of Autopilot 108
E. Automatic Disengagement of Autopilot 113
F. Assessment of Human Factors 114

17. AIRPLANE FLIGHT MANUAL
A. General 117
B. Information Supporting Operational Use of Autopilot 117
C. Limitations 118
D. Non-normal/Emergency Procedures 118
E. Normal Procedures 118

APPENDICES

A. Definitions 120
B. Acronyms 125
C. Safety Assessment 128
D. Flight Test Procedures 132

FIGURES

D 1. Deviation Profile Method 143
D 2. Height Loss Method 144

1. PURPOSE

This Advisory Circular (AC) describes acceptable means for showing compliance with the requirements of 14 CFR 25.1329. These means are intended to provide guidance to supplement the engineering and operational judgment that forms the basis of any compliance demonstration.

2. APPLICABILITY

The guidance provided in this document is directed to airplane manufacturers, modifiers, foreign regulatory authorities, and Federal Aviation Administration (FAA) transport airplane type certification engineers and their designees.

This material is neither mandatory nor regulatory in nature and does not constitute a regulation. It describes acceptable means, but not the only means, for demonstrating compliance with the applicable regulations. The FAA will consider other methods of demonstrating compliance that an applicant may elect to present. While these guidelines are not mandatory, they are derived from extensive FAA and industry experience in determining compliance with the relevant regulations. On the other hand, if we become aware of circumstances that convince us that following this AC would not result in compliance with the applicable regulations, we will not be bound by the terms of this AC, and we may require additional substantiation or design changes as a basis for finding compliance.

This material does not change, create any additional, authorize changes in, or permit deviations from regulatory requirements.

3. CANCELLATION/ EFFECTIVE DATE

Advisory Circular (AC) 25.1329-1A, dated July 8, 1968 is hereby canceled.

4. RELATED SECTIONS OF PART 25

§ 25.301	Structure (Subpart C – Structure; General)
§ 25.671	Control systems, General
§ 25.672	Stability augmentation and automatic and power-operated systems
§ 25.677	Trim systems
§ 25.777	Cockpit controls
§ 25.779	Motion and effect of cockpit controls
§ 25.781	Cockpit control knob shape
§ 25.901	Installation (Subpart E – Powerplant; General)
§ 25.903	Engines (Subpart E – Powerplant; General)
§ 25.1301	Function and installation
§ 25.1309	Equipment, systems, and installations
§ 25.1322	Warning, caution, and advisory lights

5. GUIDANCE AND ADVISORY MATERIAL REFERENCED IN THIS AC

AC 20-115B	Radio Technical Commission for Aeronautics Document RTCA/DO 178B
AC 20-129	Airworthiness Approval of Vertical Navigation (VNAV) Systems for use in the U.S. National Airspace System (NAS) and Alaska
AC 25-7A	Flight Test Guide for Certification of Transport Category Airplanes
AC 25-11	Transport Airplane Electronic Display Systems
AC 25-12	Airworthiness Criteria for the Approval of Airborne Windshear Warning Systems in Transport Category Airplanes
AC 25.672-1	Active Flight Controls
AC 25.1309-1A	System Design and Analysis
AC 25.1581-1	Airplane Flight Manual
AC 120-28D	Criteria for Approval of Category III Weather Minima for Takeoff, Landing, and Rollout
AC 120-29A	Criteria for Approving Category 1 and Category II Landing Minima for FAR 121 Operators
AC 120-41	Criteria for Operational Approval of Airborne Windshear Alerting and Flight Guidance Systems

6. RELATED INDUSTRY STANDARDS

SAE ARP5366	Autopilot, Flight Director and Autothrust Systems
SAE ARP4754	Certification Considerations for Highly Integrated or Complex Aircraft Systems
SAE ARP4100	Flight Deck and Handling Qualities Standards for Transport Aircraft
SAE ARP4761	Guidelines and Methods for Conducting the Safety Assessment Process on Civil Airborne Systems and Equipment
SAE ARP5288	Transport Category Airplane Head Up Display Systems
RTCA DO-178B/ EUROCAE ED-12B	Software Considerations in Airborne Systems and Equipment
RTCA DO-160D/ EUROCAE ED–14D	Environmental Conditions and Test Procedures for Airborne Equipment
RTCA DO-254/ EUROCAE ED-80	Design Assurance Guidance for Airborne Electronic Hardware
DOT/FAA/CT–96/1	Human Factors Design Guide for Acquisition of Commercial-Off-the-Shelf Subsystems, Non-Developmental Items, and Developmental Systems

7. BACKGROUND

This advisory material replaces material previously provided in AC 25.1329 for autopilots. The automatic control and guidance systems in current aircraft have evolved to a level that dictates a revision to current advisory material.

There have been dramatic changes in technology and system design, which have resulted in much higher levels of integration, automation, and complexity. These changes have also redefined the allocation of functions and interfaces between systems. Relatively simple, dedicated systems have been replaced with digital multi–function systems with more modes and automatic changes in modes of operation. The introduction of fly–by–wire flight control systems has created new interface considerations for the flight guidance system (FGS).

These new systems are capable of providing better performance, increased safety, and decreased workload. But, if designed without consideration for the criteria in this AC, these systems could also be confusing and not immediately intuitive for the flightcrew. Significant operational experience has been gained on new generation systems, and this guidance material is provided based on that experience.

This advisory material is provided for Flight Guidance Systems, which include any autopilot functions, flight director functions, and automatic thrust control functions as well as any interactions with stability augmentation and trim functions.

8. OVERVIEW OF FGS

A. Purpose

The Flight Guidance System (FGS) is primarily intended to assist the flightcrew in the basic control and tactical guidance of the airplane. The system may also provide workload relief to the pilots and provide a means to fly a flight path more accurately to support specific operational requirements, such as reduced vertical separation margin (RVSM) or reduced navigation performance (RNP).

B. FGS Components

For the purpose of this AC, the term "FGS" includes all the equipment necessary to accomplish the FGS function, including the sensors, computers, power supplies, servo–motors/ actuators, and associated wiring. It includes any indications and controllers necessary for the pilot to manage and supervise the system.

Any part of the FGS that remains mechanically connected to the primary flight controls or propulsion controls when the Flight Guidance System is not in use is regarded as a part of the primary flight controls and propulsion system, and the provisions for such systems are applicable.

8. OVERVIEW OF FGS
C. FGS Functions

1. ELEMENTS OF FGS

a. Flight Guidance and Control (e.g., autopilot, flight director displayed head–down or head–up)

b. Autothrottle/ Autothrust Systems. The term "autothrust" is generic in nature and includes power control systems for propeller driven airplanes.

c. Interactions with Stability Augmentation and Trim Systems

d. Alerting, Status, Mode annunciation, and Situation Information Associated with Flight Guidance and Control Functions

2. APPROACH AND LANDING SYSTEM. The FGS includes those functions necessary to provide guidance and control in conjunction with an approach and landing system, such as the following:

(a) Instrument Landing System (ILS)

(b) Microwave Landing System (MLS)

(c) Global Navigation Satellite System (GNSS) Landing System (GLS).

3. FLIGHT MANAGEMENT SYSTEM. The FGS also includes those functions necessary to provide guidance and control in conjunction with a Flight Management System (FMS). The FGS does not include the flight planning and the generation of flight path and speed profiles tied to waypoints and other flight planning aspects of the Flight Management System (FMS). However, it does include the interface between the FMS and FGS necessary for the execution of flight path and speed commands.

4. DESIGN PHILOSOPHY. The applicant should establish, document and follow a design philosophy that supports the intended operational use regarding FGS behavior, modes of operation, the pilot interface with controls, indications, alerts, and mode functionality.

5. DESCRIPTION OF FGS BEHAVIOR AND OPERATION. A description of the FGS behavior and operation should be addressed from flightcrew and maintenance perspectives in appropriate documentation and training material.

9. COMPLIANCE WITH § 25.1329

Subsequent sections of this advisory material provide acceptable means of compliance with § 25.1329 and the applicability of other Part 25 rules to FGS (e.g., § 25.1301 and § 25.1309). The demonstrated means of compliance may include a combination of analysis, laboratory testing, flight testing, and simulator testing. The applicant should coordinate with the authorities early in the certification program via a certification plan to reach agreement on the methods to be used to demonstrate compliance.

The following table lists the relevant paragraphs of § 25.1329 and indicates where acceptable means of compliance with each paragraph may be found within this AC.

Section / Paragraph	Acceptable Means of Compliance
§ 25.1329 (a) Quick disengagement controls for the autopilot and autothrust functions must be provided for each pilot. The autopilot quick disengagement controls must be located on both control wheels (or equivalent). The autothrust quick disengagement controls must be located on the thrust control levers. Quick disengagement controls must be readily accessible to each pilot while operating the control wheel (or equivalent) and thrust control levers.	**Chapter 10** FGS Engagement, Disengagement, Indications, and Override **Part A**. Autopilot, and **Part C.** Autothrust
§ 25.1329 (b) The effects of a failure of the system to disengage the autopilot or autothrust functions when manually commanded by the pilot must be assessed in accordance with the requirements of § 25.1309.	**Chapter 10** FGS Engagement, Disengagement, Indications, and Override **Part A**. Autopilot, **Part C**. Autothrust, and **Part D**. Override of the FGS **Chapter 15** Safety Assessment **Part G**. Failure to Disengage the FGS

§ 25.1329 (c) Engagement or switching of the flight guidance system, a mode, or a sensor must not cause a transient response of the airplane's flight path any greater than a minor transient. For purposes of this section, a minor transient is an abrupt change in the flight path of the airplane that would not significantly reduce airplane safety, and which involves flightcrew actions that are well within their capabilities, involving a slight increase in flightcrew workload or some physical discomfort to passengers or cabin crew.	**Chapter 10** FGS Engagement, Disengagement, Indications, and Override **Chapter 15** Safety Assessment
§ 25.1329(d) Under normal conditions, the disengagement of any automatic control function of a flight guidance system must not cause a transient response of the airplane's flight path any greater than a minor transient.	**Chapter 10** FGS Engagement, Disengagement, Indications, and Override **Chapter 15** Safety Assessment
§ 25.1329 (e) Under rare normal and non-normal conditions, disengagement of any automatic control function of a flight guidance system must not result in a transient any greater than a significant transient. Significant transients may lead to a significant reduction in safety margins, an increase in flightcrew workload, discomfort to the flightcrew, or physical distress to the passengers or cabin crew, including non-fatal injuries. Significant transients do not require, in order to remain within or recover to the normal flight envelope, any of the following: (1) Exceptional piloting skill, alertness, or strength. (2) Forces applied by the pilot which are greater than those specified in § 25.143(c). (3) Accelerations or attitudes in the airplane that might result in further hazard to secured or non-secured occupants.	**Chapter 10** FGS Engagement, Disengagement, Indications, and Override **Chapter 11** Controls, Indications, and Alerts **Part D** FGS Alerting **Chapter 15** Safety Assessment
§ 25.1329 (f) The function and direction of motion of each command reference control, such as heading select or vertical speed, must be plainly indicated on, or adjacent to, each control if necessary to prevent inappropriate use or confusion.	**Chapter 11** Controls, Indications and Alerts

§ 25.1329 (g) Under any condition of flight appropriate to its use, the flight guidance system must not produce hazardous loads on the airplane, nor create hazardous deviations in the flight path. This applies to both fault-free operation and in the event of a malfunction, and assumes that the pilot begins corrective action within a reasonable period of time.	**Chapter 11** Controls, Indications, and Alerts **Part D** FGS Alerting **Chapter 12** Performance of Function **Chapter 15** Safety Assessment **Chapter 16** Compliance Demonstration using Flight Test and Simulation
§ 25.1329 (h) When the flight guidance system is in use, a means must be provided to avoid excursions beyond an acceptable margin from the speed range of the normal flight envelope. If the aircraft experiences an excursion outside this range, the flight guidance system must not provide guidance or control to an unsafe speed.	**Chapter 12** Performance of Function **Part E**. Speed Protection
§ 25.1329 (i) The flight guidance system functions, controls, indications, and alerts must be designed to minimize flightcrew errors and confusion concerning the behavior and operation of the FGS. Means must be provided to indicate the current mode of operation, including any armed modes, transitions, and reversions. Selector switch position is not an acceptable means of indication. The controls and indications must be grouped and presented in a logical and consistent manner. The indications must be visible to each pilot under all expected lighting conditions.	**Chapter 11** Controls, Indications, and Alerts
§ 25.1329 (j) Following disengagement of the autopilot, a warning (visual and auditory) must be provided to each pilot and be timely and distinct from all other cockpit warnings.	**Chapter 10** FGS Engagement, Disengagement, Indications, and Override **Part A.** Autopilot, Section 2.b. **Chapter 15** Safety Assessment

§ 25.1329 (k) Following disengagement of the autothrust function, a caution must be provided to each pilot.	**Chapter 10** FGS Engagement, Disengagement, Indications, and Override **Part C**. Autothrust, Section 2. **Chapter 15** Safety Assessment
§ 25.1329 (l) The autopilot must not create a potential hazard when the flightcrew applies an override force to the flight controls.	**Chapter 10** FGS Engagement, Disengagement, Indications, and Override **Part D.** Override of the FGS, Section 2 **Chapter 11** Controls, Indications, and Alerts **Part D.** FGS Alerting **Chapter 15** Safety Assessment
§ 25.1329 (m) During autothrust operation, it must be possible for the flightcrew to move the thrust levers without requiring excessive force. The autothrust must not create a potential hazard when the flightcrew applies an override force to the thrust levers.	**Chapter 10** FGS Engagement, Disengagement, Indications, and Override **Part D.** Override of the FGS, Section 2 **Chapter 15** Safety Assessment

10. FGS ENGAGEMENT, DISENGAGEMENT, INDICATIONS, AND OVERRIDE

A. Autopilot

Autopilot engagement and disengagement should be accomplished in a manner consistent with other flightcrew procedures and tasks and should not require undue attention.

1. AUTOPILOT ENGAGEMENT

a. Single Switch Action. Each pilot should be able to select the autopilot function of the flight guidance system with a single switch action. The single switch action should engage pitch and roll axes. The autopilot system should provide positive indication to the flightcrew that the system has been engaged. The selector switch position is not acceptable as a means of indication [See § 25.1329(i)].

NOTE: If an operational need is identified for split–axis engagement, then annunciation or indication should be provided for each axis.

b. Multiple Autopilots. For airplanes with more than one autopilot installed, each autopilot may be individually selected and should be so annunciated. It should not be possible for multiple autopilots to be engaged in different modes. For modes that use multiple autopilots, the additional autopilots may engage automatically at selection of the mode or after arming the mode. A means should be provided to determine that adequate autopilot capability exists to support the intended operation (e.g., "Land 2" and "Land 3" are used in some aircraft).

c. Acceptable Transients. The engagement of the autopilot should be free of perceptible transients. Under dynamic conditions, including maneuvering flight, minor transients are acceptable.

d. Flight Director Not Engaged. Without a flight director engaged, the initial lateral and vertical modes should be consistent with minimal disturbance from the flight path. For example, the lateral mode at engagement may roll the airplane to wings level and then hold the airplane heading/ track or maintain the existing bank angle (if in a normal range). A heading/ track pre–select at engagement function may be provided, if precautions are taken to ensure that selection reflects the current intent of

the flightcrew. The modes at engagement should be annunciated and any associated selected target values should be displayed.

e. Flight Director Engaged. With a flight director engaged, the autopilot should engage into a mode consistent with (i.e., the same as—or if that is not possible—then compatible with) the active flight director mode of operation. Consideration should be given to the mode into which the autopilot will engage when large commands are present on either or both flight directors. For example, consideration should be given to whether to retain the active flight director mode or to engage the autopilot into the basic mode as well as the implications for current flight path references and targets. The potential for flightcrew confusion and unintended changes in flight path or modes should be considered.

f. Engagement Status of Autopilot. Regardless of the method used, the engagement status (and changes in status) of the autopilot(s) should be clearly indicated and should not require undue attention or recall.

g. Engagement outside Normal Flight Envelope. The design should consider the possibility that the pilot may attempt to engage the autopilot outside of the normal flight envelope. It is not required that the autopilot should compensate for unusual attitudes or other situations outside the normal flight envelope, unless that is part of the autopilot's intended function.

2. AUTOPILOT DISENGAGEMENT

a. General

(1) Normal Conditions. Under normal conditions, automatic or manual disengagement of the autopilot should be free of significant transients or out–of–trim forces that are not consistent with the maneuvers being conducted by the airplane at the time of disengagement. At most, per § 25.1329(d), a disengagement in normal conditions may not result in a transient any greater than a minor transient. If multiple autopilots are engaged, any disengagement of an individual autopilot should be free of significant transients (i.e., no greater than a minor transient) and should not adversely affect the operation of the remaining engaged autopilot(s).

(2) Other Than Normal Conditions. Under other than normal conditions (i.e., non-normal and rare normal conditions), per § 25.1329(e) disengagement of the autopilot may result in a significant transient. The flightcrew should be able to respond to a significant transient without using any of the following:

(a) Exceptional piloting skill, alertness, or strength,

(b) Forces greater than those given in § 25.143(c), or

(c) Accelerations or attitudes in the airplane that might result in a hazard to secured or non–secured occupants.

(3) Potential for Significant Transient. The flightcrew should be made aware (via a suitable alerting or other indication) of conditions or situations (e.g., continued out–of–trim) that could result in a significant transient at disengagement. [See 11. D. 4 on Awareness of Potential Significant Transient Condition ("Bark before Bite").]

Note: See Appendix A for definitions of Significant Transient and Minor Transient. See Section 12, Part B for a discussion of Normal Conditions, Rare Normal Conditions, and Non-Normal Conditions.

b. Autopilot Disengagement Alerts

(1) Alert Type. Since it is necessary for a pilot to immediately assume manual control following disengagement of the autopilot (whether manual or automatic), a Warning (visual and aural) should be given.

(2) Alert Length. This Warning should be given without delay, and should be distinct from all other cockpit Warnings. It should sound long enough to ensure that it is heard and recognized by the pilot and other flightcrew members, but not so long that it adversely affects communication between crew members or is a distraction. The Warning should continue until silenced by one of the pilots using one of the following means:

(a) An autopilot quick disengagement control,

(b) Re–engagement of the autopilot, or

(c) Another acceptable means.

(3) Multiple Autopilot System.

(a) Disengagement of an autopilot channel within a multiple-channel autopilot system, downgraded system capability, or a reduction in the level of system redundancy which requires immediate flightcrew awareness and possible timely action should cause a Caution level alert to be issued to the flightcrew.

(b) Disengagement of an autopilot channel within a multiple-channel autopilot system which requires only flightcrew awareness should cause a suitable advisory to be issued to the flightcrew.

c. Quick Disengagement Control

(1) Purpose. The purpose is to ensure the capability for each pilot to manually disengage the autopilot quickly with a minimum of pilot hand/ limb movement. The "Quick Disengagement Control" should be located on each control wheel or equivalent within easy reach of one or more fingers/ thumb of the pilot's hand when the hand is in a position for normal use on the control wheel or equivalent.

(2) Criteria. The Quick Disengagement Control should meet the criteria below:

(a) Accessible and operable from a normal hands–on position without requiring a shift in hand position or grip on the control wheel or equivalent,

(b) Operable with one hand on the control wheel or equivalent and the other hand on the thrust levers,

NOTE: When establishing location of the quick disengagement control, consideration should be given to its accessibility with large displacements of or forces on the control wheel (or equivalent) and the possible need to operate the quick disengagement control with the other hand.

(c) Easily located by the pilot without having to first locate the control visually,

(d) Designed so that any action to operate the "Quick Disengagement Control" should not cause an unintended input to the control wheel or equivalent,

(e) Designed to minimize inadvertent operation and interference from other nearby control wheel (or equivalent) switches/ devices, such as radio control or trim.

d. Alternative Means of Autopilot Disengagement

(1) Factors to Consider. When a § 25.1309 assessment shows a need for an alternative means of disengagement, the following factors should be addressed:

(a) Independence from primary Quick Disengagement Control.

(b) Whether alternate means are readily accessible to each pilot.

(c) Latent failure or reliability of those alternate means.

(2) Acceptable Means. The following means of providing an alternative disengagement have been found to be acceptable:

(a) Selecting the engagement control to the "off" position.

(b) Disengaging the bar on mode selector panel.

(c) Activating the trim switch on the yoke.

NOTE: Use of circuit breakers as a means of disengagement is not considered to be acceptable.

e. Flightcrew Pitch Trim Input. If the autopilot is engaged and the pilot applies manual pitch trim input, either the autopilot should disengage with no more than a minor transient or pitch trim changes should be inhibited.

10. FGS ENGAGEMENT, DISENGAGEMENT, INDICATIONS, AND OVERRIDE

B. Flight Director (FD)

Engagement and disengagement of the flight director should be accomplished consistent with other flightcrew procedures and tasks and should not require undue attention.

1. FLIGHT DIRECTOR ENGAGEMENT

a. General

(1) Selection. A means may be provided for each pilot to select (i.e., turn on) and de-select the flight director for display on his or her primary flight display (e.g., attitude display). The selection status of the flight director and the source of flight director guidance should be clear and unambiguous. Failure of a selected flight director should be clearly annunciated.

(2) Engagement. A flight director is considered "engaged" if it is selected and displaying guidance cues.

> NOTE: The distinction is made between "engaged" and "selected," because the flight director might be selected but not displaying guidance cue(s), (e.g., the cue(s) are biased out of view).

(3) Multiple FDs. If there are multiple flight directors and if necessary for crew awareness, indications should be provided to denote which flight director is engaged (e.g., FD1, FD2, HUD). For airplanes with multiple flight directors installed, both flight directors should always be in the same armed and active FGS modes. The selection status of each flight director should be clear and unambiguous for each pilot. In addition, indications should be provided to denote loss of flight director independence, (e.g., first officer selection of captain's flight director).

(4) Autopilot Engaged. A flight director should engage into the current modes and targets of an already engaged autopilot or flight director, if any. With no autopilot engaged, the basic modes at engagement of the flight director functions should be established consistent with typical flight operations.

NOTE: The engagement of the pitch axis in Vertical Speed or Flight Path Angle and engagement of the lateral axis in Heading Hold, Heading Select, or Bank Angle Hold have been found to be acceptable.

(5) Heads Up Display (HUD). Since the HUD can display flight guidance, the HUD guidance mode should be indicated to both pilots and should be compatible with the active head–down flight director mode.

(6) Maneuvering Flight. Engagement during maneuvering flight should be considered.

(7) Engagement Outside Normal Flight Envelope. The design should consider the safety consequences, if it is possible for the flight director to engage outside of the normal flight envelope. It is not required that the flight director should compensate for unusual attitudes or other situations outside the normal flight envelope, unless that is part of the flight director's intended function.

b. Guidance Cue(s).

(1) Display. The flight director command guidance cue(s) will typically be displayed under the following conditions:

(a) When the flight director is selected and valid command guidance is available, or

(b) When the flight director is automatically providing guidance, as per paragraph c. below.

(2) Indication. The display of guidance cue(s), (for example, flight director bars) is sufficient indication that the flight director is engaged.

(3) Invalid Guidance. The flight director guidance cue(s) should be removed when guidance is determined to be invalid.

c. Reactive Windshear Guidance System. For airplanes equipped with a flight director windshear guidance system, flight director engagement should be provided, consistent with the criteria contained in AC 25–12 and AC 120-41.

2. FLIGHT DIRECTOR DISENGAGEMENT. There may be a means for each pilot to readily de-select his or her on–side flight director function. Flightcrew awareness of disengagement and de-selection is important. Removal of guidance cue(s) alone is not sufficient indication of de-selection, because the guidance cue(s) may be removed from view for a number of reasons, including invalid guidance or autopilot engagement. Therefore, the flight director function should provide clear and unambiguous indication, such as switch position or status, to the flightcrew that the function has been de-selected.

10. FGS ENGAGEMENT, DISENGAGEMENT, INDICATIONS, AND OVERRIDE

C. Autothrust

Engagement and disengagement should be accomplished in a manner consistent with other flightcrew procedures and tasks and should not require undue attention.

1. AUTOTHRUST ENGAGEMENT

a. Indication. The autothrust function should provide the flightcrew positive indication that the system has been engaged or disengaged.

b. Accessibility. The autothrust engagement controls should be accessible to each pilot.

c. Design. The autothrust function should normally be designed to prevent inadvertent engagement and inadvertent application of thrust for both on–ground and in–air operations. For example, separate arm and engage functions should be provided. However, intended modes, such as a "wake up" mode, to protect for unsafe speeds may be acceptable (see Chapter 12, Part F, Section 2 on Low Speed Protection). If such automatic engagement occurs, it should be clear to the flightcrew that automatic engagement has occurred. The automatic engagement should not cause any hazardous conditions, such as large, unexpected changes in pitch attitudes or pitching moments. The reason for automatic engagement should be clear and obvious to the flightcrew.

d. Engagement Outside Normal Flight Envelope. The design should consider the possibility that the pilot may attempt to engage the autothrust function outside of the normal flight envelope or at excessive (or too low) engine thrust. It is not expected that the autothrust feature should compensate for situations outside the normal flight envelope or normal engine operation range, unless that is part of the intended function of the autothrust system.

2. AUTOTHRUST DISENGAGEMENT

a. Indication. Positive indication of disengagement of the autothrust function should include at least a visual flightcrew alert and deletion of autothrust "engage" status annunciations.

(1) Automatic Disengagement. Visual indications should persist until canceled by flightcrew action.

(2) Manual disengagement.

(a) If an aural indication is not provided, visual indications should persist until canceled by flightcrew action.

(b) If an aural indication is provided, visual indications should persist for some minimum period. The aural alert should be of sufficient duration and volume to assure that the flightcrew has been alerted that disengagement has occurred. However, an extended cycle of an aural alert is not acceptable following disengagement, if such an alert can significantly interfere with flightcrew coordination or radio communication.

b. Design. The autothrust normally should be designed to preclude inadvertent disengagement during activation of autothrust modes of operation.

c. Consequences. Autothrust disengagement should not cause any hazardous conditions, such as large, unexpected changes in pitch attitude or pitching moment or significant thrust transient. The disengagement should not preclude, inhibit, or interfere with timely thrust changes for go-around, landing, or other maneuvers requiring manual thrust changes.

d. Caution Alert. Disengagement of the autothrust function is considered a Caution alert.

e. Autothrust Quick Disengagement Control. Autothrust quick disengagement controls should be provided for each pilot on the respective thrust control (thrust lever or equivalent). A single–action, quick disengagement switch should be incorporated on the thrust control, so that switch activation can be executed when the pilot's other hand is on the flight controls. The disengagement control should be positioned such that inadvertent disengagement of the autothrust function is unlikely. Positioning the control on the outboard side has been shown to be acceptable for multi–engine aircraft. Thrust lever knob, end–mounted disengagement controls available on both sides to facilitate use by either pilot have been shown to be preferable to those positioned to be accessible by the pilot's palm.

10. FGS ENGAGEMENT, DISENGAGEMENT, INDICATIONS, AND OVERRIDE

D. Override of the FGS

1. AUTOPILOT OVERRIDE.

a. With Automatic Disengagement

(1) Override Force. The autopilot should disengage when the flightcrew applies a significant override force to the controls. The applicant should interpret "significant" as a force that is consistent with an intention to overpower the autopilot by either or both pilots. The autopilot should not disengage by minor application of force to the controls, such as a pilot gently bumping the control column while entering or exiting a pilot seat during cruise.

> NOTE: Twenty-five pounds (25 lbs) of force at the control column or wheel has been determined to be a significant override force level for other than approach operations on some aircraft types. To reduce nuisance disengagement, higher forces have been found acceptable for certain approach, landing, and go-around operations on some aircraft. The force to disengage an autopilot is not necessarily the force required at the column to oppose autopilot control, that is, to cause elevator movement. The corresponding forces for a sidestick or centerstick controller may be different.

(2) No significant transients. In normal operating conditions, a significant transient should not result from autopilot disengagement when the flightcrew applies an override force to the controls (see § 25.1329 (d)).

(3) No hazardous conditions. Sustained application of force below the disengagement threshold should not result in a hazardous condition. For example, the automatic trim should not run, resulting in unacceptable airplane motion, if the autopilot were to automatically disengage or be manually disengaged (see § 25.1329 (l)).

b. Without Automatic Disengagement.

(1) No hazardous conditions. If the FGS is not designed to disengage in response to any override force, then the response should not result in a hazardous condition. Sustained application of an override force should not result in a hazardous or potentially hazardous condition. Mitigation may be

accomplished through provision of an appropriate Alert and flightcrew procedure. (see § 25.1329 (l)).

> NOTE: The term "sustained application of override force" is intended to describe a force that is applied to the controls which may be small, slow, and sustained for some period of time. This may be due to an inadvertent crew action or may be an intentional crew action meant to "assist" the autopilot in a particular maneuver. See Chapter 16, Part B, Section 6 for more information on this subject.

(2) No significant transients In normal operating conditions, a significant transient should not result from manual autopilot disengagement after the flightcrew has applied an override force to the controls (see § 25.1329 (d)).

> NOTE: The term "override force" is intended to describe a pilot action that is intended to prevent, oppose or alter an operation being conducted by a flight guidance function without first disengaging that function. One possible reason for this action could be an avoidance maneuver, such as responding to a TCAS Resolution Advisory that requires immediate action by the flightcrew and would typically involve a rapid and forceful input from the flightcrew.

NOTE: For Control Wheel Steering (CWS), see Chapter 13, Part D, Section 7.

2. AUTOTHRUST OVERRIDE

a. Force Required. It should be possible for the pilot to readily override the autothrust function and set thrust by moving the thrust levers (or equivalent) with one hand.

b. Response To Override. The autothrust response to a flightcrew override should not create a potential hazard (see § 25.1329 (m)). This means that the autothrust response to the flightcrew override should not result in an abrupt change of pitch attitude, an abrupt pitching moment, or an uncontrolled change of thrust.

c. Engagement Status With Override. Autothrust functions may be designed to safely remain engaged during pilot override. Alternatively, autothrust functions may disengage as a result of pilot override, provided that the design prevents unintentional autothrust disengagement and adequately alerts the flightcrew to ensure pilot awareness.

10. FGS ENGAGEMENT, DISENGAGEMENT, INDICATIONS, AND OVERRIDE

E. FGS Engagement Mode Compatibility

1. **FGS MODE ENGAGEMENT PHILOSOPHY**. The philosophy used for the mode at engagement of the autopilot, flight director, and autothrust functions should be provided in flightcrew training material.

2. **ENGAGEMENT MODE COMPATIBILITY.** It should not be possible to select incompatible FGS command or guidance functions, such as commanding speed through elevator and autothrust at the same time.

11. CONTROLS, INDICATIONS, AND ALERTS

A. General

1. HUMAN MACHINE INTERFACE. The interface with the FGS is crucial to ensuring safe, effective and consistent FGS operation. The manner in which FGS information is depicted to flightcrews is essential to flightcrew awareness and, therefore, to safe operation of the FGS.

2. DESIGN OF CONTROLS, INDICATIONS, AND ALERTS. These features should be designed so as to minimize flightcrew errors and confusion. Indications and alerts should be presented in a manner compatible with the procedures and assigned tasks of the flightcrew and provide the necessary information to perform those tasks. The indications should be grouped and presented in a logical and consistent manner and should be visible from each pilot's station under all expected lighting conditions. The choice of colors, fonts, font size, location, orientation, movement, graphical layout and other characteristics—such as steady or flashing—should all contribute to the effectiveness of the system. Controls, indications, and alerts should be implemented in a consistent manner.

3. EVALUATION OF INFORMATION PROVIDED BY FGS. It is recommended that the applicant evaluate the adequacy and effectiveness of the information provided by the FGS interface, that is the controls, indications, alerts, and displays, to ensure flightcrew awareness of FGS behavior and operation. See Section 16, Compliance Demonstration using Flight Test and Simulation for more discussion of appropriate analyses which may include, for example, cognitive task analysis as a basis for evaluation.

11. CONTROLS, INDICATIONS, AND ALERTS

B. FGS Controls

1. GENERAL. The FGS controls should be designed and located to provide convenience of operation to each crew member and to prevent crew errors, confusion and inadvertent operation. To achieve these objectives, § 25.1329 (f) requires that command reference controls to select target values, such as heading select or vertical speed, should operate as specified in § 25.777(b) for cockpit controls. The function and direction of motion of each control should be readily apparent or plainly indicated on or adjacent to each control, if needed to prevent inappropriate use or confusion. Section 25.781 also provides requirements for the shapes of the knobs.

2. DESIGN CONSIDERATIONS. The design of the FGS should address the following specific considerations:

a. Differentiation of Knob Shape and Position. Errors have included confusing speed and heading knobs on the mode selector panel.

b. Design to Support Correct Selection of Target Values. Use of a single control, such as concentric controls, for selecting multiple command reference targets has resulted in erroneous target value selection.

c. Commonality. Use of uniform control design in different aircraft prevents negative transfer of learning with respect to operation of the controls. Using knowledge about the operation of the controls on one type of airplane has resulted in activation of the incorrect control when pilots move from that type of airplane to another type of airplane.

d. Positioning. Individual FGS controls, FMAs, and related primary flight display information should be positioned so that, as much as reasonably practical, items of related function have similarly related positions. Misinterpretation and confusion have occurred due to the inconsistent arrangement of FGS controls with the annunciations on the FMA.

e. Inadvertent Operation. Design should discourage or avoid inadvertent operation, such as inadvertent engagement or disengagement.

11. CONTROLS, INDICATIONS, AND ALERTS

C. FGS Mode Selection, Annunciation, and Indication

1. ENGAGEMENT OF THE FGS. Engagement of the FGS functions should be suitably annunciated to each pilot, as described in Section 10, FGS Engagement, Disengagement, Indications, and Override.

2. DESCRIPTION OF FGS MODES. The operator should be provided with appropriate description of the FGS modes and their behavior.

3. FGS MODE ANNUNCIATIONS.

a. General. Mode annunciation should indicate the state of the system. Mode annunciation should be compatible with flightcrew procedures/ tasks and be consistent with the mode annunciation design for the specific aircraft type. That is, the mode annunciation should be compatible with other flight deck systems mode annunciations. Mode selector switch position or status is not acceptable as the sole means of mode annunciation. Modes and mode changes should be depicted in a manner that achieves flightcrew attention and awareness.

b. Active and Armed Modes. FGS mode annunciations should effectively and unambiguously indicate the active and armed modes of operation. The mode annunciation should convey explicitly—and as simply as possible—what the FGS is doing (for active modes), what it will be doing (for armed modes), and target information (such as selected speed, heading, and altitude) for satisfactory flightcrew awareness.

c. Location. Mode annunciations should be located in the forward field of view. That is, they should be located on the primary flight display. Engaged modes should be annunciated at different locations than armed modes to assist in mode recognition.

d. Type. Colors, font type, font size, location, highlighting, and symbol flashing have historical precedent as good discriminators, when implemented appropriately. The fonts and font size should be chosen so that annunciation of FGS mode and status information is readable and understandable without eye strain when viewed by the pilot seated at the design eye position. The use of graphical or symbolic (i.e., non-textual) indications is acceptable. Implementation of such discriminators should follow accepted guidelines, as described in applicable international standards (such as AC 25-11), and

should be evaluated for their consistency with and integration with the flight deck design.

e. Color. Color should be used in a consistent manner and assure compatibility with the overall use of color on the flight deck. Specific colors should be used such that the FGS displays are consistent with other flight deck systems, such as a Flight Management System. The use of monochrome displays is not precluded, provided that the aspects of flightcrew attention and awareness are satisfied. Engaged modes should be annunciated with different colors than armed modes to assist in mode recognition.

4. MODE CHANGES.

a. Operationally Relevant Mode Changes. Mode changes that are operationally relevant—especially mode reversions and sustained speed protection—should be clearly and positively annunciated to ensure flightcrew awareness. Altitude capture is an example of an operationally relevant mode that should be annunciated, because pilot actions may have different effects on the airplane. Annunciation of sustained speed protection should be clear and distinct to ensure flightcrew awareness. FGS sub–modes, (e.g., sub-modes as the FGS transitions from localizer capture to localizer track) that are not operationally relevant need not be annunciated.

b. Transitions. The transition from an armed mode to an engaged mode should provide an additional attention–getting feature, such as boxing and flashing on an electronic display (per AC 25-11) for a suitable, but brief, period (e.g., ten seconds) to assist in flightcrew awareness. Aural notification of mode changes should be limited to special considerations.

c. Use Of Alerts. In–service experience has shown that mode annunciation alone may be insufficient—unclear or not compelling enough—to communicate mode changes to the flightcrew, especially in high workload situations. Therefore, the safety consequences of the flightcrew not recognizing mode changes should be considered. If necessary, an appropriate alert should be used.

5. FAILURE TO ENGAGE OR ARM. It should be made clear to the pilot that a mode selected by the pilot has failed to arm or engage, especially due to invalid sensor data.

6. FGS MODE DISPLAY AND INDICATIONS. Mode information provided to the pilot should be sufficiently detailed, so that the consequences of the interaction can be determined unambiguously. Examples of the consequences are ensuing mode or system configurations that have operational relevance. The FGS interface should provide timely and positive indication when the flight guidance system deviates from the pilot's direct commands (e.g., a target altitude or speed setting) or from the pilot's pre-programmed set of commands (e.g., waypoint crossing). The interface should also provide clear indication when there is a difference or conflict between pilot-initiated commands. An example would be when a pilot engages positive vertical speed and then selects an altitude that is lower than the aircraft altitude. The default action taken by the FGS should be made apparent.

11. CONTROLS, INDICATIONS, AND ALERTS

D. FGS Alerting, Warning, Caution, Advisory, And Status

1. GENERAL

a. Alerting Provisions. Alerting information should follow the provisions of § 25.1322 and associated advisory material. Alerts for FGS engagement and disengagement are described in Chapter 10, FGS Engagement, Disengagement, Indications, and Override.

b. Monitoring. There should be some method for the flightcrew to determine and monitor the availability or capability of the Flight Guidance System (e.g., for dispatch), where the intended operation is predicated on the use of the FGS. The method of monitoring provided should take account of the hazard resulting from the loss of the autopilot function for the intended operation.

2. SPEED PROTECTION ALERTS

a. Alerts to Crew. To assure crew awareness, an alert should be provided when a sustained speed protection condition is detected. This is in addition to any annunciations associated with mode reversions that occur as a consequence of invoking speed protection (see Chapter 12, Part E Speed Protection).

b. Type

(1) Low Speed Protection. Low speed protection alerts should include both an aural and a visual component.

(2) High speed Protection. High-speed protection alerts need include only a visual alert component because of existing high–speed aural alert requirements, but does not preclude giving an earlier alert.

c. Consistency. Alerts for speed protection should be consistent with the protection provided and with the other alerts in the flight deck.

d. Nuisance Indications. Care should be taken to set appropriate values for indicating speed protection that would not be considered a nuisance for the flightcrew.

3. LOSS OF AUTOPILOT APPROACH MODE. The loss of the approach mode requires immediate flightcrew awareness. This may be accomplished through autopilot disengagement, as described in AC 120-28D. If the autopilot remains engaged and reverts to a non-approach mode, an appropriate aural warning and/or visual alert should be provided.

4. AWARENESS OF POTENTIAL SIGNIFICANT TRANSIENT CONDITION ("BARK BEFORE BITE")

a. GENERAL

(1) Crew Awareness. There have been situations where an autopilot was engaged, operating normally and controlling up to the limit of its authority for an extended period of time, and the flightcrew was unaware of the situation. This service experience has shown that, without timely flightcrew awareness and action, such a situation can progress to a loss of control after autopilot disengagement, particularly in rare normal or non-normal conditions. However, with adequate flightcrew awareness and pilot action, loss of control may be prevented.

(2) Alerts to Crew. To help ensure crew awareness and timely action, appropriate alert(s), (generally Caution or Warning) should be provided to the flightcrew for conditions that could require exceptional piloting skill or alertness for manual control following autopilot disengagement (e.g., significantly out of trim). The number and type of alerts required would be determined by the unique situations that are being detected and by the crew procedures required to address those situations. Any alert should be clear and unambiguous and should be consistent and compatible with other flight deck alerts. Care should be taken to set appropriate thresholds for these alerts so that they are not considered a nuisance for the flightcrew.

b. Situations to Consider for an Alert

(1) Sustained Lateral Control Command: If the autopilot is holding a sustained lateral control command, it could be indicative of an unusual operating condition for which the autopilot is compensating. Examples of such unusual operating conditions are asymmetric lift and/or drag due to asymmetric icing, fuel imbalance, and asymmetric thrust. In the worst case, the autopilot may be operating at or near its full authority in one direction. If the autopilot were to disengage while holding this lateral trim, the result would be that the airplane would undergo a rolling moment that could possibly take the pilot by surprise. Therefore, a timely alert should be considered to permit the crew to manually disengage the autopilot and take

control prior to any automatic disengagement which might result from the condition.

(2) Sustained Longitudinal Out of Trim: If the autopilot is holding sustained longitudinal trim, it could be indicative of an unusual operating condition (e.g., inoperative automatic horizontal trim) for which the autopilot is compensating. If the autopilot were to disengage while holding this longitudinal trim, the result would be that the airplane would undergo an abrupt change in pitch that could possibly take the pilot by surprise. Therefore, a timely alert should be considered to permit the crew to manually disengage the autopilot and take control prior to any automatic disengagement which might result from the condition.

(3) Bank and Pitch Angles: Most autopilots are designed with operational limits in both the pitch and roll axes, such that those predetermined limits will not be purposely exceeded. If the airplane exceeds those limits, it could be indicative of a situation that requires the pilot to intervene. Such a situation may not be covered by paragraphs (1) or (2) above. Therefore, a timely alert should bring this condition to the attention of the flightcrew and permit the crew to manually disengage the autopilot and take control prior to any automatic disengagement which might result.

c. Automatic disengagement. It is preferable that the autopilot remain engaged during out–of–trim conditions. However, if there is an automatic disengagement feature due to excessive out–of–trim, an alert should be generated and should precede any automatic disengagement with sufficient margin to permit timely flightcrew recognition and manual disengagement. See also Chapter 10, Part D Override of the FGS, for related material.

NOTE: This section is not intended to require alerting for all instances of automatic autopilot disengagement. It is intended only for conditions, which, if not addressed, would lead to disengagement that could result in a significant transient for which the pilot may be unprepared. The intent is to provide crew awareness that would allow the flightcrew to be prepared with hands on controls and take appropriate corrective action before the condition results in a potentially hazardous airplane configuration or state.

NOTE: This section describes alerting requirements for conditions resulting in unintended out–of–trim operation. There are FGS functions that can intentionally produce out-of-trim operation. Examples would be parallel rudder operation in align or engine failure compensation modes, pitch trim operation during the approach/landing to provide trim up/ flare spring bias, and pitch trim operation for

certain types of Speed/ Mach trim systems. It is not the intent of this section to require alerts for functions producing intentional out–of–trim conditions. Other system indications (e.g., mode and status annunciations) should be provided to make the crew aware of the operation of these functions where appropriate.

11. CONTROLS, INDICATIONS, AND ALERTS
E. Head-Up Displays (HUD)

1. GENERAL. Head-up displays (HUD) have unique characteristics compared to flight displays installed on the instrument panel. Most of these HUD differences are addressed during HUD certification whether or not the HUD provides flight guidance functions. The intent of this section is to address how such HUD differences may affect FGS functions. See SAE ARP-5288, Transport Category Airplane Head Up Display Systems for further information on this subject.

2. CHARACTERISTICS OF HUD GUIDANCE

a. Use of HUD. If the HUD is designed as a supplemental use display system, it does not replace the requirement for standard Head Down Display (HDD) of flight instrument data. The HUD is intended for use during takeoff, climb, cruise, descent, approach and landing under day, night, VMC and IMC conditions. When it can be reasonably expected that the pilot will operate primarily by reference to the HUD, it should be shown that the HUD is satisfactory for manually controlling the airplane and for monitoring the performance of the FGS system.

b. Symbology of HUD. During take off and landing in certain light and visibility conditions, HUD symbology can be extremely dominant in comparison to external visual references. When visual references are relatively dim, extremely active symbology dynamics and guidance cue gains can lead the pilot to make excessively strong corrections. It should be shown that—if HUD guidance cues are followed regardless of the appearance of external visual references—they do not cause the pilot to take unsafe actions.

c. Interference and Priority. It should be shown that there is no interference between the indications of primary flight information and the flight guidance cues. In take off, approach, and landing FGS modes, the flight guidance symbology should have occlusion priority. That is, the flight guidance symbology should not be obscured or covered by the primary flight information.

d. Display Criteria. Generally, the criteria for the mechanization of guidance displayed on the HUD would be no different than for guidance displayed on the head-down display. See Chapter 12, Performance of Function, for flight director performance criteria.

e. Conformal Symbology. Unlike head-down displays, HUD's are capable of displaying certain symbology conformal to the outside scene, including guidance cues. Consequently, the range of motion of this conformal symbology, including the guidance, can present certain challenges in rapidly changing and high crosswind conditions. In certain cases, the motion of the guidance and the primary reference cue may be limited by the field of view. It should be shown that, in such cases, the guidance remains usable and that there is a positive indication that it is no longer conformal with the outside scene.

f. Low Visibility Approach. HUD guidance is often used in cases, like the low visibility approach, where the pilot will need to reference both the information displayed on the HUD and outside references. Consequently, it should be shown that the location and presentation of the HUD information does not distract the pilot or obscure the pilot's outside view. For example, it would be necessary for the pilot to track the guidance to the runway without having the view of runway references or hazards along the flight path obscured by the HUD symbology.

3. HUD FLIGHT GUIDANCE SYSTEM DISPLAY. The HUD display should present flight guidance information in a clear and unambiguous manner. Display clutter should be minimized. The HUD guidance symbology should not excessively interfere with pilots' forward view, ability to visually maneuver the airplane, acquire opposing traffic, and see the runway environment. Some flight guidance data elements are essential or critical and should not be removed by any de-clutter function.

4. HEAD-UP/HEAD-DOWN DISPLAY COMPATIBILITY

a. Symbology. The HUD FGS symbology should be compatible and consistent with symbology on other FGS displays such as head-down electronic flight instruments. The FGS-related display parameters should be consistent to avoid misinterpretation of similar information, but the display presentations need not be identical. The HUD and head-down primary flight display formats and data sources need to be compatible to ensure that the same FGS-related information presented on both displays have the same intended meaning.

b. Guidelines. While not all information displayed on the HUD is directly related to the FGS, the pilot is likely to use most of the displayed information while using the HUD-displayed guidance and FGS annunciations. Therefore, when applicable, the guidelines below for the presentation of FGS-related display information should be followed as much as possible. Certain deviations from these guidelines may be appropriate due to conflict with

other information display characteristics or requirements unique to head-up displays. These may include minimization of display clutter, minimization of excessive symbol flashing, and the presentation of certain information conformal to the outside scene.

(1) Format. Symbols should be the same format. For example, a triangle-shaped pointer head–down should appear as a triangle pointer head-up. However, some differences in HUD symbology, such as the flight director "circle" versus head–down flight director "bars" or "wedge", have been found acceptable.

(2) Location. Information (symbols) should appear in the same general location relative to other information.

(3) Readouts. Alphanumeric readouts should have the same resolution, units, and labeling. For example, the command reference indication for "vertical speed" should be displayed in the same foot-per-minute increments and be labeled with the same characters as the head-down displays.

(4) Analog Scales. Analog scales or dials should have the same range and dynamic operation. For example, a Glideslope Deviation Scale displayed head–up should have the same displayed range as the Glideslope Deviation Scale displayed head–down, and the direction of movement should be consistent.

(5) Display of FGS Modes. FGS modes (e.g. autopilot, flight director, autothrust) and status state transitions should be displayed on the HUD using consistent methods, except for the use of color. That is, the method used head–down to indicate a flight director mode transitioning from armed to captured should also be used head–up.

(6) Information Sources. Information sources should be consistent between the HUD and the head-down displays used by the same pilot.

(7) Display of FGS Command Information. When FGS command information (e.g., a flight director command) is displayed on the HUD in addition to the head-down displays, the HUD depiction and guidance cue deviation "scaling" needs to be consistent with that used on the head–down displays. This is intended to provide comparable pilot performance and workload when using either head–up or head–down displays.

(8) Display for Pilot Not Flying. The same information concerning current HUD system mode, reference data, status state transitions, and alert

information that is displayed to the pilot flying on the HUD should also be displayed to the pilot not flying using consistent nomenclature to ensure unambiguous awareness of the HUD operation.

5. ALERTING ISSUES

a. Alerts Displayed on HUD's. Although HUD's are typically not intended to be classified as integrated caution and warning systems, they may display Warnings, Cautions, and advisories as part of their FGS function. In this regard, HUD's should provide the equivalent alerting functionality as the head–down primary flight display(s). Warnings that require continued flightcrew attention on the PFD also should be presented on the HUD (e.g., TCAS, Windshear, and Ground Proximity Warning annunciations). If master alerting indications are not provided within the peripheral field of view of the pilot while using the HUD, the HUD should provide annunciations that inform the pilot of Caution and/or Warning conditions.

b. Monochrome HUD's. For monochrome HUD's, appropriate use of attention-getting properties, such as flashing, outline boxes, brightness, size, and/or location are necessary to adequately compensate for the lack of color normally assigned to distinguish and call attention to Cautions and Warnings.

c. Multi–color HUD's. For multi-color HUD's, the use of red, amber, or yellow for symbols not related to caution and warning functions should be avoided, so that the effectiveness of distinguishing characteristics of true Warnings and Cautions is not reduced.

d. Single HUD Installation. Single HUD installations rely on the fact that the non–flying pilot will monitor the head–down instruments and alerting systems for failures of systems, modes, and functions not associated with primary flight displays.

e. Dual HUD Installations. Dual HUD installations require special consideration for alerting systems. It should be assumed that both pilots will be head–up simultaneously (full or part-time), especially when the HUD is being used as the primary flight reference or when the HUD is required equipment for the operation being conducted. If master alerting indications are not provided within the peripheral field of view of each pilot while using the HUD, then each HUD should provide annunciations that direct the pilot's attention to head–down alerting displays. The types of information that should trigger the HUD master alerting display are any Cautions or Warnings not already duplicated on the HUD from head–down primary display as well as any Caution level or Warning level engine indications or system alerts.

NOTE: The objective is to avoid redirecting attention of the pilot flying to other display when an immediate maneuver is required (e.g., resolution advisory, windshear).

f. GPWS/ TCAS Alerts on HUD. If a Ground Proximity Warning System (GPWS), wind shear detection system, wind shear escape guidance system, or a Traffic alert and Collision Avoidance System (TCAS) is installed, then the guidance, warnings and annunciations required to be a part of these systems and normally required to be in the pilot's primary field of view should be displayed on the HUD.

6. UPSET/UNUSUAL ATTITUDE RECOVERY GUIDANCE

a. Recovery from Upsets. Upsets due to wake turbulence or other environmental conditions may result in near instantaneous excursions in pitch and bank angles and a subsequent unusual attitude. If the HUD is designed to provide guidance for recovery from upsets or unusual attitudes, recovery steering guidance commands should be distinct from and not confused with orientation symbology such as horizon "pointers." For example, a cue for left stick input should not be confused with a cue indicating direction to the nearest horizon. Guidance should be removed, if cues become invalid at extreme attitudes, such as zenith, nadir, overbanked (for example, greater than 90 degrees bank angle), or inverted. For extreme attitudes it is acceptable to transition to the HDD, provided that the cues to transition from the HUD are clear and unambiguous.

b. Cues. If the HUD is designed to provide orientation only during upsets or unusual attitudes, cues should be designed to prevent them from being mistaken as flight control input commands.

12. PERFORMANCE OF FGS FUNCTION

A. General Considerations

1. INTENDED FUNCTION. The FGS should provide guidance or control, as appropriate, for the intended function of the active mode(s) in a safe and predictable manner within the airplane's normal flight envelope. There are special considerations when the FGS is operating at the limits of its performance capabilities or under significant environmental conditions. The following sections provide criteria for acceptable means of compliance and interpretive material pertaining to these considerations.

2. EFFECT OF SYSTEM TOLERANCES. Where system tolerances have a significant effect on autopilot authority limits, consideration should be given to the effect on autopilot performance. Factors to be considered include, but are not limited to, tolerances of servo authority, servo clutch setting, "cam-out" settings, control friction, and sensor tolerances.

12. PERFORMANCE OF FUNCTION
B. Normal Performance

1. DESIGN

a. Design Standard. The FGS should be designed to provide guidance or control, as appropriate, for the intended function of the active mode(s) in a safe and predictable manner within the airplane's normal flight envelope.

b. Conditions to Consider. The FGS should be designed to provide acceptable performance under the conditions discussed in the following table. This table does not fully define every condition that may be encountered during an airplane's life and unequivocally categorize what can be considered to be a "normal condition". Rather, the table is intended to give examples to be used during system development and testing. By the very nature of the phenomena involved, there will always be some subjectivity to these categorizations. Also, the same conditions may affect different airplane models in very different ways. These differences should be considered in determining how to characterize the severity of the conditions discussed in the table.

Table 12A
Examples of Normal Conditions

No failure conditions	All airplane systems that are associated with airplane performance are fully operational. Failures of those systems could impair the flight guidance system's ability to perform its functions.
Light to moderate winds	Constant wind in a specific direction that may cause a slight deviation in intended flight path or a small difference between airspeed and groundspeed.
Light to moderate wind gradients	Variation in wind velocity—as a function of altitude, position, or time—which may cause slight erratic or unpredictable changes in intended flight path.
Light to moderate gusts	Non–repetitive momentary changes in wind velocity that can cause changes in altitude and/or attitude to occur, but the aircraft remains in positive control at all times.
Light turbulence	Turbulence that momentarily causes slight, erratic changes in altitude and/or attitude (pitch, roll, or yaw).
Moderate turbulence	Similar to light turbulence but of greater intensity. Changes in altitude and/or attitude occur, but the aircraft remains in positive control at all times.
Light chop	Turbulence that causes slight, rapid, and somewhat rhythmic bumpiness without appreciable changes in altitude or attitude.
Moderate chop	Similar to light chop but of greater intensity. It causes rapid bumps or jolts without appreciable changes in aircraft altitude or attitude.
Icing	All icing conditions covered by 14 CFR Part 25, Appendix C, with the exception of "asymmetric icing" discussed under "Rare Normal Conditions" in Table 12B.

NOTE: Representative levels of the environmental effects should be established consistent with the airplane's intended operation.

2. LEVEL OF PERFORMANCE

a. Significant Characteristics. Any performance characteristics that are operationally significant or operationally limiting should be identified with an appropriate statement or limitation in the Airplane Flight Manual (AFM).

b. Configuration Changes. The FGS should perform its intended function during routine airplane configuration or power changes, including the operation of secondary flight controls and landing gear.

c. Evaluation. Evaluation of FGS performance for compliance should be based on the minimum level of performance needed for its intended functions. Subjective judgment may be applied to account for experience acquired from similar equipment and levels that have been established as operationally acceptable by the end–user.

d. Specific Levels Of Performance. There are certain operations that dictate a prescribed level of performance. When the FGS is intended for operations that require specific levels of performance, the use of FGS should be shown to meet those specific levels of performance (e.g., Low Visibility Operations – Category II and III operations, Reduced Vertical Separation Minimums (RVSM), Required Navigation Performance (RNP)).

e. Equivalence of Performance. The FGS performance of intended functions should at least be equivalent to that expected of a pilot for a similar task. The Flight Test Guide (AC 25-7A) and the Autopilot, Flight Director and Autothrust Systems SAE ARP 5366 may prove useful for establishing the general behavior of the FGS. When integrated with navigation sensors or flight management systems, the FGS should satisfy the flight technical error tolerances expected for the use of those systems in performing their intended functions.

f. Autopilot. The autopilot should provide smooth and accurate control without divergent or perceptible sustained nuisance oscillation.

g. Flight Director. The flight director, in each available display presentation (e.g., single cue, cross–pointer, flight path director) should provide smooth and accurate guidance and be appropriately damped, so as to achieve satisfactory control task performance without pilot compensation or excessive workload.

h. Autothrust. The autothrust function should provide smooth and accurate control of thrust without significant or sustained oscillatory power changes or excessive overshoot of the required power setting.

i. Automatic Trim. The automatic pitch trim function should operate at a rate sufficient to mitigate excessive control surface deflections or limitations of control authority without introducing adverse interactions with automatic control of the aircraft. Automatic roll and yaw trim functions, if installed, should operate without introducing adverse interactions with automatic control of the aircraft.

12. PERFORMANCE OF FUNCTION

C. Performance In Rare Normal Conditions

1. RANGE OF CONDITIONS. The FGS will encounter a wide range of conditions in normal operations, some of which may be infrequent but levy a greater than average demand on the FGS capabilities. Certain environmental conditions, as discussed in Section 3.b. below, are prime examples. FGS performance during such rare normal conditions should be assessed.

2. EFFECT ON PERFORMANCE. Rare normal conditions may degrade the performance of the FGS but should be safe for operation of the FGS. The relative infrequency of such conditions may also be a factor in the flightcrew's ability to detect and mitigate in a timely manner any limited capability of the FGS to cope with them.

3. AUTOPILOT DISENGAGEMENT

a. Operation of Autopilot. Operations in rare normal conditions may result in automatic or pilot-initiated autopilot disengagement close to the limit of autopilot authority. Autopilot disengagement in rare normal conditions should meet the safety criteria for autopilot disengagement found in Chapter 10, Part A, Section 2 and the criteria for flight guidance alerting in Chapter 11, Part D.

b. Design of Autopilot. It is not necessary that the FGS always be disengaged when rare normal conditions which may degrade its performance or capability are encountered. Actually, the FGS may significantly help the flightcrew during such conditions. However, the design should address the potential for the FGS to mask a condition from the flightcrew or to otherwise delay appropriate flightcrew action. See Chapter 11, Part D, Flight Guidance Alerting for discussion of alerting under such conditions.

4. DESIGN.

a. Design Standard. For rare normal conditions, the FGS should be designed to provide guidance or control, as appropriate, for the intended function of the active mode(s) in a safe and predictable manner, both within the normal flight envelope and for momentary excursions outside the normal flight envelope. The FGS should be limited from operating in environmental conditions in which it cannot be safely operated.

b. Conditions to Consider. The design of the FGS should consider the rare normal conditions listed in the following table. This table does not fully define every condition that may be encountered during an airplane's life and unequivocally categorize what can be considered to be a "rare normal condition". Rather, the table is intended to give examples to be used during system development and testing. By the very nature of the phenomena involved, there will always be some subjectivity to these categorizations. Also, the same conditions may affect different airplane models in very different ways. These differences should be considered in determining how to characterize the severity of the conditions discussed in the table.

Table 12B
Examples of Rare Normal Conditions

Significant winds	Constant wind in a specific direction that may cause a large change in intended flight path or groundspeed or cause a large difference between airspeed and groundspeed.
Significant wind gradients	Variation in wind velocity—as a function of altitude, position, or time—which may cause large changes in intended flight path.
Windshear/microburst	A wind gradient of such magnitude that it may cause damage to the aircraft.
Large gusts	Non-repetitive momentary changes in wind velocity that can cause large changes in altitude and/or attitude to occur. Aircraft may be momentarily out of control.
Severe turbulence	Turbulence that causes large, abrupt changes in altitude or attitude. It usually causes large variations in indicated airspeed. Aircraft may be momentarily out of control.
Asymmetric icing	Icing conditions that result in ice accumulations that causes the flight guidance system, if engaged, to counter the aerodynamic effect of the icing conditions with a sustained pitch, roll, or yaw command that approaches its maximum authority.

NOTE: Airplanes intended to meet § 121.358 for windshear warning and guidance need flight director windshear guidance. The FGS may also provide suitable autopilot control during windshear. Refer to Advisory Circulars AC 25–12 and AC 120–41 for windshear guidance system requirements.

12. PERFORMANCE OF FUNCTION
D. Icing Considerations in Normal and Rare Normal Conditions

a. Effect on Performance. The FGS typically will be designed to provide acceptable performance in all standard airplane configurations. Operating an airplane in icing conditions can have significant implications on the aerodynamic characteristics of the airplane (e.g., ice accretion on wings, tail, and engines) and, consequently, on FGS performance. Ice accretion may be slow, rapid, symmetric, or asymmetric. During autopilot operation, the flightcrew may not be aware of the gradual onset of icing conditions or the effect that the accumulation of ice is having on the handling qualities of the airplane.

b. Alerts. Means should be provided to alert the flightcrew when icing conditions begin to have an effect upon FGS performance, as described in Chapter 11, Part D.

c. Effect On Speed Protection. The implication of icing conditions on speed protection should be assessed. If the threshold of the stall warning system is adjusted due to icing conditions, appropriate adjustments should also be made to the FGS low speed protection threshold.

12. PERFORMANCE OF FUNCTION

E. Performance In Non-normal Conditions

The FGS will occasionally be operating when the airplane transitions outside of its normal flight envelope, due to failures or non–standard ferry configurations.. Under such circumstances, the FGS characteristics and flightcrew interaction with the FGS should be shown to be safe.

The following table shows examples of non–normal conditions. The table does not fully define every condition that may be encountered during an airplane's life and unequivocally categorize what can be considered to be a "non–normal condition". Rather, the table is intended to give examples to be used during system development and testing. By the very nature of the phenomena involved, there will always be some subjectivity to these categorizations. Also, the same conditions may affect different airplane models in very different ways. These differences should be considered in determining how to characterize the severity of the conditions discussed in the table.

Table 12C
Examples of Non-normal Conditions

Significant Fuel Imbalance	Large variation of the amount of fuel between the two wing tanks (and center and tail tanks, if so equipped) that causes the flight guidance system, if engaged, to counter the aerodynamic effect of the fuel imbalance with a pitch, roll, or yaw command that is approaching maximum system authority.
Asymmetric lift or drag	Asymmetric lift between the left and right wings due to high lift or primary flight control system failures or to damage to the aerodynamic surfaces on wing or tail.
Inoperative Engine(s)	Loss of one or more engines that causes the flight guidance system, if engaged, to counter the aerodynamic effect of the difference in thrust with a pitch, roll, or yaw command that is approaching maximum system authority.
Loss of one or more hydraulic systems	Loss of one or more hydraulic systems down to the minimum amount of remaining operational systems which the FGS is certified to operate.
Inoperative Ice Detection/ Protection System	Loss of ice detection/ protection system on an airplane so equipped where the FGS is certified for operation in icing conditions with that failure present.

12. PERFORMANCE OF FUNCTION
F. Speed Protection

1. GENERAL REQUIREMENTS

a. Speed Excursions. The requirement for speed protection is based on the premise that reliance on flightcrew attentiveness to airspeed indications alone during FGS operation is not adequate to avoid unacceptable speed excursions outside the speed range of the normal flight envelope. Many existing FGS systems have no provisions to avoid speed excursions outside the normal flight envelope. Some FGS systems will remain engaged until the aircraft slows to stall conditions and also to speeds well above V_{MO}/M_{MO}.

b. Compliance with § 25.1329 (h). The intent of § 25.1329 (h) is for the FGS to provide a speed protection function for all operating modes, so that the airspeed can be safely maintained within an acceptable margin of the speed range of the normal flight envelope. The FGS design may use any of the following ways or a combination of ways to provide acceptable low speed protection.

(1) <u>FGS Provides Speed Protection</u>. In this case, the following are acceptable means to comply with this rule:

(a) The FGS may detect the speed protection condition, alert the flightcrew, and provide speed protection control or guidance.

(b) The FGS may detect the speed protection condition, alert the flightcrew, and then disengage the FGS.

(c) The FGS may detect the speed protection condition, alert the flightcrew, and remain engaged in the active mode without providing speed protection control or guidance.

(2) <u>Other Systems Provide Speed Protection</u>. Other systems, such as the primary Flight Control System or the FMS (when in a VNAV mode) may be used to provide equivalent speed protection.

> NOTE: If compliance with this requirement is based on use of alerting alone, the alerts should be shown to be appropriate and timely to ensure flightcrew awareness and enable the pilot to keep the airplane within an acceptable margin from the speed range of the normal flight envelope. See Chapter 11, Part D, Section 2 for additional discussion of speed protection alerting.

c. **Design**

(1) Interaction of FGS elements. The design should consider how and when the speed protection is provided for combinations of autopilot, flight directors, and autothrust operation. Care should be taken to set appropriate values for transitioning into and out of speed protection that the flightcrew does not consider a nuisance.

(2) Integration. The speed protection function should integrate pitch and thrust control. Consideration should be given to automatically activating the autothrust function when speed protection is invoked. If an autothrust function is either not provided or is unavailable, speed protection should be provided through pitch control alone.

(3) Interaction of Systems. The role and interaction of autothrust with elements of the FMS, the primary flight control system, and the propulsion system, as applicable, should be accounted for in the design for speed protection.

(4) Engine Inoperative. Consideration should be given to the effects of an engine inoperative condition on the performance of speed protection.

2. LOW SPEED PROTECTION

a. **Methods**. The FGS design may use any one or a combination of ways to provide acceptable low speed protection.

b. **Activation**.

(1) Insufficient thrust. When the FGS is engaged in any modes (with the possible exception of approach, as discussed in paragraph c. below) for which the available thrust is insufficient to maintain a safe operating speed, the low speed protection function should be invoked to avoid unsafe speed excursions.

(2) Factors to Consider. Activation of speed protection should take into account such factors as the phase of flight, turbulence and gusty wind conditions, and compatibility with the speed schedules. The low speed protection function should activate at a suitable margin to Stall Warning that will not result in nuisance alerts. Consider the operational speeds, as specified in the Airplane Flight Manual (AFM), for all–engine and engine-inoperative cases during the following phases of flight:

(a) Takeoff.

(b) During departure, climb, cruise, descent, and terminal area operations, airplanes are normally operated at or above the minimum maneuvering speed for the given flap configuration.

> NOTE: For high altitude operations, it may be desirable to incorporate low speed protection at the appropriate engine out drift–down speed schedule, if the FGS (or other integrated sensors/systems) can determine that the thrust deficiency is due to an engine failure.

(c) Approach.

> NOTE: A low speed alert and a transition to the speed protection mode at approximately $1.2V_S$ or an equivalent speed defined in terms of V_{SR} for the landing flap configuration has been found to be acceptable.

(d) Transition from approach to go–around and go–around climb.

c. Low Speed Protection during Approach

(1) Non–interference. Speed protection should not interfere with the approach and landing phases of flight.

(2) Autothrust Operation. It is assumed that with autothrust operating normally, the combination of thrust control and pitch control during the approach will be sufficient to maintain speed and desired vertical flight path. In cases where it is not, an alert should be provided in time for the flightcrew to take appropriate corrective action.

(3) Defined Vertical Path. For approach operations with a defined vertical path (e.g., ILS, MLS, GLS, LNAV/VNAV), if the thrust is insufficient to maintain both the desired flight path and the desired approach speed, there are several ways to meet the intent of low speed protection:

(a) The FGS may maintain the defined vertical path as the airplane decelerates below the desired approach speed until the airspeed reaches the low speed protection value. At that time the FGS would provide guidance to maintain the low speed protection value as the airplane departs the defined vertical path. The FGS mode reversion and low speed alert should be activated to ensure pilot awareness.

NOTE: The pilot is expected to take corrective action to add thrust and return the airplane to the defined vertical path or go–around, as necessary.

(b) The FGS may maintain the defined vertical path as the airplane decelerates below the desired approach speed to the low speed protection value. The FGS will then provide a low speed alert while remaining in the existing FGS approach mode.

NOTE: The pilot is expected to take corrective action to add thrust to cause the airplane to accelerate back to the desired approach speed while maintaining the defined vertical path or go–around, as necessary.

(c) The FGS may maintain the defined vertical path as the airplane decelerates below the desired approach speed until the airspeed reaches the low speed protection value. The FGS will then provide a low speed alert and disengage.

NOTE: The pilot is expected to take corrective action when alerted to the low speed condition and the disengagement of the autopilot, to add thrust, and to manually return the airplane to the desired vertical path or go–around.

(4) Vertical Flight Path Not Protected. If the speed protection is invoked during approach such that vertical flight path is not protected, the subsequent behavior of the FGS after speed protection should be carefully considered. Activating low speed protection during the approach, resuming the approach mode, and re–acquiring the defined vertical path may be an acceptable response, if the activation is sufficiently brief and not accompanied by large speed or path deviations. This response is considered consistent with criteria for Category III automatic landing systems in AC 120-28D, Appendix 3, Section 8.1 Automatic Flight Control Systems which states that it should not be possible to change the flight path of the airplane with the automatic pilot(s) engaged, except by initiating an automatic go–around.

d. Windshear Recovery Guidance. The interaction between low speed protection and windshear recovery guidance is a special case. Windshear recovery guidance that meets the criteria found in Advisory Circulars AC 25-12 and AC 120-41 provides the necessary low speed protection when it is activated and is considered to be acceptable for compliance with § 25.1329(h). The autopilot should be disengaged when the windshear

recovery guidance activates, unless autopilot operation has been shown to be safe in these conditions and provides effective automatic windshear recovery that meets the criteria found in the advisory circulars referenced above.

3. HIGH SPEED PROTECTION

a. General Requirement. Section 25.1329(h) states that means must be provided to avoid excursions beyond an acceptable margin from the speed range of the normal flight envelope. V_{MO} and M_{MO} mark the upper speed limit of the normal flight envelope. This is not intended to require or preclude high speed protection based on airplane configurations (e.g., flaps extended).

b. Design

(1) Factors to Consider

(a) The duration of airspeed excursions, rate of airspeed change, turbulence, and gust characteristics.

(b) Operations at or near V_{MO}/M_{MO} in routine atmospheric conditions (e.g., light turbulence) are safe. Small, brief excursions above V_{MO}/M_{MO} by themselves are not unsafe.

(c) The FGS design should strive to strike a balance between providing adequate speed protection margin and avoiding nuisance activation of high-speed protection.

NOTE: The following factors apply only to designs that provide high-speed protection through FGS control of airspeed.

(2) High speed protection in altitude hold mode.

(a) Climbing to control airspeed is not desirable, because departing an assigned altitude can be disruptive to ATC and potentially hazardous (e.g., in RVSM airspace). As long as the speed does not exceed a certain margin beyond V_{MO}/M_{MO} (e.g., six knots), it is better that the FGS remain in altitude hold mode.

(b) The autothrust function, if operating normally, should effect high-speed protection by limiting its speed reference to the normal speed envelope (i.e., at or below V_{MO}/M_{MO}).

(c) The basic airplane high–speed alert should be sufficient for the pilot to recognize the overspeed condition and take corrective action to reduce thrust. However, if the airspeed exceeds a margin beyond V_{MO}/M_{MO} (e.g., six knots), the FGS may transition from altitude hold to the overspeed protection mode and depart (i.e., climb above) the selected altitude.

(3) High speed protection during climbs and descents.

(a) When the elevator channel of the FGS is not controlling airspeed, the autothrust function, if engaged, should reduce thrust, as needed to prevent sustained airspeed excursions beyond V_{MO}/M_{MO} (e.g., six knots) down to the minimum appropriate value.

(b) When thrust is already the minimum appropriate value or the autothrust function is not operating, the FGS should begin using the elevator channel, as needed, for high-speed protection.

(c) If conditions are encountered that result in airspeed excursions above V_{MO}/M_{MO}, it is preferable for the FGS to smoothly and positively guide or control the airplane back to within the speed range of the normal flight envelope.

13. CHARACTERISTICS OF SPECIFIC MODES

A. General

There are certain operational modes of the FGS that have been implemented in different ways in different airplanes and systems. The following sections provide (1) guidance and interpretative material that clarifies the operational intent of these modes and (2) criteria shown to be acceptable in current operations. The guidance in this section does not preclude other mode implementations. Pilot understanding of the mode behavior is especially important to avoid confusion. Therefore, mode behavior should be clearly annunciated, as described in Chapter 11, Part C, FGS Mode Selection, Annunciation, and Indication).

B. Lateral Modes

1. GENERAL. This section discusses modes that are implemented in many flight guidance systems that are used primarily for lateral/directional control of the airplane. The criteria below identify acceptable mode operation, based on past operational experience gained from the use of these modes.

2. HEADING OR TRACK HOLD. In the Heading or Track Hold mode, the FGS should maintain the airplane heading or track. When the airplane is in a bank when the Heading or Track Hold mode is engaged, the FGS should roll the airplane to a wings–level condition and maintain the heading or track when wings–level is achieved (typically less than five degrees of bank angle).

3. HEADING OR TRACK SELECT. In the Heading or Track Select mode, the FGS should expeditiously acquire and maintain a "selected" heading or track value consistent with occupant comfort. When the mode is initially engaged, the FGS should turn the airplane in a direction that is the shortest heading (or track) change to acquire the new heading (or track). Once the heading/track select mode is active, changes in the selected value should result in changes in heading/track. The FGS should always turn the airplane in the same direction as the sense of the selected heading change (e.g., if the pilot turns the heading select knob clockwise, the airplane should turn to the right), even if the shortest heading (or track) change is in the opposite direction. Target heading or track value should be presented to the flightcrew.

4. LATERAL NAVIGATION MODE (LNAV).

a. Lateral Flight Path. In the LNAV mode, the FGS should acquire and maintain the lateral flight path commanded by a flight management function (that is, FMS or equivalent).

b. Automatic Mode Transitions. If the airplane is not on the desired lateral path or within the designed path capture criteria when LNAV is selected, the FGS LNAV mode should enter an armed state. The FGS should transition from the armed state to an engaged state at a point where the lateral flight path can be smoothly acquired and tracked.

c. Takeoff or Go–Around. For an FGS incorporating the LNAV mode during the takeoff or go–around phase, the design should specify maneuvering capability immediately after takeoff and any limits that may exist. After takeoff or go–around, maneuvering should be based upon aircraft performance with the objective to prevent excessive roll attitudes where wingtip/runway impact becomes probable, yet satisfy operational requirements where terrain and/or thrust limitations exist.

13. CHARACTERISTICS OF SPECIFIC MODES

C. Vertical Modes

1. GENERAL. This section discusses modes that are implemented in many flight guidance systems that are used primarily for pitch control of the airplane. The criteria identified reflect operational experience gained from the use of these modes.

2. TARGET ALTITUDE SELECTION. To avoid unconstrained climbs or descents for any altitude transitions when using applicable vertical modes, the altitude select controller should be set to a new target altitude before the vertical mode can be selected. If the design allows the vertical mode to be selected before setting the target altitude, then consideration should be given to the potential vulnerability of unconstrained climb or descent leading to an altitude violation or Controlled Flight into Terrain. Consideration should also be given to appropriate annunciation of the deviation from previously selected altitude and / or subsequent required pilot action to reset the selected altitude.

3. VERTICAL SPEED MODE. In the Vertical Speed mode, the FGS should smoothly acquire and maintain a selected vertical speed. Consideration should be given to the situation where the selected value is outside the performance capability of the airplane. Another situation to consider is use of vertical speed mode without autothrust. These situations could potentially lead to a low-speed or high-speed condition and corresponding pilot awareness vulnerabilities. See Chapter 12, Part F- for discussion of acceptable means of compliance when dealing with such situations.

4. FLIGHT PATH ANGLE MODE. In the Flight Path Angle mode, the FGS should smoothly acquire and maintain the selected flight path angle. Consideration should be given to the situation where the selected value is outside the performance capability of the airplane. The use of flight path angle mode without autothrust—potentially leading to a low-speed or high-speed condition and corresponding pilot awareness vulnerabilities—should also be considered. Acceptable means of compliance have included a reversion to an envelope protection mode or a timely annunciation of the situation.

5. AIRSPEED (IAS)/ MACH HOLD [SPEED ON ELEVATOR]. In the Airspeed/ Mach Hold mode, the FGS should maintain the airspeed or Mach at the time of engagement.

6. AIRSPEED (IAS)/ MACH SELECT MODE [SPEED ON ELEVATOR]. In the Airspeed/ Mach Select mode, the FGS should acquire and maintain a selected airspeed or Mach. The selected airspeed or Mach may be either pre–selected or synchronized to the airspeed or Mach at the time of engagement.

7. FLIGHT LEVEL CHANGE (FLCH) [SPEED ON ELEVATOR]. In the FLCH mode, the FGS should change altitude in a coordinated way with thrust control on the airplane. The autopilot/ flight director will typically maintain speed control through the elevator. The autothrust function, if engaged, will control the thrust to the appropriate value for climb or descent.

8. ALTITUDE CAPTURE MODE

a. Mode Transition. The Altitude Capture mode should command the FGS to transition from a vertical mode to smoothly capture and maintain the selected target altitude with consideration of the rates of climb and descent experienced in service.

b. Guidelines for Altitude Capture Mode. In–service experience has shown that certain implementations have the potential to cause pilot confusion that may lead to altitude violations. Accordingly, the following are guidelines for the Altitude Capture mode:

(1) Automatic arming of mode. The Altitude Capture mode should be automatically armed to ensure capture of the selected altitude. Annunciation of the armed status is not required, if the Altitude Capture mode is armed at all times. If the FGS is in Altitude Capture, it should be annunciated.

(2) Engage from any vertical mode. The Altitude Capture mode should engage from any vertical mode, if the computed flight path will intercept the selected altitude and the altitude capture criteria are satisfied, except as specified during an approach, (e.g., when the glidepath for approach mode is active).

(3) Changing climb/ descent command references. Changes in the climb/ descent command references, with the exception of those made by the flightcrew using the altitude select controller, should not prevent capture of the target altitude.

(4) Capturing selected altitude. The Altitude Capture mode should smoothly capture the selected altitude, using an acceptable acceleration limit and pitch attitude with consideration for occupant comfort.

(5) Minimizing acceleration overshoot. The acceleration limit may, under certain conditions, result in an overshoot. To minimize the altitude overshoot, the normal acceleration limit may be increased, consistent with occupant safety.

(6) Selecting other vertical modes. Pilot selection of other vertical modes at the time of altitude capture should not prevent or adversely affect the level off at the target altitude. One means of compliance is to inhibit transition to other pilot–selectable vertical modes (except altitude hold, go–around, and approach modes) during altitude capture, unless the target altitude is changed. If glidepath capture criteria are satisfied during altitude capture, then the FGS should transition to glidepath capture.

(7) Changing target altitude. The FGS should be designed to minimize flightcrew confusion concerning the FGS operation when the target altitude is changed during altitude capture. It should be suitably annunciated and appropriate for the phase of flight.

(8) Adjusting datum pressure. Adjusting the datum pressure at any time during altitude capture should not result in loss of the capture mode. The transition to the pressure altitude should be accomplished smoothly.

(9) Maintaining reference airspeed. If the autothrust function is active during altitude capture, the autopilot and autothrust functions should be designed such that the FGS maintains the reference airspeed during the level-off maneuver. For example, if the autopilot changes from speed mode to an altitude capture or control mode, then autothrust should transition to a speed mode to maintain the reference airspeed.

9. ALTITUDE HOLD MODE

a. Entering Mode. The Altitude Hold mode may be entered either by flightcrew selection or by transition from another vertical mode.

b. Pilot Selection.

(1) Level flight. When initiated by pilot action in level flight, the Altitude Hold mode should provide guidance or control to maintain altitude at the time the mode is selected.

(2) Climbing or descending. When initiated by pilot action when the airplane is either climbing or descending, the FGS should immediately initiate a pitch change to arrest the climb or descent and maintain the altitude when level flight (e.g., less than 200 feet per minute) is reached. The intensity of the leveling maneuver should be consistent with occupant comfort and safety.

c. Automatic Transition. When initiated by an automatic transition from altitude capture, the Altitude Hold mode should provide guidance or control to the selected altitude.

d. Mode Transition Annunciation. Automatic transition into the Altitude Hold mode from another vertical mode should be clearly annunciated for flightcrew awareness.

e. Barometric Pressure Adjustment. Any airplane response due to an adjustment of the datum pressure should be smooth.

10. VERTICAL NAVIGATION MODE (VNAV)

a. FMS Path.

(1) Acquire vertical path. In the VNAV mode, the FGS should acquire and maintain the vertical flight path commanded by a flight management function (that is, FMS or equivalent). If the airplane is not on the desired FMS path when the VNAV mode is selected, the FGS VNAV mode should go into an armed state or provide guidance to smoothly acquire the FMS path. The flightcrew should establish the airplane on a flight profile to intercept the desired FMS path. The FGS should transition from the armed state to an engaged state at a point where the FGS can smoothly acquire and track the FMS path.

(2) Deviation from vertical path. If the aircraft is flying a vertical path (e.g., VNAV Path), then the deviation from that path should be displayed in the primary field of view (i.e., the PFD, ND, or other acceptable display).

b. Climb or Descent.

(1) Autothrust function. When VNAV is selected for climb or descent, the autothrust function (if installed) should maintain the appropriate thrust setting. When leveling after a VNAV climb or descent, the autothrust function should maintain the target speed.

(2) Preclude a VNAV climb. The FGS should preclude a VNAV climb, unless the Mode Selector Panel altitude window is set to an altitude above the current altitude.

(3) Preclude a VNAV descent. The FGS should preclude a VNAV descent, unless the Mode Selector Panel altitude window is set to an altitude below the current altitude, except when on a final approach to a runway.

(4) Preclude Mode Selector Panel Altitude Fly–through The FGS should not allow the VNAV climb or descent to pass through a Mode Selector Panel altitude, except when on a final approach to a runway.

Note: See Chapter 13, Part D, Section 6. Special Considerations for VNAV Approach Operations related to selecting a Target Altitude.

13. CHARACTERISTICS OF SPECIFIC MODES

D. Multi-Axis Modes

1. GENERAL. This section discusses modes that are implemented in many flight guidance systems that are used in an integrated manner for pitch, lateral/ directional control, and thrust management of the airplane. The criteria identified reflect operational experience gained from the use of these modes.

2. TAKEOFF MODE

a. Vertical Guidance. In the take off mode, the vertical element of the FGS should provide vertical guidance to acquire and maintain a safe climb out speed after initial rotation for takeoff. If no rotation guidance is provided, the pitch command bars may be displayed during takeoff roll but should not be considered as providing rotation guidance, unless it is part of the intended function.

b. Lateral Guidance. In the takeoff mode, the lateral element of the FGS, if implemented, should maintain runway heading/ track or wings level after liftoff. A separate lateral mode annunciation should be provided.

c. Rotation Guidance. If rotation guidance is provided, consideration should be given to the need to show that the use of the guidance does not result in a tail strike. It should be consistent with takeoff methods necessary to meet takeoff performance requirements up to 35 feet AGL.

d. Autothrust. The autothrust function should increase and maintain engine thrust to the selected thrust limits (e.g., full T/O, de-rate).

e. Design. The FGS design should address all engine and engine-inoperative conditions consistent with the following takeoff system performance after liftoff:

(1) <u>System operation</u>. Takeoff system operation should be continuous and smooth through transition from the runway portion of the takeoff to the airborne portion and reconfiguration for en route climb. The pilot should be able to continue the use of the same primary display(s) for the airborne portion as for the runway portion. Changes in guidance modes and display formats should be automatic.

(2) Pitch attitude and climb speed / normal operation. The vertical axis guidance of the takeoff system during normal operation should result in the appropriate pitch attitude and climb speed for the airplane considering the following factors:

(a) Normal rate rotation of the airplane to the commanded pitch attitude at V_R - 10 knots for all engines and V_R - 5 knots for engine out should not result in a tail-strike.

(b) The system should provide commands that lead the airplane to smoothly acquire a pitch attitude that results in capture and tracking of the All–Engine Takeoff Climb Speed, V_2 + X. X is the All-Engine Speed Additive from the AFM (normally 10 knots or higher). If pitch limited conditions are encountered, a higher climb airspeed may be used to achieve the required takeoff path without exceeding the pitch limit.

(3) Pitch attitude and climb speed / engine–out operation. For engine-out operation, the system should provide commands that lead the airplane to smoothly acquire a pitch attitude that results in capture and tracking of the following reference speeds:

(a) V_2, for engine failure at or below V_2. This speed should be attained by the time the airplane has reached 35 feet altitude.

(b) Airspeed at engine failure for failures between V_2 and V_2 + X.

(c) V_2 + X, for failures at or above V_2 + X. Alternatively, the airspeed at engine failure may be used, provided it has been shown that the minimum takeoff climb gradient can still be achieved at that speed.

3. GO-AROUND MODE

a. Characteristics. Characteristics of the go–around mode and resulting flight path should be consistent with manually flown go-around.

b. Vertical Elements. The vertical element of the FGS go–around mode should initially rotate the airplane or provide guidance to rotate the airplane to arrest the rate of descent. The autothrust function, if installed, should increase thrust and either maintain thrust to specific thrust limits or maintain thrust for an adequate, safe climb.

c. Speed. The FGS should acquire and maintain a safe speed during climbout and airplane configuration changes. Typically, a safe speed for go-around climb is V_2, but a different speed may be found safe for windshear

recoveries (see AC 25-12). The lateral element of the FGS should maintain heading/ track or wings level.

d. Autothrust. The autothrust function should not exceed thrust limits (e.g., full go–around thrust or de–rated go–around thrust limits). Furthermore, the autothrust function should not reduce thrust for wind below the minimum value required for an adequate, safe climb or reduce the thrust lever position below a point that would cause a warning system to activate. The initial go–around maneuver may require a significant change in pitch attitude. It is acceptable to reduce thrust to lower the pitch attitude for comfort of the occupants when a safe climb gradient has been established. It should be possible for the pilot to re-select the full thrust value, if needed.

e. Engagement. The go-around mode should engage, even if the Mode Select Panel (MSP) selected altitude is at or below the go–around initiation point. The airplane should climb until another vertical mode is selected or the MSP altitude is adjusted to an altitude above the present aircraft altitude.

f. Design. The FGS design should address all engine and engine–out operation. The design should consider an engine failure resulting in a go-around and the engine failure occurring during an all engine go-around.

4. APPROACH MODE

a. Final Approach Path. In the Approach mode, the FGS should capture and track a final approach lateral and vertical path, if applicable, from a navigation or landing system, e.g., ILS, MLS, GLS, RNP RNAV. (See AC 120-28D and AC 120-29A).

b. Mode Annunciations. The FGS should annunciate all operationally relevant approach mode annunciations. Modes that are armed and waiting for capture criteria to be satisfied should be indicated in addition to the active pre-capture mode. A positive indication of the capture of the previously armed mode should be provided.

c. Sub–modes. The FGS may have sub–modes that become active without additional crew selection. An assessment of the significance of these sub-mode transitions to the flightcrew should be made. If assessed to be significant (e.g., Flare), positive annunciation of the transition should be provided.

d. Mode Engagement Sequence. Glideslope capture mode engagement may occur prior to localizer capture. However, it is the flightcrew's responsibility to ensure proper safe obstacle/ terrain clearance when following vertical guidance when the airplane is not established on the final lateral path.

e. Additional Guidance. Additional guidance and criteria are contained in AC 120-29A and AC 120-28D.

5. AUTOTHRUST MODES

a. General. This section discusses modes that are implemented in many flight guidance systems that are used primarily for controlling the engines on the airplane. The criteria identified reflect operational experience gained from the use of these modes.

b. Thrust Mode. In the Thrust mode, the FGS should command the autothrust function to achieve a selected target thrust value.

c. Speed Mode. In the Speed mode, the FGS should command the autothrust function to acquire and maintain the selected target speed value, assuming that the selected speed is within the speed range of the normal flight envelope. The autothrust system may fly a higher airspeed than the selected target speed during takeoff or during approach when operating in winds or turbulent conditions.

d. Retard Mode. If such a mode is installed on a specific aircraft, it should work in the same manner for both automatic and manual landings when the autothrust function is engaged.

6. SPECIAL CONSIDERATIONS FOR VNAV APPROACH OPERATIONS RELATED TO SELECTING A TARGET ALTITUDE

a. Approach. The FGS vertical modes should allow the pilot to set the target altitude to a missed approach value prior to capturing the final approach segment. This should be possible for capturing from both above and below the final approach segment

b. VNAV Path. It should be possible to define a descent path to the final approach fix and another path from the final approach fix to the runway with the target altitude set for the missed approach altitude. Appropriate targets and descent points should be identified by the FMS.

7. CONTROL WHEEL STEERING (CONTROL STEERING THROUGH THE AUTOPILOT)

a. Terminology. The term "Control Wheel Steering" is currently used by industry to refer to several different types of systems. This section is meant to apply only to those systems that are implemented as described in paragraphs (b) and (c) below. For comparison, several other systems that are similar in nature to Control Wheel Steering (CWS) but functionally very different from it are described in paragraph (d). This section does not apply to those systems.

b. General. CWS is considered to be an autopilot mode, as it is a specific function of the FGS. However, during CWS operation, the pilot is in control of the aircraft, rather than the autopilot. Operationally, CWS is identical to the pilot flying the airplane during manual flight. In both cases, the pilot is in actual control of the flight path and speed of the airplane. The only difference is the mechanization of how the actual flight control surfaces are moved. No "automatic" FGS commands are involved during CWS operation. Therefore, sections in this Advisory Circular, such as those which discuss Speed Protection and performance objectives, should be applied only to those autopilot modes with which the FGS is in control of the flight path of the airplane and should not be applied to CWS.

c. Requirements. If provided, a CWS mode should meet the following requirements:

(1) Control forces. It should be possible for the pilot to maneuver the airplane using the normal flight controls with the CWS mode engaged and to achieve the maximum available control surface deflection without using forces so high that the controllability requirements of § 25.143(c) are not met. Excessive discontinuities in control force which might adversely affect the flight path should not be encountered.

(2) Bank and pitch attitudes. The maximum bank and pitch attitudes that can be achieved without overpowering the automatic pilot should be limited to those necessary for the normal operation of the airplane.

> NOTE: Typically 35 degrees in roll and +20 degrees to -10 degrees in pitch.

(3) Control behavior. It should be possible to perform all normal maneuvers smoothly and accurately without nuisance oscillation. It should also be possible to counter all normal changes of trim due to change of

configuration or power, within the range of flight conditions in which control wheel steering may be used.

(4) Stall and stall recovery. The stall and stall recovery characteristics of the airplane should remain acceptable. It should be assumed that recovery is made with CWS in use, unless automatic disengagement of the automatic pilot is provided.

(5) Adjustments to trim. In showing compliance with § 25.143(f), account should be taken of such adjustments to trim as may be carried out by the automatic pilot in the course of maneuvers that can reasonably be expected. Some alleviation may be acceptable in the case of unusually prolonged maneuvers, provided that the reduced control forces would not be hazardous.

(6) Takeoff and landing. If the use of this mode for takeoff and landing is to be permitted, it should be shown that:

(a) Sufficient control, both in amplitude and rate, is available without encountering force discontinuities;

(b) Reasonable mishandling is not hazardous (e.g., engaging the automatic pilot while the elevators or ailerons are held in an out-of-trim position);

(c) Runaway rates and control forces are such that the pilot can readily overpower the automatic pilot with no significant deviation in flight path; and

(d) Any lag in aircraft response induced by the CWS mode is acceptable for the intended maneuver.

(7) Reversion to CWS mode. It should not be possible to revert to the CWS mode by applying an input to the control column or wheel, unless the autopilot is in a capture mode (e.g., altitude capture or localizer capture). When the force is released, the autopilot should return to the previously engaged capture mode or to the track mode.

d. Systems Similar to CWS but Functionally Different. The descriptions in paragraphs (d)(1) and (d)(2) below are intended to be generic. Implementation may vary from airplane to airplane.

(1) Touch Control Steering. A Touch Control Steering (TCS) system is available on many business and commuter aircraft. With a TCS system, a

pilot is able to physically disengage the autopilot servos from the flight control system, usually by pushing and holding a button on the control wheel, without causing the autopilot system itself to disengage or lose its currently selected modes. The pilot may then maneuver the airplane as desired using the aircraft's flight control system (i.e., the autopilot servos are not part of the control loop). The pilot is then able to reconnect the autopilot servos to the flight control system by releasing the TCS button. Using the new orientation of the aircraft as a basis, the autopilot will then reassume control of the airplane using the same mode selections as were present before the selection of TCS. This type of system on some aircraft is also sometimes referred to as Control Wheel Steering.

(2) Supervisory Override. A function available on some aircraft is referred to as a "supervisory override" of an engaged autopilot. With this function, a pilot is able to physically overpower an engaged autopilot servo by applying force to the flight deck controls. With a supervisory override, the autopilot does not automatically disengage due to the pilot input. This allows the pilot to position the airplane as desired using the flight deck controls without first disengaging the autopilot. When the pilot releases the controls, the autopilot reassumes control of the airplane using the same mode selections as were present before the supervisory override.

8. SPECIAL CONSIDERATIONS FOR THE INTEGRATION OF FLY-BY-WIRE FLIGHT CONTROL SYSTEMS AND FGS

a. Speed Protection. Speed protection features may be implemented in the fly-by-wire flight control system. However, if speed protection is also implemented within the FGS, it should be compatible with the envelope protection features of the fly–by–wire flight control system. The FGS speed protection (normal flight envelope) should operate to or within the limits of the flight control system (limit flight envelope).

b. System Degradation. Information should be provided to the flightcrew about the impact on the FGS following degradation of the fly-by-wire flight control systems.

14. FGS INTEGRATION

A: General

Throughout the preceding sections of the document, flight guidance systems and functions have been considered as being separate and distinct from other systems and functions on the aircraft. It is recognized that in complex aircraft designs, the flight guidance functions are closely integrated with other avionics functions and that the physical integration of these systems may have a bearing on how airplane level safety is assessed. The following paragraphs provide guidance on the likely FGS system integration issues found in more complex aircraft system designs and the interfaces that should be considered within the bounds of demonstrating the intended function, performance, and safety of the FGS.

B: System Integration Issues

1. INTEGRATION WITH OTHER SYSTEMS. Integration of other aircraft systems with the FGS has the potential of reducing the independence of failure effects and partitioning between functions. This is particularly the case where hardware and software resources are shared by different systems and functions (e.g., aircraft data highway and Integrated Modular Avionics (IMA) architectures). In addition to considering the reliability and integrity aspects of the FGS as a separate system, it may be necessary to address the effects of FGS failures with respect to fault propagation, detection, and isolation within other systems. The overall effect on the aircraft of a combination of individual system failure conditions occurring as a result of a common or cascade failure, may be more severe than the individual system effect. For example, failure conditions classified under § 25.1309 as Minor or Major by themselves may have Hazardous effects at the aircraft level when considered in combination. With regard to isolation of failures and particularly combination of failures, the ability of the alerting system to provide clear and unambiguous information to the flightcrew becomes of significant importance. (See also Chapter 15, Safety Assessment.)

2. RISK OF ERROR. Complex and highly integrated avionics systems present greater risk for development error. With non-traditional human-machine interfaces, there is also the potential for operational flightcrew errors. Moreover, integration of systems may result in a greater likelihood of undesirable and unintended effects.

3. SYSTEM SAFETY ANALYSIS. Within the FGS, where credit is taken for shared resources or partitioning schemes, these should be justified and documented within the System Safety Analysis. When considering the functional failures of the system, where such partitioning schemes can not be shown to provide the necessary isolation, possible combination failure modes should be taken into account. An example of this type of failure would be multi–axis active failures, where the control algorithms for more than one axis are hosted on a single processing element. Further, the functional integration of control functions such as control surface trimming, yaw channel, and stability augmentation, while not strictly FGS, should be considered.

14. FGS INTEGRATION

C: Functional Interfaces

1. SENSORS. In its simplest form, the FGS may be considered as interfacing with sensors that provide the necessary inputs to enable computation of its various functions. Typically, these sensors will include air and inertial data, engine control, and navigation sensors, such as ILS, VOR, and DME. In the case of engine control, a feedback loop may also be provided. The FGS may also be considered as providing inner loop closure to outer loop commands. The most common interface is with the FMS, which provides targets for lateral and vertical navigation in the form of steering orders.

2. POTENTIAL INCONSISTENCIES. In demonstrating the intended function and performance of both the FGS and systems providing outer loop commands, the applicant needs to address potential inconsistencies between limits of the two. One example of this is possible conflicts between FMS steering commands with basic FGS pitch and bank angle limits. Failure to address these points can result in discontinuities, mode switching, and reversions, leading to erroneous navigation and other possible safety issues (e.g., buffet margin at high altitude). Similar issues arise in the inner loop, across the functional interface between FGS and flight controls. In fly–by–wire aircraft, the loss of synchronization between the two can result in mode anomalies and autopilot disengagement.

3. FUNCTION AND PERFORMANCE. The applicant should demonstrate the intended function and performance of the FGS across all possible functional interfaces. The alerting system should also be assessed to ensure that accurate and adequate information is provided to the flightcrew when dealing with failures across functional interfaces.

15. SAFETY ASSESSMENT

A: General

1. BASIC SAFETY REQUIREMENTS. Section 25.1309 defines the basic safety requirements for airworthiness approval of airplane systems and AC 25.1309 provides an acceptable means of demonstrating compliance with this rule. This section provides additional guidance and interpretive material for the application of § 25.1309 to the approval of FGS.

2. SAFETY ANALYSIS. A Safety Analysis should be performed to identify the Failure Conditions, classify their hazard level according to the guidance of AC 25.1309, and establish that the Failure Conditions occur with a probability corresponding to the hazard classification or are mitigated as intended. The safety assessment should include the rationale and coverage of the FGS protection and monitoring philosophies employed. The safety assessment should include an appropriate evaluation of each of the identified FGS Failure Conditions and an analysis of the exposure to common mode/ cause or cascade failure in accordance with AC 25.1309. Additionally, the safety assessment should include justification and description of any functional partitioning schemes employed to reduce the effect/ likelihood of failures of integrated components or functions.

3. VALIDATION OF ANALYSIS. There may be situations where the severity of the effect of a failure condition identified in the safety analysis needs to be validated. Laboratory, simulator, or flight test may accomplish the validation of the analysis. The test facility for each validation test should be chosen based on specific criteria, such as the difficulty of setting up the test conditions, potential hazard to an airplane and the test crew, and the validity of that validation test in that specific facility.

4. COORDINATION WITH REGULATORY AUTHORITY. It is recommended that the Safety Analysis plan and the Functional Hazard Assessment be coordinated with the regulatory authority early in the certification program.

15. SAFETY ASSESSMENT
B: FGS Failure Conditions

1. GENERAL. One of the initial steps in establishing compliance with § 25.1309 for a system is to identify the Failure Conditions that are associated with that system. The Failure Conditions are typically characterized by an undesired change in the intended function of the system. The Failure Condition statements should identify the functionality affected and the effect on the airplane and/or its occupants; specify any considerations relating to phase of flight; and identify any flightcrew action or other means of mitigation that are relevant.

2. FUNCTIONALITY. The primary functions of a FGS may include the following:

a. Control of Flight Path. Automatic control of the airplane's flight path utilizing the airplane's aerodynamic control surfaces,

b. Guidance. Guidance provided to the flightcrew to achieve a particular desired flight path or maneuver via information presented on a head–down or head–up display system, and

c. Thrust Control. Control of the thrust applied to the airplane.

3. EFFECT OF FAILURE CONDITION. Dependent upon the functionality provided in a specific FGS, the failure conditions could potentially impact the following:

a. Control of the Airplane in the Pitch, Roll and Directional Axes

b. Control of Thrust

c. Integrity and Availability of Guidance Provided to the Flightcrew

d. Structural Integrity of the Airplane

e. Ability of the Flightcrew to Cope with Adverse Operating conditions

f. Flightcrew's Performance and Workload

g. Safety of the Occupants of the Airplane

NOTE: The safety assessment of a FGS for use in supporting takeoff, approach and landing operations in low visibility conditions is further addressed in AC 120-29A and AC 120-28D.

15. SAFETY ASSESSMENT

C: Type And Severity Of Failure Conditions

1. TYPES OF FAILURE CONDITIONS. The type of the FGS Failure Conditions will depend, to a large extent, upon the architecture, design philosophy, and implementation of the system. Types of Failure Conditions can include the following:

a. Loss of Function. A control or display element no longer provides control or guidance.

b. Malfunction. A control or display element performs in an inappropriate manner, including the following sub-types:

(1) Hardover. The control or display goes to full displacement in a brief period of time. The resultant effect on the flight path and occupants of the airplane and possible adverse structural effects are the primary concerns.

(2) Slowover. The control or display moves away from the correct control or display value over a relatively long period of time. The potential delay in recognizing the situation and the effect on the flight path are the primary concerns.

(3) Oscillatory. The control or display is replaced or augmented by an oscillatory element. In addition to difficulty controlling the aircraft flight path, there may be effects on structural integrity and occupant well being.

2. CAUSE. Failure Conditions can become apparent due to failures in sensors, primary FGS elements (e.g., autopilot, flight director, HUD); control and display elements (e.g., servos, primary flight displays; interfacing systems; or basic services (e.g., electrical and hydraulic power).

3. SEVERITY. The severity of the FGS Failure Conditions and their associated classifications will frequently depend on the phase of flight, airplane configuration, and the type of operation being conducted. The effect of any control system variability (e.g., tolerances and rigging) on Failure Condition should be considered. The severity of the Failure Conditions can also be mitigated by various design strategies (see Chapter 15, Part D).

4. ASSESSMENT.

a. Functional Failures. Appendix C presents some considerations for use when assessing the type and severity of condition that results from functional failures. The classifications of Failure Conditions that have been identified on previous airplane certification programs are identified. The classifications of Failure Conditions should be agreed with the authority during the § 25.1309 safety assessment process.

b. Airframe Loads. With the exception of the catastrophic failure condition, the classification of failure conditions leading to the imposition of airframe loads should be assessed in accordance with Part 25, Subpart C, and § 25.1309. The assessment needs to take into account loads occurring during the active malfunction, recovery, or continuation of the flight with the system in the failed state.

c. Assessing Total Effect of Failure. Complex integrated systems may require that the total effect resulting from single failure be assessed. For example, some failures may result in a number of Failure Conditions which, if assessed individually may be considered Major effects but when considered in combination may be Hazardous. Special consideration concerning complex integration of systems can be found in Chapter 14, Part B, System Integration Issues.

15. SAFETY ASSESSMENT
D: Mitigation Of Failure Conditions

1. GENERAL. The propagation of potential Failure Conditions to their full effect may be nullified or mitigated by a number of methods. These methods could include, but are not limited to, the following:

a. Failure Detection and Monitoring.

b. Fault Isolation and Reconfiguration.

c. Redundancy.

d. Authority Limiting.

e. Flightcrew Action to Intervene.

2. Identification of Methods. Means to assure continued performance of any system design mitigation methods should be identified. The mitigation methods should be described in the Safety Analysis/Assessment document or be available by reference to another document (e.g., a System Description document).

3. Design. The design of typical FGS allows for the de–selection of control and guidance elements. The long–term effects on occupants and any structural implication of oscillatory failures can be mitigated by de-selection.

15. SAFETY ASSESSMENT

E. Validation Of Failure Conditions

1. GENERAL. The method of validation of Failure Conditions will depend on the effect of the condition, assumptions made, and any associated risk. The severity of some Failure Conditions may be obvious, and other conditions may be somewhat subjective. If flightcrew action is used to mitigate the propagation of the effect of a Failure Condition, the information available to the flightcrew to initiate appropriate action (e.g., motion, alerts, and displays) and the assumed flightcrew response should be identified. It is recommended that there be early coordination with the regulatory authority to identify any program necessary to validate any of these assumptions.

2. VALIDATION OPTIONS. The validation options for Failure Conditions include the following:

a. Analysis.

b. Laboratory Testing.

c. Simulation.

d. Flight Test.

3. GUIDANCE. The validation testing and analysis should take account of architectural strategies (e.g., redundant channels, high integrity components, rate limit/magnitude limiting, etc.). It may be necessary to substantiate the severity of a Failure Condition effect by ground simulation or flight test. This is particularly true where pilot recognition of the failure condition requires justification or if there is some variability in the response of the airplane. Failure Conditions that are projected to be less probable than 10^{-7} per flight hour, independent of effect severity, need not be demonstrated with a flight test.

Guidance on the assessment of traditional Failure Conditions is provided in Chapter 16, Compliance Demonstration using Flight Test and Simulation. New and novel functionality may require additional assessment methods to be agreed to with the authority.

15. SAFETY ASSESSMENT

F. Specific Considerations

The following paragraphs identify specific considerations that should be given to potential Failure Conditions for various phases of flight.

1. FGS FUNCTION DURING GROUND OPERATIONS. The potential hazard that may result due to inappropriate autopilot, autothrust, or other system control action during maintenance operations should be assessed. This includes while the airplane is parked at the gate and during taxi operations. System interlocks or crew or maintenance procedures and placards may mitigate these hazards.

2. FGS OPERATIONS IN CLOSE PROXIMITY TO THE GROUND. The response of the airplane to failures in an automatic flight control system could have implications for the safety of operations when the airplane is close to the ground. For the purpose of this advisory circular, close to the ground can be assumed to be less than 500 feet above the liftoff point or touchdown zone or a runway. A specific safety assessment is required if approval is sought for automatic flight control operation where the autopilot is engaged or remains engaged in close proximity to the ground.

> NOTE: Operation in low visibility conditions requires additional consideration. AC 120-29A and AC 120-28D should be used to determine those additional considerations.

a. Takeoff.

(1) General.

(a) If approval is sought for engagement of the autopilot below 500 feet after liftoff, an assessment of the effect of any significant FGS failure conditions on the net vertical flight path, the speed control and the bank angle of the airplane should be conducted. An Autopilot Minimum Engage Altitude after Takeoff will be established based, in part, on the characteristics of the airplane in response to the failures and the acceptability of flightcrew recognition of the condition.

(b) A pilot assessment of certain Failure Conditions may be required (see Chapter 16, Compliance Demonstration using Flight Test and Simulation). The minimum engagement altitude/height after takeoff based upon the assessment should be provided in the AFM.

(2) Vertical Axis Assessment.

(a) The operational objective during the initial climb is to maintain an appropriate climb profile to assure obstacle clearance and to maintain an appropriate speed profile during climbout (See Chapter 13, Characteristics of Specific Modes).

(b) FGS Failure Conditions should be assessed for the potential for a significant reduction in the net takeoff flight path below 500 feet and a significant increase in pitch attitude that results in the airplane speed dropping to unacceptable values.

(c) For Failure Conditions that are likely to occur more often than 1×10^{-7} per flight hour and would have Hazardous or Catastrophic effects without pilot intervention, the ability of pilots to adequately perform the intervention should be evaluated and documented in AFM limitations or procedures, if those failure conditions require operational limitations or flight crew procedures.

(3) Lateral Axis Assessment

(a) The operational objective during the initial climb is to maintain an appropriate heading or track to provide separation from potential adjacent runway operations.

(b) FGS failure conditions should be assessed for the potential for producing a bank angle that results in significant deviation from the runway track or intended track.

(c) For Failure Conditions that are likely to occur more often than 1×10^{-7} per flight hour and would have Hazardous or Catastrophic effects without pilot intervention, the ability of pilots to adequately perform the intervention should be evaluated and, as necessary, documented in AFM limitations or procedures.

b. Approach

(1) Assessment of Failure Conditions. If the autopilot is to remain engaged below 500 feet above the touchdown zone during approach, an assessment of the effect of any significant FGS failure conditions on the net vertical flight path, the speed control, and the bank angle of the airplane should be conducted. The lowest point on the approach appropriate for the use of the autopilot will be established based on the characteristics of the

airplane in response to the failure conditions and the acceptability of flightcrew recognition of the condition. See Chapter 16, Compliance Demonstration using Flight Test and Simulation for details regarding how these failure conditions on approach should be assessed.

(2) Operations.

(a) A number of approach operations may be conducted using automatic flight control. These can include, but are not limited to, the following:

(1) ILS, MLS, and GLS

(2) RNAV (e.g., LNAV and VNAV)

(3) NAV (e.g., VOR, LOC, and Backcourse)

(4) Open loop flight path management (e.g., Vertical Speed, Flight Path Angle, Track or Heading Select).

(b) Some operations may be conducted with a single autopilot channel engaged, and some operations may be conducted with multiple autopilots engaged. The engagement of multiple autopilots may have the effect of mitigating the effect of certain failure conditions. The effectiveness of these mitigation methods should be established.

(c) The type of operation and the prevailing visibility conditions will determine the decision altitude/ decision height (DA(H)) or minimum descent altitude or height (MDA(H)) for a particular flight operation. The operation may continue using automatic flight control if the visual requirements are met.

(d) The lowest altitude at which the autopilot should remain engaged could vary with the type of operation being conducted. The resultant flight path deviation from any significant failure condition would impact the autopilot minimum operational use height (MUH). The minimum use height for approach should be provided in the AFM.

(3) Vertical Axis Assessment

(a) The operational objective during the approach is to maintain an appropriate descent profile to assure obstacle clearance and to maintain an appropriate speed profile.

(b) FGS Failure Conditions should be assessed for the potential for a significant reduction in the approach flight path when below 500 feet above touchdown and for a significant increase in pitch attitude that results in the airplane speed dropping to unacceptable values.

(c) For Failure Conditions that are likely to occur more often than 1×10^{-7} per flight hour and would have Hazardous or Catastrophic effects without pilot intervention, the ability of pilots to adequately perform the intervention should be evaluated and documented in AFM limitations or procedures, if those failure conditions require operational limitations or flight crew procedures.

(4) Lateral Axis Assessment

(a) The operational objective during the approach is to maintain an appropriate track to provide alignment with the runway centerline or intended flight path to support the landing.

(b) FGS Failure Conditions should be assessed for the potential for producing a bank angle that results in significant deviation from the runway track or intended track.

(c) For Failure Conditions that are likely to occur more often than 1×10^{-7} per flight hour and would have Hazardous or Catastrophic effects without pilot intervention, the ability of pilots to adequately perform the intervention should be evaluated and, as necessary, documented in AFM limitations or procedures.

3. CRUISE OPERATIONS. The primary concerns during cruise operations are adverse effects that the airplane response to Failure Conditions may have on the structure of the airplane and to the occupants. At a minimum, the accelerations and attitude resulting from any condition should be assessed. The mitigation of the effect of a Failure Condition by the flightcrew may not be as immediate as during takeoff and landing operations. Chapter 16 provides guidance and considerations for this phase of flight.

4. ASYMMETRIC THRUST DURING AUTOTHRUST OPERATION.

During autothrust operation, it is possible that a failure (e.g., engine failure, throttle lever jam, or thrust control cable jam) could result in a significant asymmetric thrust failure condition that may be aggravated by the continued use of the autothrust system. Because the FGS could potentially compensate for the asymmetric condition with roll (and possibly yaw) control, the pilot may not immediately be aware of the developing situation. Therefore, an alert should be considered as a means of mitigation to draw the pilot's attention to an asymmetric thrust condition during FGS operation.

15. SAFETY ASSESSMENT

G. Failure to Disengage the FGS

The requirement for quick disengagement for the autopilot and autothrust functions is intended to provide a routine and intuitive means for the flightcrew to quickly disengage those functions. The implication of failures that preclude the quick disengagement from functioning should be assessed consistent with the guidelines of AC 25.1309. This assessment should consider the effects of failure to disengage the autopilot and/or autothrust functions during the approach using the quick disengagement controls. The feasibility of the use of the alternative means of disengagement defined in Chapter 10, Part A, Section 2. d. should be assessed. If the assessment indicates the aircraft can be landed manually with the autopilot and/or autothrust engaged, this should be demonstrated in Flight Test.

16. COMPLIANCE DEMONSTRATION USING FLIGHT TEST AND SIMULATION

A. General

1. METHODS OF COMPLIANCE DEMONSTRATION. Validation of the performance and integrity of FGS operation will typically be accomplished by a combination of analysis, laboratory test, simulation, and flight test. This section focuses on compliance demonstration by flight test or simulation with flightcrew participation. The section includes the evaluation necessary to confirm acceptable performance of intended functions, including the human-machine interface and the acceptability of failure scenarios. The particular requirements for flight or simulator evaluation will consider the specifics of the applicant's design, the supporting engineering analysis, and the scope and depth of the applicant's laboratory testing.

2. CRITERIA FOR ESTABLISHING COMPLIANCE. The criteria to be used for establishing compliance with §§ 25.1301, 25.1309 and 25.1329 may be found in Chapters 10 through 15 of this document. The type and extent of the various validation methods may vary, depending upon the FGS functionality, certification considerations, the applicant's facilities, and other practical and economic constraints.

3. ELEMENTS OF CERTIFICATION FLIGHT TEST. The certification flight test program should investigate representative phases of flight and aircraft configurations used by the FGS. The program should evaluate all of the FGS modes through appropriate maneuvers and representative environmental conditions, including turbulence. Combinations of FGS elements (e.g., autopilot engaged and autothrust disengaged) should be considered. Certain failure scenarios may require flight or simulator demonstration. The airplane should contain sufficient instrumentation to record the parameters appropriate to the test. Examples of parameters that could be recorded include normal acceleration, airspeed, height, pitch and roll angles, and autopilot engagement state. The flight test instrumentation should not affect the behavior of the autopilot or any other system.

4. PILOT–IN–THE–LOOP EVALUATION. An important part of the pilot-in-the-loop evaluation is validation of human factors. A thorough evaluation of the human–machine interface is required to ensure safe, effective, and consistent FGS operation. Portions of this evaluation will be conducted during flight test. Representative simulators can be used to accomplish the evaluation of human factors and workload studies. The level and fidelity of the simulator used should be commensurate with the

certification credit being sought, and its use should be agreed upon with the regulatory authority.

5. CONSIDERATIONS WHEN FGS INCLUDES TAKEOFF AND/ OR APPROACH MODES.

a. Criteria to Consider. The following criteria should be considered for applicability in developing the overall and integrated flight test and simulation requirements:

(1) Advisory Circular 120-29A, "Criteria for Approving Category I and II Landing Minima for FAR 121 Operators"

(2) Advisory Circular 120-28D, "Criteria for Approval of Category III Landing Weather Minima" need to be included in the requirements to be tested.

b. Procedures to Show Compliance. Procedures that may be used to show compliance are provided in AC 25-7A, Flight Test Guide For Certification of Transport Category Airplanes (Section 181, Automatic Pilot System).

6. RELATION OF CHAPTER 16 TO REST OF THIS AC. This relationship is depicted in Figure 16-1.

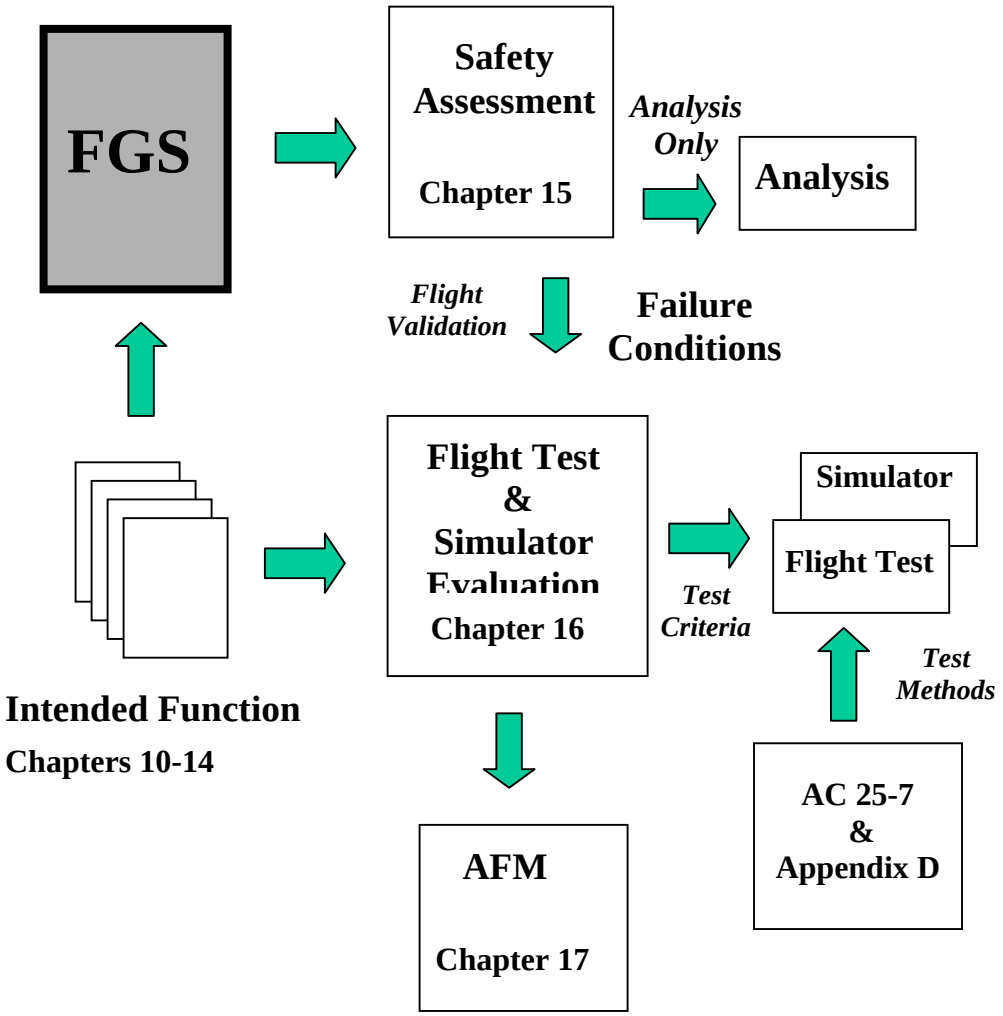

Figure 16-1

Relationship Between Chapter 16 And Other AC Chapters

16. COMPLIANCE DEMONSTRATION USING FLIGHT TEST AND SIMULATION

B. Performance Demonstration (Fault Free): § 25.1301

1. GENERAL

a. Certification Plan. The Certification Plan should identify the specific functionality provided by the FGS. The flight test and/or simulator program will typically assess this functionality under representative operational conditions, including applicable airplane configurations and a representative range of airplane weight, center of gravity and operational envelope.

b. Evaluating Performance. The performance of the FGS system in each of its guidance and control modes should be evaluated. The acceptability of the performance of the FGS may be based on test pilot assessment, taking into account the experience acquired from similar equipment capabilities and the general behavior of the airplane. The level of acceptable performance may vary according to airplane type and model. The FGS should be evaluated for its low and high maneuvering capability. AC 25-7A, Flight Test Guide may provide additional information on FGS test procedures.

c. Evaluating Compatibility of Mode Controls, Indications, and Alerts. The acceptability of mode controls and annunciations, any associated alerts, and general compatibility with cockpit displays should be evaluated. The FGS should be free from unexpected disengagement, and no confusion should result from FGS mode changes. Additional considerations relating to the assessment of Human Factors is provided in Chapter 16, Part F.

2. NORMAL PERFORMANCE

a. Demonstration. Normal performance is considered to be performance during operations well within the airplane's flight envelope and with routine atmospheric and environmental conditions. Normal performance should be demonstrated over a range of conditions that represent typical conditions experienced in operational use.

b. Evaluation. The FGS should be evaluated to determine the acceptability of the following characteristics:

(1) Stability and tracking of automatic control elements,

(2) Controllability and tracking of guidance elements,

(3) Acquisition of flight paths for capture modes, and

(4) Consistency of integration of modes (Section 14).

c. Expected Errors. Performance should be assessed in the presence of errors that can reasonably be expected in operation (e.g., incorrect selection of approach speed).

3. PERFORMANCE IN "OTHER THAN NORMAL" CONDITIONS

a. Definitions. Other Than Normal conditions are the combination of Rare Normal and Non-Normal conditions. Performance in Other Than Normal conditions is considered to be performance of the system under conditions that are experienced infrequently by the airplane during operational use. Examples of Rare Normal and Non-Normal conditions are given in Chapter 12, Sections C and E of this document.

b. Test Program. The test program should assess the FGS performance in more challenging environmental conditions (e.g., winds, wind gradients, and various levels of turbulence) as the opportunity presents itself. Rare environmental conditions may require the FGS to operate at the limits of its capabilities. The intent of the evaluation is to assess the performance of the FGS under more demanding conditions that may be experienced infrequently in-service. Due to the severity of some environmental conditions, such as severe and extreme turbulence or flights into microbursts, it is not recommended or required that the FGS flight evaluations include demonstration under those conditions. Those conditions are more appropriately addressed by simulator evaluation.

c. Evaluation of FGS. The FGS should be evaluated to determine the acceptability of the following characteristics:

(1) Stability of automatic control elements and ability to resume tracking following any upset.

(2) Controllability of guidance elements and ability to resume tracking following any upset.

(3) Acceptability of mode transitions and overall cockpit system integration.

d. Windshear. If the FGS provides windshear escape guidance, performance demonstration requirements should be conducted consistent with AC 25-12.

4. SPECIFIC PERFORMANCE CONDITIONS. The following paragraphs identify specific performance conditions requiring evaluation by flight test and/or simulation.

a. Icing

(1) General. FGS performance and safety in icing conditions should be demonstrated by flight test and/or simulation tests and be supported by analysis where necessary. The implications of continued use of the automatic flight control elements of the FGS in icing conditions should be assessed. Ice accumulation on the airplane wings and surfaces can progressively change the aerodynamic characteristics and stability of the airplane. Even though the FGS may perform safely under these conditions, its continued use may mask this change—which, in turn, can lead to pilot handling difficulties and potential loss of control—should the autopilot become disengaged (either automatically or manually).

(2) Test Program. A test program should assess the potential vulnerability of the FGS to icing conditions by evaluating autopilot performance during ice shape tests or during natural icing tests.

(a) Sufficient autopilot testing and analysis should be conducted to ensure that the autopilot's performance is acceptable. This testing and analysis should include evaluation of the low speed protection threshold in the event that stall warning parameters are adjusted to account for icing conditions. See Section 12 D, Icing Considerations in Normal and Rare Normal Conditions, paragraph c for more information.

(b) In general, it is not necessary to conduct an autopilot evaluation that encompasses all weights, center of gravity positions (including lateral asymmetry), altitudes, and deceleration device configurations. However, if the autopilot performance with ice accretion shows a significant difference from the non–contaminated airplane or testing indicates marginal performance, additional tests may be necessary.

(c) If significant autopilot inputs are required to compensate for the icing conditions, then the acceptability of the indication of a significant out of trim condition should be made, and the subsequent response of the airplane when the autopilot disengages (manual or automatic) should be

determined. (See Chapter 10, Part A, Section 2 and Chapter 11, Part D, Section 4.)

(3) De-icing. If the airplane is configured with a de-icing system, the autopilot should demonstrate satisfactory performance during the shedding of ice from the airplane.

(4) Limitations. Where degradation is noted which is not significant enough to require changes to the autopilot system or to de-icing or anti-icing systems, appropriate limitations and procedures should be established and presented in the AFM.

b. Low Speed Protection. The FGS should be assessed for the acceptability of the low speed protection performance under the following conditions:

(1) High Altitude Cruise with a simulated engine failure.

(2) Climb to Altitude Capture at Low Altitude with a simulated engine failure during capture.

(3) Vertical Speed with insufficient climb power.

(4) Approach with speed abuse.

c. High-Speed Protection. The FGS should be assessed for the acceptability of the high-speed protection performance under the following conditions:

(1) High altitude level flight with autothrust function.

(2) High altitude level flight without autothrust function.

(3) High altitude descending flight with autothrust function.

d. Go-Around

(1) Mode Assessment. The objective of the go–around mode (see Chapter 13, Part D, Section 3) is to quickly change the flight path of the airplane from approach to landing to a safe climbout trajectory. The mode has specific utility in low visibility conditions when operations are predicated on a decision altitude/height (DA/H), and a go–around is necessary if visual references are not acquired at the DA/H. Therefore, the assessment of the go-around mode may be conducted in conjunction with the evaluation of the

FGS to support low visibility operations, using additional criteria contained in AC 120-28 and AC 120-29.

(2) Flight Evaluation. The flight evaluation should be conducted to assess the rotation characteristics of the airplane and the performance of the airplane in acquiring and maintaining a safe flight path. The acceptability of the operation if contact is made with the runway during the missed approach or balked landing should be established.

(a). Factors to be considered. A demonstration program should be established that confirms acceptable operation when the following factors are considered:

(i) Airplane weight and CG.

(ii) Various landing configurations.

(iii) Use of manual thrust or autothrust.

(iv) Consequences of thrust de–rates with selection of Go-Around mode.

(v) An engine failure at the initiation of Go-Around.

(vi) An engine failure during Go–Around after Go–Around power is reached.

(vii) Initiation altitude (e.g., in ground effect or not during flare).

(b) Characteristics to be Evaluated:

(i) The pitch response of the airplane during the initial transition.

(ii) Speed performance during airplane reconfiguration and climbout.

(iii) Integrated autopilot and autothrust operation.

(iv) Transition to Missed Approach Altitude.

(v) Lateral performance during an engine failure.

(c) Initiation Heights. Where height loss during a go–around maneuver is significant or is required to support specific operational approval, demonstrated values for various initiation heights should be included in the AFM.

e. Steep Approach [Special Authorization]

(1) Flight Test/ Simulator Demonstration. Typical approach operations include glidepath angles between 2.77 and 3.75 degrees. Application for approval to conduct operations on glidepath angles of greater than 3.75 degrees requires additional evaluation. See AC 120-29A, section 4.3, Landing, for further discussion. For such an approval, the FGS flight test and simulator demonstration should include the following:

(a) Approach path capture, tracking, and speed control.

(b) Recovery of the system from abuse cases (e.g., glidepath angle and speed).

(c) Assessment of autopilot disengagement transient.

(d) Demonstration of go–around mode from a Steep Approach.

(2) Autopilot Use on Steep Approaches. For autopilot use at approach angles greater than 4.5 degrees, the criteria of AC 25-7A, Flight Test Guide for Certification of Transport Category Airplanes, Chapter 8, should be satisfied. This advisory material contains airworthiness and transition criteria for steep approaches. In addition, the criteria of AC 120-29A, Appendix 2 (Cat 1) "Criteria for Approving Category I and II Landing Minima for FAR 121 Operators," paragraph 6.8, should be assessed depending on the operational and low visibility requirements.

f. Indication of and Response to an Out Of Trim Condition. An assessment should be performed to determine the acceptability of the out of trim annunciation and subsequent response to disengagement. (See Chapter 11, Part D, Section 4.)

5. FLIGHT DIRECTOR / HUD

a. General

(1) Guidance Elements. The guidance aspect of an FGS may be provided by a head down Flight Director (F/D) or a Head Up Display (HUD). Head down displays normally utilize F/D guidance cues that provide steering

commands—such as a cross pointer or single "V"—for the pilot to follow. Head Up Displays normally display a flight path vector which represents the instantaneous flight path. The vector is based on the aircraft energy state and directional vectors. Various new display media are evolving (e.g., Enhanced Vision System and Simulated Vision System) that may integrate guidance elements with situational elements.

(2) Flight Test or Simulator Program. The flight test or simulator program should demonstrate that the F/D or HUD guidance elements provide smooth, accurate, and damped guidance in all applicable modes to achieve satisfactory control task performance without pilot compensation or excessive workload.

(3) Performance. The flight director guidance should provide adequate performance for operations under the conditions listed below. Some pilot compensation may be acceptable for these conditions:

(a) Stability augmentation off.

(b) Alternate fly-by-wire control modes (e.g., direct law), if any.

(c) An engine inoperative.

(4) Non–stationary Tracking Reference. Flight directors designed to work with a non-stationary tracking reference (such as a flight path angle or flight path vector which are commonly used with HUD guidance) should be evaluated in conditions which bring these guidance symbols to the field of view limits of the display. Crosswinds and certain combinations of airspeed, gross weight, center of gravity, and flap/slat/gear configurations might cause such conditions. At these limits the dynamics of the guidance response to pilot control inputs can differ with potentially adverse affects on tracking performance, pilot compensation, and workload.

(5) Primary Instrument References. It should also be demonstrated that movement of the flight director and its tracking reference do not interfere with primary instrument references throughout their range of motion. The pilot's ability to interpret the guidance and essential flight information should not be adversely affected by the movement dynamics or range of motion.

b. Specific Demonstrations for Head–Up Display

(1) Compliance. These demonstrations are intended to show compliance with the following paragraphs of this AC:

(a) Section 10. B.

(b) Section 11. B.

(c) Section 11. E.

(d) Section 12. B.

(2) Demonstrations Required. When the pilot flying is using the HUD, the HUD is where the pilot is looking for the basic flight information, and the pilot is less likely to be scanning the head down instruments. Therefore, the following should be demonstrated:

(a) The location and presentation of the HUD information (e.g., guidance, flight information, and alerts/annunciations) does not distract the pilot or obscure the pilot's outside view. For example, the pilot should be able to track the guidance to the runway without having the view of runway references or hazards along the flight path obscured by the HUD symbology.

(b) Pilot awareness of primary flight information, annunciations, and alerts is satisfactory when using any HUD display mode. Some display modes that are designed to minimize "clutter" could degrade pilot awareness of essential information. For example, a "digital–only" display mode may not provide sufficient speed and altitude awareness during high–speed descents.

(c) It should be demonstrated that the pilot can positively detect cases when conformal symbology is field of view limited.

(d) Approach mode guidance, if provided, should be satisfactory throughout the intended range of conditions, including at the minimum approach speed and maximum crosswind with expected gust components, for which approval is sought.

(e) Visual Cautions and Warnings associated with the flight guidance system can be immediately detected by the pilot flying while using the HUD.

(f) The pilot flying can immediately respond to windshear warnings, ground proximity warnings, TCAS warnings, and other warnings requiring immediate flight control action, such as a go–around, while using the HUD without having to revert to a head down flight display.

(3) Pilot Not Flying. In certain phases of flight, it is important from a flightcrew coordination standpoint that the pilot not flying be aware of problems with the HUD used by the pilot flying. Therefore, it should also be demonstrated that the pilot not flying can immediately be made aware of any visual Cautions and Warnings associated with the HUD for applicable phases of flight.

(4) Approach Mode. If approach mode guidance is provided, satisfactory performance should be demonstrated throughout the intended range of operating conditions for which approval is sought. For example, performance should be demonstrated at the minimum approach speed and maximum crosswind with expected gust components.

(5) Recovery Guidance. If recovery guidance is provided, it should be demonstrated that the pilot can immediately detect and recover from unusual attitudes when using the HUD. Specialized unusual attitude recovery symbology, if provided, should be shown to provide unequivocal indications of the attitude condition (e.g., sky/ ground, pitch, roll, and horizon) and to correctly guide the pilot to the nearest horizon. The stroke presentation of flight information on a HUD may not be as inherently intuitive for recognition and recovery as the conventional head down attitude display (e.g., contrasting color, area fill, shading vs. line strokes). The HUD display design needs to be able to compensate for these differences to provide adequate pilot recognition and recovery cues.

c. Simulator Demonstration for Head–Up Display (HUD). If a pilot-in-the-loop flight simulation is used for some demonstrations, then a high fidelity, engineering quality facility is typically required. The level of simulator may vary with the functionality being provided and the types of operation being conducted. Factors for validation of the simulation for demonstration purposes include the following:

(1) Guidance and control system interfaces.

(2) Motion base suitability.

(3) Adequacy of stability derivative estimates used.

(4) Adequacy of any simplification assumptions used for the equations of motion.

(5) Fidelity of flight controls and consequent simulated aircraft response to control inputs.

(6) Fidelity of the simulation of aircraft performance.

(7) Adequacy of flight deck instruments and displays.

(8) Adequacy of simulator and display transient response to disturbances or failures (e.g., engine failure, auto-feather, electrical bus switching).

(9) Visual reference availability, fidelity, and delays.

(10) Suitability of visibility restriction models, such as appropriate calibration of visual references for the tests to be performed for day, night, and dusk conditions.

(11) Fidelity of any other significant factor or limitation relevant to the validity of the simulation.

Adequate correlation of the simulator performance to flight test results should be made.

6. FLIGHTCREW OVERRIDE OF THE FLIGHT GUIDANCE SYSTEM.

a. General. A flight evaluation should be conducted to demonstrate compliance with Chapter 10, Part D. The flight evaluation should consider the implication of system configuration for various flight phases and operations.

b. Autopilot Override

(1) Assessing Effect. The effect of flightcrew override should be assessed by applying an input on the cockpit controller (for example, the control column or equivalent) to each axis for which the FGS is designed to disengage. The evaluation should be repeated with progressively increasing rate of force application to assess FGS behavior. This assessment should include the initial application of force on the cockpit controller as well as when the force is removed from the controllers. The effects of speed and altitude should be considered when conducting the evaluation.

(2) No Automatic Disengagement. If the autopilot is designed such that it does not automatically disengage due to a pilot override, verify that no potential hazards are generated due to the override per Chapter 10, Part D.

(3) Multiple Channel Engagement. If the design of the autopilot provides for multiple channel engagement for some phases of flight that results in a higher override force, these conditions should be evaluated.

NOTE: AC 120-28D, Appendix 3, Section 8 contains guidance for evaluating autopilot override for systems supporting low visibility operations.

c. Autothrust Override. The capability of the flightcrew to override the autothrust system should be conducted at various flight phases. The evaluation should include an override of the autothrust system with a single hand on the thrust levers while maintaining control of the airplane using the opposite hand on the control wheel (or equivalent). This action should not result in a potential hazard per Chapter 10, Part D, either during the override or after the pilot releases the thrust levers. If the autothrust system automatically disengages due to the override, the alerts that accompany the disengagement should be assessed to ensure flightcrew awareness.

d. Pitch Trim System Evaluation during Autopilot Override

(1) Effect of Override. The effect of flightcrew override during automatic control on the automatic trim systems should be conducted. The pilot should then apply an input to the pitch cockpit controller (i.e., control column or sidestick) below that which would cause the autopilot to disengage and verify that the automatic pitch trim system meets the intent in Chapter 10, Part D.

(2) No Automatic Disengagement. If the system design is such that the autopilot does not have an automatic disengagement on override feature, the pilot should initiate an intentional override for an extended period of time. The autopilot should then be disengaged with the Quick Disconnect Button and any transient response assessed in compliance with Chapter 10, Part D. The effectiveness and timeliness of any Alerts used to mitigate the effects of the override condition should be assessed during this evaluation.

16. COMPLIANCE DEMONSTRATION USING FLIGHT TEST AND SIMULATION

C. Failure Conditions Requiring Validation: § 25.1309

1. GENERAL.

a. Safety Assessment. The Safety Assessment process identified in Chapter 15 should identify any Failure Condition responses that would require pilot evaluation to assess the severity of the effect, the validity of any assumptions used for pilot recognition, and mitigation. The classification of a Failure Condition can vary according to flight condition and may need to be confirmed by simulator or flight test.

b. Evaluation Of Failure Conditions. This section provides guidance on the test criteria, including recognition considerations, for flight evaluation of these Failure Conditions. In addition, certain probable failures should be demonstrated to assess the performance of the FGS and the adequacy of any applicable flightcrew procedures. Appendix D–Flight Test Procedures provides guidance on test methods for particular types of Failure Condition that have been identified by the Safety Assessment.

2 VALIDATION ELEMENTS.

a. Assessment. The Safety Assessment described in Chapter 15 establishes the FGS Failure Condition for which appropriate testing should be undertaken. Assessment of Failure Conditions has the following elements:

(1) Failure Condition insertion

(2) Pilot recognition of the effects of the Failure Condition

(3) Pilot reaction time, that is, the time between pilot recognition of the Failure Condition and initiation of the recovery

(4) Pilot recovery

b. Failure Condition

(1) Autopilot. Failure conditions of the autopilot should be simulated such that overall response is representative of how that failure condition would affect the airplane and its systems. Failure conditions should include

multi–axis failures and automatic trim failures, if those failure conditions exist (given the architecture of a specific FGS) and are relevant to the Safety Assessment.

(2) Flight Director. Flight Director failure conditions should be validated, if those failure conditions are relevant to the Safety Assessment

(3) Most Critical Conditions. The flight conditions under which the failure condition is inserted should be the most critical. Examples of these flight conditions are center of gravity, weight, flap setting, altitude, speed, power, and thrust. If an autothrust system is installed, the tests should be performed with the autothrust system engaged or disengaged, whichever is the more adverse case.

c. Pilot Recognition

(1) General. The pilot may detect a Failure Condition through airplane motion cues or by cockpit flight instruments and alerts. The specific recognition cues will vary with flight condition, phase of flight, and crew duties.

(2) Hardover. The recognition point should be that at which a pilot operating in non–visual conditions may be expected to recognize the need to take action. Recognition of the effect of the failure may be through the behavior of the airplane (e.g., in the pitch axis by aircraft motion and associated normal acceleration cues and in the roll axis by excessive bank angle) or an appropriate alerting system. Control column or wheel movements alone should not be used for recognition. The recognition time should not normally be less than 1 second. If a recognition time of less than 1 second is asserted, specific justification will be required. For example, additional tests may be required to ensure that the recognition time is representative in light of the cues available to the pilot.

(3) Slowover. This type of Failure Conditions is typically recognized by a path deviation indicated on primary flight instruments (e.g., CDI, altimeter, or vertical speed indicator). It is important that the recognition criteria are agreed upon with the regulatory authority. The following identify examples of recognition criteria as a function of flight phase:

(a) En–route cruise. Recognition through the Altitude Alerting system can be assumed for vertical path deviation. The lateral motion of the airplane may go unrecognized for a significant period of time, unless a bank angle alerting system is installed.

(b) Climb and Descent. Recognition through increasing/ decreasing vertical speed and/or pitch or roll attitude or heading can be assumed.

(c) On an approach with vertical path reference. A displacement recognition threshold should be identified and selected for testing that is appropriate for the display(s) and failure condition(s) to be assessed.

NOTES:

1. For an ILS or GLS approach in a significant wind gradient, a value of 1 dot is considered a reasonable value for crew recognition. In smooth atmospheric conditions with steady state tracking with the vertical flight path typically maintained at less than a fraction of a needle width, a detection and recognition threshold even below 1/2 dot may be suitable.

2. For RNAV systems that do not use dots, some multiple of needle width related to an established crew monitoring tolerance of normal performance may be appropriate (e.g., x needle widths of deviation on the VNAV scale).

3. Credit may be taken for excessive deviation alerts, if available.

(d) On an approach without vertical path reference, criteria similar to the climb/descent condition can be assumed

(4) Oscillatory. It is assumed that oscillatory failures that have structural implications are addressed under 14 CFR Part 25, Subpart C, § 25.1309. It can be assumed that the flightcrew will disengage the automatic control elements of the FGS that have any adverse oscillatory effect and will not follow any adverse oscillatory guidance. However, if there are any elements of the FGS that can not be disconnected in the presence of an oscillatory Failure Condition, the long term effects on crew workload and the occupants will need to be evaluated.

d. Pilot Reaction Time. The pilot reaction time is considered to be dependent upon the pilot attentiveness, based upon the phase of flight and associated duties. The following assumptions are considered acceptable:

(1) Climb, Cruise, Descent and Holding: Recovery action should not be initiated until three seconds after the recognition point.

(2) Maneuvering Flight. Recovery action should not be initiated until one second after the recognition point.

(3) Approach. The demonstration of malfunctions should be consistent with operation in non–visual conditions. The pilot can be assumed to be carefully monitoring the airplane performance and will respond rapidly once the malfunction has been recognized. A reaction time of one second between recognition point and initiation of recovery is appropriate for this phase of flight.

NOTES:
1. For the final phase of landing (e.g., below 80 feet), the pilot can be assumed to react upon recognition without delay.

2. For phases of flight where the pilot is exercising manual control using control wheel steering, if implemented, the pilot can be assumed to commence recovery action at the recognition point.

e. Pilot Recovery

(1) Pilot Recovery Action. The recovery action should be commenced after the reaction time. Following such delay, the pilot should be able to return the airplane to its normal flight attitude under full manual control without engaging in any dangerous maneuvers during recovery and without control forces exceeding the values given in § 25.143 (c). During the recovery, the pilot may overpower the automatic pilot or disengage it.

(2) Minimum Autopilot Use Height. For the purpose of determining the minimum height at which the autopilot may be used during an approach or for height loss assessments, a representative recovery appropriate to the airplane type and flight condition should be performed. This maneuver should not lead to an unsafe speed excursion to resume a normal flight path. An incremental normal acceleration in the order of 0.5 g is considered the maximum for this type of maneuver.

3. TAKEOFF

a. Worst Case Failure Condition. The primary concern for the takeoff phase of flight is the effect of the worst case Failure Condition identified by the Safety Assessment on the following:

(1) The net effect on the flight path of the airplane after takeoff, and

(2) The airplane's attitude and speed during climbout.

b. Evaluation. Failures that would cause the airplane to pitch up, pitch down, and bank during the takeoff should be evaluated, if those failure conditions exist (given the architecture of a specific FGS) and are relevant to the Safety Assessment.

c. On Runway Guidance. If the FGS provides on runway guidance for takeoff, the effect of any failures of that takeoff guidance should be assessed. Refer to AC 120-28D for additional information.

4. CLIMB, CRUISE, DESCENT AND HOLDING. Where the Safety Analysis identifies a Failure Condition requiring flight/ simulator evaluation with pilot assessment, the height loss should be established in accordance with the method described in the flight test procedures Appendix D–Flight Test Procedures, Section 5.b.(4)(iii).

5. MANEUVERING. Where the Safety Analysis identifies a Failure Condition that has a dynamic effect on the roll control of the airplane, the Failure Condition should be introduced at the bank angle for normal operation. The bank angle should not exceed 60 degrees when the pilot recognition and the recovery times identified above are applied.

6. APPROACH

a. General. A discussion of the operational considerations for approach operations is contained in Chapter 16, Part D. This section identifies test criteria to support those considerations. The safety assessment process should identify the demonstration of specific Failure Conditions during the approach. The fault demonstration process during approach should include the four phases identified in Chapter 16, Part C, Section 2. The Failure Condition should be inserted at a safe but representative height. The deviation profile should be identified and applied as indicated in Appendix D –Flight Test Procedures, Section 5.b.(4).

b. Approach with Vertical Path Reference

(1) <u>xLS (ILS, MLS, GLS)</u>

(a) ILS and MLS operations are typically conducted on instrument approach procedures designed in accordance with United States TERPS or ICAO PANS-OPS criteria, or equivalent. These criteria together with ICAO Annex 14 are generally intended to take into account obstacles

beneath a reference obstacle identification surface. It is expected that the same or equivalent criteria will be applied to GLS operations.

(b) In assessing the implication of the effect of failures during autopilot operations, a reference 1:29 slope penetration boundary has been applied against the deviation profile to identify an appropriate altitude for continued autopilot operation. The 1:29 slope has been found to provide an acceptable margin above obstacles on an approach.

(c) The worst case Failure Condition identified by the Safety Assessment (see Chapter 15, Part E) should be demonstrated against the deviation profile criteria and a Minimum Use Height (MUH) established (See Appendix D–Flight Test Procedures, Section 5.b.(4)).

(2) RNAV (Area Navigation)

(a) For RNAV coupled approach operations, a vertical flight path similar to an xLS flight path will be used (e.g., 3 degree path starting 50 feet above the threshold). However, due to sensor characteristics it is assumed that RNAV operations will be conducted with a DA(H) or MDA(H) that is higher than an equivalent MUH on an xLS approach to the same runway. Further, for this type of operation it should be noted that the MUH is always in the visual segment of the approach, where the failure recognition and recovery are assumed to be conducted with the pilot having established outside visual reference.

(b) In order to derive only one MUH value for simplicity of use, it is assumed that the effects of failure on the autopilot in RNAV operation are no worse than for the xLS operation No further determination or demonstration is required. However, the applicant should show that due account has been taken in the Safety Assessment of the differences between the RNAV and xLS inputs to the autopilot (e.g,. barometric altitude input, FMS position and guidance commands, and their failure effects). If these effects can be bounded or otherwise reconciled, then the xLS demonstrated MUH may also be considered applicable to RNAV operations.

(c) If these effects can not be bounded or accounted for within those for the xLS operation, the MUH should be determined in accordance with an Approach Without Vertical Path Reference (see Section c. below).

c. Approach without Vertical Path Reference. For an approach without vertical path reference (e.g., VOR, NDB, localizer only) the FGS mode of operation is typically vertical speed/flight path angle (i.e., a cruise mode). The worst case Failure Condition for this type of mode should be

demonstrated in the approach configuration. An appropriate height loss should then be established in accordance with the method described in Appendix D–Flight Test Procedures, Section 5.b.(4)(iii).

d. Steep Approach. In support of an approval to use the FGS on glidepath angles of greater than 3.75 degrees (see Chapter 16, Part E) an assessment should be made of the effects of failure conditions for this type of operation. For use of autopilot, an appropriate MUH should be established in accordance with the deviation profile method described in this section. For this assessment, the obstacle plane associated with a nominal 3 degree glidepath angle (1:29 slope) should be adjusted, according to the maximum approach angle for which approval is sought.

7. SPECIFIC CONDITIONS

a. Failure Conditions to Be Evaluated. The following are failure conditions that should be considered as part of the FGS evaluation program:

(1) Engine failure during approach; continue approach to Decision Altitude/ Minimum descent Altitude (DA/ MDA).

(2) Potential fuel imbalance.

(3) Airplane system failures that affect FGS operational capabilities. Examples include failures of hydraulic systems, electrical systems, flight controls, and FGS related sensors. When possible, these failure conditions should be evaluated with a flight test. However, some failure conditions, due to their potential hazards, may best be evaluated via a high fidelity flight simulation.

b. Failure to Disengage. The probability of failure of an FGS element to disengage when the quick disengagement control is operated should be shown to be acceptable by the Safety Analysis process. If credit is to be taken for acceptable continued manual operation with the FGS elements remaining engaged, i.e., without operating any of the other disengagement controls, then a flight demonstration should be conducted though approach, landing and rollout.

16. COMPLIANCE DEMONSTRATION USING FLIGHT TEST AND SIMULATION

D. Criteria Supporting Operational Use Of Autopilot

1. **TYPICAL FLIGHT OPERATIONS**. The criteria contained in this section are intended to identify how the functional capability of the FGS, established during the certification, can be utilized to support typical flight operations. The criteria are based on experience gained from certification programs and functionality provided by traditional systems. A FGS providing non-traditional functionality—using new or novel technology and/or implementation techniques—may require additional criteria to be established.

2. **OPERATIONS IN CLOSE PROXIMITY TO THE GROUND**

a. General. During low visibility operations, multiple redundant autopilot channels may be used, and the effect of any autopilot failures on the flight path may be eliminated or substantially minimized by the protection provided by that redundancy. The considerations in the following sections apply primarily to single channel operations where performance or integrity aspects may require further consideration. See also Chapter 15, Part F, Section 2 which identifies specific considerations relating to autopilot operations close to the ground in the presence of failures.

b. Minimum Engagement Point. The minimum engagement point for the autopilot after takeoff and the minimum use of the autopilot during approach should take into consideration the effect of the following:

(1) Failures and their effects (i.e., Failure Conditions).

(2) Fault–free performance.

(3) Any specific operational considerations and/or mitigation.

c. Autopilot Engagement after Takeoff

(1) Deviation from Flight Path. The potential deviation of the airplane from the desired flight path due to the effect of a Failure Condition may necessitate delaying the engagement of an autopilot to an acceptable height above the departure runway.

(2) Worst–Case Deviation Profile. To support this determination, if autopilot Failure Condition(s) are identified that will cause a significant deviation below the intended vertical flight path, the worst–case deviation profile should be identified. This profile and the recovery of the airplane should not result in penetration of the net flight path as defined in § 25.115.

(3) Other Effects. If the Failure Condition(s) have a neutral effect on the flight path but has implications for speed control during takeoff, the acceptability of cues for the flightcrew detection of the condition should be made. The effect of any Failure Condition relating to the bank angle of the airplane should also be assessed. In all of the above, account should be taken of operating the airplane at the Weight/ Altitude/ Temperature (WAT) limit.

(4) Minimum Engagement Height. The minimum engagement height will typically be established, based on the greatest of the following factors:

(a) The lowest altitude or height where the flightcrew could reasonably be assumed to engage the autopilot. Consideration should be given to normal flightcrew tasks during rotation and liftoff (typically 100 feet or greater).

(b) Any allowance for the acceptability of the performance of the autopilot during the basic engagement/mode transition.

(c) The lowest altitude or height consistent with the response of the airplane to any identified autopilot Failure Condition(s).

(d) Activation of stall identification system (e.g., stick pusher) armed (if installed).

(5) Deviation Information. If the response to the worst-case failure condition causes a significant transition below the intended vertical flight path, the deviation information should be provided in the AFM.

d. Autopilot Engagement during Approach

(1) Deviation from Flight Path. The potential deviation of the airplane from the desired flight path due to the effect of a Failure Condition may necessitate the disengagement of an autopilot at an appropriate height on the approach to landing.

(2) Minimum Engagement Height. The operational minimum engagement height will be established, based on the following considerations:

(a) The altitude or height at which the performance of the automatic control is no longer acceptable,

(b) The lowest altitude or height consistent with the response of the airplane to a subsequent autopilot failure, and

(c) Any specific operational consideration.

(3) Approach with Vertical Path Reference

(a) Approaches with vertical path reference can include xLS (i.e., ILS, MLS and GLS) or RNAV. Operations using xLS can be assumed to be conducted with respect to a flight path prescribed or established as an integral part of navigation service provided by the State of the airport. RNAV approach operations will be conducted using an onboard database that provides a navigation flight path to the runway.

(b) The operational consideration for this type of operation relates to an assessment of the adequacy of continued use of the autopilot in maintaining the desired vertical flight path. Considerations include the lowest altitude consistent with the response of the airplane to an autopilot failure.

(c) To support this determination, if one or more autopilot Failure Condition(s) is identified that causes a significant transition below the intended vertical flight path, the worst-case deviation profile should be identified using the method identified in Chapter 16, Part C, Section 6.b. If the Failure Condition(s) has a neutral effect on the flight path, the acceptability of cues for the flightcrew detection of the condition should be made. The effect of any Failure Condition relating to the bank angle of the airplane should be assessed.

(d) For the purpose of the airworthiness assessment, the vertical flight path an xLS and RNAV approach can be assumed to be a flight path of three degrees that passes through the runway threshold at an altitude of fifty feet.

(e) The vertical flight path control for a xLS approach will be made with reference to the path defined by the navigation service. The RNAV vertical flight path will typically be conducted with reference to barometric altitude. An appropriate adjustment to the minimum use height may be necessary to take into account the vertical accuracy of RNAV operations.

NOTE: Temperature effect compensation should be considered as part of the operational authorization.

(f) The Minimum Use Height is the value identified using method identified in Appendix D–Flight Test Procedures, Section 5. b. (4).

(4) Approach without Vertical Path Reference

(a) Flight operations with no vertical path reference are conducted with an appropriate visual segment for final approach path. In the interest of providing appropriate automatic control to assist in a stabilized approach, the minimum use of the autopilot should be consistent with the performance needed for the descent (e.g., vertical speed/flight path angle) and the pilot detection and recovery from an autopilot failure.

(b) To support this determination, if one or more autopilot Failure Conditions is identified that causes a significant transition below the intended vertical flight path, the worst-case deviation profile should be identified. If the Failure Condition has a neutral effect on the flight path but has implications for speed control during takeoff, the acceptability of cues for the flightcrew detection of the condition should be made. The effect of any Failure Condition relating to the bank angle of the airplane should be assessed.

(c) For FGS that are failure protected (i.e., fail–passive), the minimum engagement height will typically be no lower than 50 feet above runway elevation. However, when determining this limitation, account should be taken of the handling task presented to the pilot when regaining manual control, especially in limiting crosswind conditions.

(d) For FGS that are not failure protected (i.e., not fail-passive), the demonstrated minimum use height will typically be established based on the greater of the following considerations:

(i) 50 feet above runway elevation, or

(ii) Two times the Height Loss for the airplane as a result of any identified autopilot Failure Condition, using the method identified in Appendix D–Flight Test Procedures, Section 5. b. (4).

e. Circling Approach. For the purpose of this AC, circling approaches may be considered to have the following visual segments associated with the approach:

- A segment at or above the minimums prescribed by the procedure that parallel the runway in the opposite direction of the landing runway,
- A turning segment to align with the runway that can be level or partially descending, and
- A final descending segment to landing.

Operationally, the autopilot may remain engaged even after leaving the minimum altitude (MDA(H)) for reasons related to safety and flightcrew workload relief. This operational procedure should be balanced against unacceptable performance or failure characteristics. As this procedure is in the visual segment, no specific constraints for the use of the autopilot are considered necessary for this phase of flight, unless specific unacceptable performance or failure characteristics related to circling approach are identified during the certification program.

3. CLIMB, CRUISE, DESCENT, AND HOLDING. The value of the use of the autopilot in providing flightcrew workload relief in climb, cruise, descent, and holding phases of flight should be balanced against the failure characteristics of the autopilot. No specific constraints for the use of the autopilot are considered necessary for these phases of flight, unless specific unacceptable performance or failure characteristics related to climb, cruise, or descent are identified during the certification program.

4. MANEUVERING. No specific constraints for the use of the autopilot are considered necessary for maneuvering flight, unless unacceptable performance or failure characteristics are identified during the certification program. Chapter 16, Section C.5 provides assessment criteria for maneuvering flight for autopilot failures.

16. COMPLIANCE DEMONSTRATION USING FLIGHT TEST AND SIMULATION

E. Automatic Disengagement Of The Autopilot

Automatic disengagement of the FGS system will occur for several reasons, such as system failures, sensor failures, or unusual accelerations. The automatic disengagement characteristics of the FGS should be investigated throughout the flight envelope. These disengagement cases should be analyzed to determine the ones that can be demonstrated during the test program. For each disengagement, the transients, warnings, and pilot workload for recovery should be evaluated, and compliance with § 25.1329 (d) and (e) should be verified. The use of simulation is recommended for all conditions that are expected to result in significant transients.

16. COMPLIANCE DEMONSTRATION USING FLIGHT TEST AND SIMULATION

F. Assessment Of Human Factors

1. **GENERAL**. The evaluation, demonstration and testing should assess the acceptability of the human–machine interface with the FGS and the potential for flightcrew errors and confusion concerning the behavior and operation of the FGS, based on the criteria described in earlier sections.

2. **NORMAL AND NON-NORMAL OPERATIONS.** The evaluation of normal and non–normal FGS operations should include the representative range of conditions in terms of crew mental or physical workload, required crew response timeliness, and potential for confusion or indecision. The set of test cases should represent operationally relevant scenarios and the assumptions about pilot training and skill level should be documented.

3. **FLIGHT EVALUATIONS.**

a. **During Certification**. Flight evaluation during certification is a final assessment and is intended to validate the design.

b. **Prior to Certification.** Evaluations prior to certification are typically conducted in a variety of ways and at different levels of fidelity in order to finalize the design. These may include the following:

(1) Engineering evaluations and task analyses, including cognitive and physical tasks.

(2) Mock–up evaluations and demonstrations.

(3) Part–task evaluations and demonstrations.

(4) Simulator evaluations, demonstrations, and tests.

(5) Engineering flight evaluations, demonstrations, and tests.

c. **Credit to Establish FGS Compliance.** Data from flight evaluations may be useful for credit to establish FGS compliance with regulations having human factors considerations. In addition, applicants have successfully used comparisons to previously certificated designs to obtain such credit (although such credit is not assured). Specific attention should be given to any new FGS flightcrew interface designs or functions.

d. Simulation versus Flight Tests. In some cases, certification authorities may consider that less flight testing may be required to show compliance, if the simulation evaluations have added confidence with respect to the reduced potential for crew error and confusion and other human factors attributes of the pilot/FGS interface.

(1) Selecting Methodology. In many cases the evaluation, demonstration and test scenarios, including failures and environmental events, will determine whether the data should be obtained in simulation or in flight because of safety considerations or unavailability of the necessary environmental conditions.

(2) High Fidelity Simulation. In some of these cases, a very high fidelity simulation will be needed. In addition to the simulation validation considerations identified in Section 16. B. 5.b., the simulation used may need to include the following features, depending on the functionality of the FGS:

(a) Physical implementation of flight deck controls, displays, indicators and annunciators for all flightcrew positions that are relevant to the objectives of the evaluation.

(b) Adequate emulations of relevant equipment (hardware and software function, including capability to introduce failures).

(c) Weather simulation, including gusts, turbulence, windshear, and visibility.

(d) Representation of the operational environments, including interaction with air traffic services, day/night operations, etc., as relevant to the functions and pilot tasks being evaluated.

(e) Data collection capabilities.

(3) Simulation Conformity. In some cases, certification credit or demonstration of compliance using simulations cannot be granted due to inability to find simulation conformity.

4. SIMULATOR EVALUATIONS. Simulator evaluations and tests are intended to generate objective and/or subjective data. It may not always be possible or necessary to obtain quantifiable measurements of flightcrew performance, even with high fidelity flight or simulation evaluation, demonstration, or test scenarios. In these cases, evaluation procedures

should be based on the use of structured subjective methods, such as rating scales, questionnaires and/or interviews. When there is dependence on this type of data, evaluations should consider multiple data collection techniques with an appropriate number of pilot evaluators.

5. PILOT TRAINING AND EXPERIENCE. In order to provide sound evaluations, pilots should be trained appropriately on the FGS system operation and procedures. They should have experience in the kinds of operation and aircraft types for which the FGS is intended. Finally, they should be familiar with the intended function of the FGS, its operational and design philosophy, and the way that this philosophy fits with the overall flight deck and its operational and design philosophy.

6. EVALUATING NEW OR UNIQUE DESIGN FEATURES. Rationale should be provided for decisions regarding new or unique features in a design. It should be confirmed that the data resulting from the evaluations support acceptability of any new or unique features.

7. HUMAN FACTORS CONSIDERATIONS. The certification planning documentation should describe the means to show compliance with the human factors related considerations of the FGS with this AC.

17. AIRPLANE FLIGHT MANUAL

A. General

The following sections provide guidance on material to be provided in the Airplane Flight Manual (AFM) to ensure that the appropriate information related to FGS operation is translated into air carrier operations. For additional guidance, note that AC 25.1581–1 addresses requirements of the AFM for transport category aircraft and distinguishes between those aircraft that are used in air carrier operations and those not in air carrier service.

The terminology used in the AFM should be consistent with the intended operational use.

Appropriate AFM information related to low-visibility operations is addressed in AC120–28D and AC 120–29A.

B. Information Supporting Operational Use Of Autopilot

1. GENERAL. The airworthiness certification process will assess the effect of autopilot Failure Conditions as identified in Chapters 15 and 16. If a specific Minimum Use Height [MUH] is necessary, then the height should be provided in the Limitations section of the AFM. If the design is such that the effects of one or more Failure Conditions do not require establishment of a MUH, then the pertinent deviation profile or height loss information should be provided in the Normal or Non-normal section of the AFM, as applicable.

2. SPECIFYING A MINIMUM USE HEIGHT. If a MUH or a Height Loss value is applicable, it should be specified as follows:

a. Takeoff —Autopilot Engagement Altitude or Height.

> **NOTE**: If minimum engagement altitude(s) or height(s) are not specified, then "maximum displacement deviation" information from a pertinent takeoff flight path and approach profile should be provided in the AFM Normal Procedures section, or in the associated Flightcrew Operation Manual (FCOM).

b. Cruise—Height Loss

c. Approach—MUH or Height Loss

(1) Approach with Vertical Path Reference. The MUH should be determined based on clearance above a 1:29 plane using the Deviation Profile Method, as discussed in Appendix D, Section 5 and shown in Figure D-1 of this document.

(2) Approach without Vertical Path Reference. The Height Loss should be determined using the Height Loss Method, as discussed in Appendix D, Section 5, and shown in Figure D-2 of this document.

C. Limitations

The Limitations section of the AFM presents those FGS operating limitations appropriate to the airplane model as established in the course of the type certification process. FGS operational limitations (should any exist) should specify any configuration/ envelope restrictions.

D. Non-normal/ Emergency Procedures

The AFM should include Non–normal or Emergency Procedures appropriate to the FGS identified during the certification program.

E. Normal Procedures

1. GENERAL

a. Documentation of Normal Procedures. The normal procedures for use of the FGS should be documented in the AFM or FCOM, as appropriate. These procedures should be demonstrated during the type certification process.

b. Maximum Displacement Deviation. In lieu of specification of minimum engagement altitude(s) or height(s) (see Part B above), the AFM may

alternately specify "maximum displacement deviations" from a specified takeoff flight path or from a specified approach profile. This information may be based on typical departure or approach flight paths suited for the aircraft type and for failure conditions that are determined applicable to the type of FGS system and modes suitable for use.

c. **Procedures For Use of FGS in Icing Conditions**. The flight manual should include any necessary procedures for the use of the flight guidance system in icing conditions (including moderate and heavy icing conditions). In particular, the procedures should include any necessary changes in operating speeds, required either operationally or as a result of relevant design features of the speed protection function of the FGS. For example, variations in minimum speeds as a function of de/anti-icing system selection, speed increments during approach, and landing in turbulence should be part of the documented procedures.

2. AIRCRAFT WITH PUBLISHED FLIGHTCREW OPERATION MANUALS (FCOM). The AFMs for aircraft for which the manufacturer has published a FCOM should contain essential information on normal operating procedures that are considered unique to the operation of the FGS for the aircraft type or are otherwise necessary for safe operation. FGS description and integration with the overall flight deck design philosophy, specification, and operational procedures that are normally associated with flight guidance systems should be included in the FCOM. If applicable, a FCOM may contain the "maximum displacement deviation" information described in Chapter 17, Part B in either numeric or graphic form

3. AIRCRAFT WITHOUT PUBLISHED FLIGHTCREW OPERATION MANUALS. For aircraft that rely on the AFM as the sole operating manual, the AFM should contain operating information sufficient for flightcrew reference. FGS description and integration with the overall flight deck design philosophy, specification and operational procedures that are normally associated with flight guidance systems should be made available so that an appropriately trained flightcrew may operate the FGS under normal conditions.

APPENDIX A. DEFINITIONS

The following definitions apply to the requirements of § 25.1329 and the guidance material provided in this AC. They should not be assumed to apply to the same or similar terms used in other regulations or AC's. Terms for which standard dictionary definitions apply are not defined in this AC.

Abnormal Condition
See Non-normal Condition.

Advisory
Crew awareness is required and subsequent crew action may be required.

Alert
A generic term used to describe a flight deck indication meant to attract the attention of the flightcrew to a non-normal operational or airplane system condition without implying the degree or level of urgency for recognition and corrective action by the crew. Warnings, Cautions and Advisories are considered to be Alerts.

Analysis
The terms "analysis" and "assessment" are used throughout. Each has a broad definition and the two terms are to some extent interchangeable. However, the term analysis generally implies a more specific, more detailed evaluation, while the term assessment may be a more general or broader evaluation but may include one or more types of analysis [AC 25.1309].

Arm
A condition where the intent to transition to a new mode or state has been established but the criteria necessary to make that transition has not been satisfied.

Assessment
See the definition of analysis above [AC 25.1309].

Autopilot
The autopilot function provides automatic control of the airplane, typically in pitch, roll, and yaw. The term includes the sensors, computers, power supplies, servo-motors/actuators and associated wiring, necessary for its function. It includes any indications and controllers necessary for the pilot to manage and supervise the system. Any part of the autopilot that remains connected to the primary flight controls when the autopilot is not in use is regarded as a part of the primary flight controls.

Autothrust
The autothrust function provides automatic control of the thrust of the airplane. The term includes the sensors, computers, power supplies, servo-motors/actuators and associated wiring, necessary for its function. It includes any indications and controllers necessary for the pilot to manage and supervise the system. Any part of the autothrust that remains connected to the engine controls when the autothrust is not in use is regarded as a part of the engine control system.

Caution
A flight deck indication that alerts the flightcrew to a non-normal operational or airplane system condition that requires immediate crew awareness. Subsequent pilot corrective compensatory action will be required.

Cognitive Task Analysis
An analysis that focuses on the mental processes, skills, strategies, and use of information required for task performance.

Complex
A system is Complex when its operation, failure modes, or failure effects are difficult to comprehend without the aid of analytical methods [AC 25.1309].

Conformal
Positioned and scaled with respect to the outside view.

Control Wheel Steering (CWS)
A Flight Guidance System (FGS) function which, when engaged, enables the pilot/first officer to manually fly the airplane by positioning the flight control surfaces using the autopilot servos. The positions of the flight deck controls (e.g., control column, control wheel) are determined by the FGS, which converts them into autopilot servo commands. The autopilot servos, in turn, drive the appropriate flight control surfaces.

Conventional
A system is considered to be Conventional if its functionality, the technological means used to implement its functionality, and its intended usage are all the same as, or closely similar to, that of previously approved systems that are commonly used [AC 25.1309].

Engage
A steady state that exists when a flightcrew request for mode or system functionality has been satisfied.

Error
An omission or incorrect action by a crew member or maintenance personnel, or a mistake in requirements, design, or implementation [AC 25.1309].

Failure
An occurrence which affects the operation of a component, part, or element such that it can no longer function as intended (this includes both loss of function and malfunction).

NOTE: Errors may cause failures, but are not considered to be failures [AC 25.1309].

Failure Condition
A condition having an effect on the airplane and/or its occupants, either direct or consequential, which is caused or contributed to by one or more failures or errors, considering flight phase and relevant adverse operational or environmental conditions, or external events. [AC 25.1309]

Fail Operational System
A system capable of completing an operation, following the failure of any single element or component of that system, without pilot action.

Fail Passive System
A system which, in the event of a failure, results in:
(a) no significant deviation in the aircraft flight path or attitude and
(b) no out-of-trim condition at disengagement that is not easily controlled by the pilot.

Flight Director
A visual cue or set of cues that are used during manual control of the airplane as command information to direct the pilot how to maneuver the airplane, usually in pitch, roll and/or yaw, to track a desired flight path. The flight director, displayed on the pilot's primary head down attitude indicator (ADI) or head up display (HUD), is a component of the flight guidance system and is integrated with airborne attitude, air data and navigation systems.

Flight Guidance System
A system consisting of one or more of the following elements:

- autopilot,
- flight director, and
- automatic thrust control.

A flight guidance system also includes any interactions with stability augmentation and trim systems.

Flight Management System
An aircraft area navigation system and associated displays and I/O device(s) having complex multi-waypoint lateral (LNAV) and vertical (VNAV) navigation capability (or equivalent), data entry capability, data base memory to store route and instrument flight procedure information, and display readout of navigation parameters. The Flight Management System provides guidance commands to the FGS for the purpose of automatic navigation and speed control when the FGS is engaged in an appropriate mode or modes (e.g., VNAV, LNAV, RNAV).

Head-Up Display (HUD)
A transparent optical display system located level with and between the pilot and the forward windscreen. The HUD displays a combination of control, performance, navigation, and command information superimposed on the external field of view. It includes the display element, sensors, computers and power supplies, indications and controls. It is integrated with airborne attitude, air data and navigation systems, and as a display of command information is considered a component of the flight guidance system.

Inadvertent
A condition or action that was not planned or intended.

Latent Failure
A failure is latent until it is made known to the flightcrew or maintenance personnel. A significant latent failure is one, which would in combination with one or more specific failures, or events result in a Hazardous or Catastrophic Failure Condition [AC 25.1309].

Limit Flight Envelope
The flight envelope of the airplane associated with the limit loads of the airplane structure.

Minimum Use Height (MUH)
A height specified during airworthiness demonstration or review above which, under standard or specified conditions, a probable failure of a system is not likely to cause a significant path displacement unacceptably reducing flight path clearance from specified reference surfaces (e.g., airport elevation) or specified obstacle clearance surfaces [AC 120-29A].

Minor transient
See "Transient."

Mode
A mode is system configuration that corresponds to a single (or set of) FGS behavior(s).

Non-normal Condition
A condition or configuration of the airplane that would not normally be experienced during routine flight operations—usually due to failures. Also includes unusual airplane ferry configurations, such as transporting a spare engine or landing gear locked down ferry flight.

Normal Condition
Any fault free condition typically experienced in normal flight operations. Operations typically well within the aircraft flight envelope, and with routine atmospheric and environmental conditions.

Normal Flight Envelope
The range of altitude and operating speeds that are defined by the airplane manufacturer as consistent with conducting flight operations for which the airplane is designed. This envelope is generally associated with practical, routine operation and/or prescribed conditions, whether all-engine or engine inoperative.

Other Than Normal Condition
A combination of Rare Normal and Non-Normal conditions.

Override
An action taken by the flightcrew intended to prevent, oppose or alter an operation being conducted by a flight guidance function, without first disengaging that function.

Rare Normal Condition
A fault-free condition that is experienced infrequently by the airplane due to severe environmental conditions (e.g., significant wind, turbulence, or asymmetric icing).

Redundancy
The presence of more than one independent means for accomplishing a given function or flight operation [AC 25.1309].

Select
The flightcrew action of requesting functionality or an end state condition.

Significant transient
See "Transient."

Stability Augmentation System
Automatic systems which provide or enhance stability for specific aerodynamic characteristics of an airplane (e.g., Yaw Damper, Longitudinal Stability Augmentation System, Mach Trim).

System
A combination of components, parts, and elements that are inter-connected to perform one or more specific functions [AC 25.1309].

Transient
A disturbance in the control or flight path of the airplane that is not consistent with response to flightcrew inputs or environmental conditions.

a. Minor transient: A transient that would not significantly reduce safety margins and which involves flightcrew actions that are well within their capabilities involving a slight increase in flightcrew workload or some physical discomfort to passengers or cabin crew.
b. Significant transient: A transient that would lead to a significant reduction in safety margins, an increase in flightcrew workload, discomfort to the flightcrew, or physical distress to passengers or cabin crew, possibly including non-fatal injuries.

   NOTE: The flightcrew should be able to respond to any significant transient without:
   - exceptional piloting skill, alertness, or strength,
   - forces greater than those given in § 25.143(c), and
   - accelerations or attitudes in the airplane that might result in further hazard to secured or non-secured occupants.

Warning
A flight deck indication that alerts the flightcrew to a non-normal operational or airplane system requiring immediate recognition. Immediate corrective or compensatory action by the flightcrew is required.

APPENDIX B. ACRONYMS

AC	Advisory Circular
AFM	Airplane Flight Manual
AGL	Above Ground Level
AIM	Airman's Information Manual
ARP	Accepted and Recommended Practice
ATC	Air Traffic Control
AWO	All Weather Operations
CG	Center of Gravity
CDI	Course Deviation Indicator
CWS	Control Wheel Steering
DA	Decision Altitude
DA(H)	Decision Altitude (Height)
DME	Distance Measuring Equipment
EFIS	Electronic Flight Instrument System
EVS	Enhanced Vision System
FAA	Federal Aviation Administration
FCOM	Flightcrew Operations Manual
F/D	Flight Director
FGS	Flight Guidance System
FLCH	Flight Level Change
FMA	Flight Mode Annunciator
FMS	Flight Management System
GA	Go-around
GLS	GNSS Landing System
GNSS	Global Navigation Satellite System
GPWS	Ground Proximity Warning System
HDD	Head Down Display
HUD	Head-Up Display

IAS	Indicated Air Speed
ICAO	International Civil Aviation Organization
ILS	Instrument Landing System
IMA	Integrated Modular Avionics
IMC	Instrument Meteorological Conditions
LNAV	Lateral Navigation
LOC	Localizer
MDA(H)	Minimum Descent Altitude (Height)
MLS	Microwave Landing System
MSL	Mean Sea Level
MSP	Mode Select Panel
MUH	Minimum Use Height
NAV	Navigation
ND	Navigation Display
NDB	Non Directional Beacon
NPA	Notice of Proposed Amendment
NPRM	Notice of Proposed Rulemaking
PF	Pilot Flying
PFD	Primary Flight Display
PNF	Pilot Not Flying
RNAV	Area Navigation
RNP	Required Navigation Performance
RTO	Rejected Takeoff
RVSM	Reduced Vertical Separation Margin
SAE	Society of Automotive Engineering
SVS	Synthetic Vision System
TCAS	Traffic Collision Alert System
TCS	Touch Control Steering
TO	Takeoff
TOGA	Takeoff or Go–around

VMC	Visual Meteorological Conditions
VNAV	Vertical Navigation
VOR	VHF Omni Range
WAT	Weight Altitude Temperature

APPENDIX C: SAFETY ASSESSMENT

1. GENERAL. This section provides material that may be useful in supporting the safety assessment activities identified in Chapter 15.

2. IDENTIFICATION OF FAILURE CONDITIONS. The following failure conditions should be considered for applicability when establishing Failure Conditions, as indicated in Chapter 15.

a. Loss of Autopilot in Single or Multiple Axes.

b. Loss of Guidance in single or Multiple Axes.

c. Loss of Thrust Control.

d. Partial Loss or Degradation of Autopilot Function.

e. Unintended Autopilot Commands in a Single Axis or Multiple Axes Simultaneously (e.g., Hardover, Slowover, and Oscillatory Failure Modes).

f. Unintended Guidance Commands in a Single Axis or Multiple Axes.

g. Unintended Thrust Control.

h. A Sustained Out–Of–Trim Condition with the Autopilot Engaged without a Warning.

i. An Autopilot Disengagement in an Out–Of–Trim Condition.

j. Autopilot Disengagement without a Warning.

k. Inability to Disengage the Autopilot or Autothrust Function.

l. Un–commanded Engagement of an Autopilot or autothrust.

m. Jamming or Loading of Primary Flight Controls.

n. Un–intended Thrust Asymmetry.

A typical Failure Condition statement may be of the form:

> ***'[Failure]'*** during ***'[Phase of Flight]'*** that ***'[Effect]'*** when ***'[Mitigation Consideration]'***

Failure Conditions may result from failures within the FGS or from failure associated with aircraft interfacing systems or components (e.g., navigation receivers, attitude heading reference systems, flight management systems, hydraulics, electrical systems, etc.).

3. CONSIDERATIONS WHEN ASSESSING THE SEVERITY OF FAILURE CONDITION EFFECTS

a. Definition. The Failure Condition definition is complete (as defined in AC 25.1309) when the effects resulting from the failure are identified. A complete definition of the Failure Condition and its effect will then support the subsequent Failure Condition classification.

b. Factors To Consider. When assessing the effect that results from a failure, the following factors should be considered for various phases of flight:

(1) The impact of the loss of control or unintended control on the structural integrity of the airplane as a result of simple loading or as a result of excitation of aerodynamic or structural modes—both at the time of occurrence and while the flight continues.

(2) Implications of the airplane response in terms of attitude, speed, accelerations, flight path, and the impact on the occupants and on flightcrew performance.

(3) Degradation in the stability or other flying qualities of the airplane.

(4) The duration of the condition.

(5) The aircraft configuration.

(6) The aircraft motion cues that will be used by the flightcrew for recognition.

(7) Availability, level, and type of alerting provided to the flightcrew.

(8) Expected Flightcrew corrective Action on Detection of the Failure.

c. Possible Characteristics of Failure Conditions.

(1) "Hardover" effects—typically are considered to be significant and are readily detectable by the flightcrew, based on the resulting aircraft motion or guidance cues.

(2) "Slowover" effects—typically are not readily detected by the flightcrew. The effect may involve departures from intended flight path that are not initially detectable by aircraft motion alone and may be detectable only by motion cues when a significant flight path deviation has occurred or by an appropriate flightcrew alert.

(3) "Oscillatory" effects—typically are repetitive motions or guidance conditions not related to intended guidance or control. The magnitude, period and duration of the condition and any mitigation considerations will determine the final effect.

(4) "Loss of" effects—typically is the removal of control, guidance or functionality that may have an immediate effect or may not be immediately apparent to the flightcrew.

Chapter 16 provides guidance on crew recognition considerations.

4. FAILURE CONDITION CLASSIFICATION

The following are examples of the type of Failure Condition effects that have been identified in previous airplane certification programs. The specific number and type of Failure Condition may vary with airplane type, airplane system architecture and FGS system design philosophy (e.g., failure detection, redundancy management, failure annunciation, etc.).

a. Catastrophic Failure Conditions. The following effects have been assessed Catastrophic in previous airplane certification programs:

(1) A load on any part of the primary structure sufficient to cause a structural failure preventing safe flight and landing;

(2) Unrecoverable loss of flight path control;

(3) Exceedance of V_{DF}/ M_{DF};

(4) Flutter or vibration that causes a structural failure preventing safe flight and landing;

(5) A temporary loss of control (e.g., stall) where the flightcrew is unable to prevent contact with obstacles or terrain;

(6) Deviations in flight path from which the flightcrew are unable to prevent contact with obstacles, terrain, or other aircraft.

b. Hazardous Failure Conditions. The following effects have been assessed Hazardous in previous airplane certification programs:

(1) Exceedance of an airspeed halfway between V_{MO} and V_{DF} or a Mach number halfway between M_{MO} and M_{DF};

(2) A stall, even if the flightcrew is able to recover safe flight path control;

(3) A load factor less than zero;

(4) Bank angles of more than 60 degrees en route or more than 30 degrees below a height of 1000 ft. (304.8 m above an applicable airport elevation);

(5) Degradation of the flying qualities of the airplane that excessively increases flightcrew workload;

(6) Failure that could result in a rejected take-off and high speed overrun (e.g., 60 knots);

(7) A flight path deviation that requires a severe maneuver to prevent contact with obstacle, terrain or other aircraft.

NOTE: Severe maneuver includes risk of serious injury or death of a small number of occupants

c. Major Failure Conditions. The following effects have been assessed Major in previous airplane certification programs:

(1) A flight path deviation, a required recovery maneuver, which may result in passenger injuries. Consideration should be given to phases of flight where the occupants may reasonably be moving about the airplane or be serving or consuming hot drinks.

(2) Degradation of the flying qualities of the airplane that significantly increase flightcrew workload.

APPENDIX D - FLIGHT TEST PROCEDURES

1. GENERAL. This Appendix contains Flight Test procedures that can be used to validate the operation of an FGS consistent with the Acceptable Means of Compliance documented in this AC. This information is in addition to that contained in AC 25-7A, "Flight Test Guide for Certification of Transport Category Airplanes."

2. PURPOSE AND SCOPE OF FLIGHT DEMONSTRATION PROGRAM.
A flight test program should be established that confirms the performance of the FGS for the modes of operation and the operational capabilities supported by its design. The operational implications of certain failures and failure conditions may require flight evaluation. The pilot interface with FGS controls and displays in the cockpit will need to be assessed.

Some aspects of the design may be validated by laboratory test and/or simulator evaluation. It is recommended that an applicant provide a certification flight demonstration plan to the authorities at a timely point in the development program.

The scope of the flight demonstration program will be dependent on the operational capability being provided, including any new and novel features. Early coordination with the regulatory authorities is recommended to reduce certification risks associated with the flight demonstration program.

The intent of the flight demonstration program is to confirm that the operation of the FGS is consistent with its use for the intended flight operations of the airplane type and configuration.

The modes of the FGS should be demonstrated in representative airplane configurations and under a representative range of flight conditions.

The following sections describe specific test procedure that can assist in that demonstration program.

3. PROTECTION FEATURES OF THE FGS
Protection feature are included in the design of an FGS to assist the flightcrew in ensuring that boundaries of the flight envelope or operational limits are not exceeded, leading to an unsafe condition. The means to alert the flightcrew to a condition or for the system to intervene to preclude the condition may vary, but certain operational scenarios can be used to assess the performance of the system in providing the protection function. The

following procedures can be used to evaluate the protection functions of an FGS:

a. Low Speed Protection

(1) Purpose. The low speed protection feature in an FGS is intended to prevent loss of speed to an unsafe condition [See Chapter 12, Part E, Section 2]. This may be accomplished by a number of means but should be evaluated under a number of scenarios.

(2) Cases To Consider. There are four cases that should be considered when evaluating when the Low Speed Protection function of a FGS:

(a) High Altitude Cruise Evaluation.

(i) At high altitude at normal cruise speed, engage the FGS into an Altitude Hold mode and a Heading or LNAV mode.

(ii) Engage the autothrust into a speed mode.

(iii) Manually reduce one engine to idle thrust.

(iv) As the airspeed decreases, observe the FGS behavior in maintaining altitude and heading/course.

(v) When the Low Speed Protection condition becomes active, note the airspeed and the associated aural and visual alerts including possible mode change annunciations for acceptable operation.

(b) Altitude Capture Evaluation at low altitude.

(i) At about 3000 feet MSL and 250 knots, engage the FGS into Altitude Hold and a Heading or LNAV mode.

(ii) Engage the autothrust into a speed mode.

(iii) Set the Altitude Pre-selector to 8000 feet MSL.

(iv) Make a flight level change to 8000 feet with a 250 knots climb at maximum climb power.

(v) When the FGS first enters the altitude capture mode, retard an engine to idle power.

(vi) As the airspeed decreases, observe the airplane trajectory and behavior.

(vii) When the Low Speed Protection condition becomes active, note the airspeed and the associated aural and visual alerts including possible mode change annunciations for acceptable operations.

(c) High Vertical Speed Evaluation.

(i) Engage the FGS in Vertical Speed Mode with a very high rate of climb.

(ii) Set the thrust to a value that will cause the airplane to decelerate at about 1 knot per second.

(iii) As the airspeed decreases, observe the airplane trajectory and behavior.

(iv) When the Low Speed Protection condition becomes active, note the airspeed and the associated aural and visual alerts including possible mode change annunciations for acceptable operation.

(d) Approach Evaluation.

(i) Conduct an instrument approach with vertical path reference.

(ii) Couple the FGS to the localizer and glideslope (or LNAV/VNAV, etc.).

(iii) Cross the Final Approach Fix/Outer Marker at a high-speed (approximately V_{ref} + 40 knots) with the thrust at idle power until low speed protection activates.

(iv) As the airspeed decreases, observe the airplane trajectory and behavior.

(v) When the Low Speed Protection condition becomes active, note the airspeed and the associated aural and

visual alerts including possible mode change annunciation for acceptable operation.

(vi) Note the pilot response to the alert and the recovery actions taken to recover to the desired vertical path and the re-capture to that path and the acceleration back to the desired approach speed.

NOTE: If the FGS remains in the existing mode with reversion to Low Speed Protection, the FGS should provide a suitable alert to annunciate the low speed condition. In this case, note the pilot response to the alert and the recovery actions taken to maintain the desired vertical path and to accelerate back to the desired approach speed.

b. High-Speed Protection

(1) Purpose. The high-speed protection feature in an FGS is intended to prevent a gain in airspeed to an unsafe condition [See Chapter 12, Part E, Section 3]. This may be accomplished by a number of means but should be evaluated under a number of scenarios.

(2) Cases to Consider. There are three cases that should be considered when evaluating the High-speed protection function of a FGS:

(a) High Altitude Level Flight Evaluation with Autothrust Function

(i) Select Autothrust Off (if an automatic wake-up function is provided; otherwise, select Autothrust on).

(ii) Engage the FGS in altitude hold.

(iii) Select a thrust level that will result in an acceleration beyond V_{MO}/M_{MO}.

(iv) As the airspeed increases, observe the behavior of the High-speed protection condition and any autothrust reactivation and thrust reduction, as applicable.

(v) Assess the performance of the FGS to control the airspeed to V_{MO}/M_{MO}, or other appropriate speed.

(b) High Altitude Level Flight Evaluation without Autothrust Function.

(i) Select a thrust value that will result in acceleration beyond V_{MO}/M_{MO} .

(ii) As the airspeed increases, observe the basic airplane overspeed Warning activate between V_{MO} + 1 and V_{MO} + 6 knots.

(iii) Observe the high-speed protection condition become active as evidenced by the unique visual alert and note possible FGS mode change.

(iv) Maintain the existing thrust level and observe the airplane depart the selected altitude.

(v) After sufficient time has elapsed to verify and record FGS behavior has elapsed, reduce the thrust as necessary to cause the airplane to begin a descent.

(vi) Observe the FGS behavior during the descent and subsequent altitude capture at the original selected altitude.

(c) High Altitude Descending Flight Evaluation with Autothrust Function.

(i) Select Autothrust Off (with automatic wake-up function) with thrust set to maintain airspeed 10% below V_{MO}/M_{MO} with the FGS engaged in altitude hold.

(ii) Select vertical speed mode that will result in acceleration beyond V_{MO}/M_{MO}.

(iii) As the airspeed increases observe the autothrust function reactivate and reduce thrust towards idle.

(iv) Observe the activation of FGS high-speed protection condition.

(v) Observe the reduction in pitch.

GENERAL NOTE: If the FGS remains in the existing mode with reversion to High Speed Protection, the FGS should provide a suitable alert to annunciate the high speed condition. In this

case, note the pilot response to the alert and the recovery actions taken to maintain the desired vertical path and to decelerate back to the desired speed.

4. ENVIRONMENTAL CONDITIONS

a. General. Some environmental conditions have created operational problems during FGS operations. It should be the objective of the flight demonstration program to expose the FGS to a range of environmental conditions as the opportunity presents itself. These include winds, windshear, mountain-wave, turbulence, icing, etc. However, some specific test conditions may have to be created to emulate operational conditions that are not readily achieved during normal flight test.

b. Icing

(1) General. The accumulation of ice on the airplane wings and airframe can have an effect on airplane characteristics and FGS performance. FGS operations may mask the onset of an airplane configuration that would present the pilot with handling difficulties when resuming manual control, particularly following any automatic disengagement of the FGS.

(2) Evaluation of FGS During Icing. During the flight test program the opportunity should be taken to evaluate the FGS during natural icing conditions including the shedding of the ice, as applicable. It is recommended that the opportunity should be taken to evaluate the operation of the FGS during basic airplane evaluation with 'ice shapes'. The following conditions should be considered for evaluating FGS performance under 'icing conditions':

(a) Icing in Holding Conditions. Refer to AC 25.1419-1 for information.

(b) Medium to light weight, symmetric fuel loading

(i) High lift devices retracted configuration:
Slow down at 1 knot/sec to automatic autopilot disengage, Stall Warning, or entry into speed protection function.

Recovery should be initiated a reasonable period after the onset of Stall Warning or other appropriate Warning.

The airplane should exhibit no hazardous characteristics.

(ii) Full Instrument Approach:

If the autopilot has the ability to fly a coupled instrument approach and go-around, it should demonstrate the following:

(A) Instrument approach using all normal flap selections.

(B) Go-around using all normal flap selections.

(C) Glideslope capture from above the glidepath.

(iii) If the airplane accretes or sheds ice asymmetrically, it should be possible to disengage the autopilot at any time without unacceptable out of trim forces.

(iv) General maneuverability, including normal turns, maximum angle of bank commanded by the FGS in one direction and then rapid reversal of command reference to the maximum FGS angle of bank in the other direction.

5. FAILURE CONDITIONS

This section contains criteria relating to airplane system Failure Conditions identified for validation by a system Safety Assessment.

a. Test Methods

(1) General. The test method for most Failure Conditions will require some type of fault simulation technique with controls that provide for controlled insertion and removal of the type of fault identified as vulnerability. The insertion point will typically be at a major control or guidance point on the airplane (e.g., control surface command, guidance command, thrust command).

(2) Assessment of Failure Conditions. The implication of the effect of the Failure Condition on various flight phases should be assessed and the demonstration condition established. This assessment should identify the parameters that need to be measured and the instrumentation required.

The role of any monitoring and alerting in the evaluation should be identified.

The alertness of the crew to certain airplane response cues may vary with phase of flight and other considerations. Guidance on this is provided in the following sections.

The 'success criteria' or operational implications should be identified and agreed with the regulatory authority prior to the conduct of the test. Guidance on this is provided in the following sections.

b. Fault Recognition and Pilot Action

(1) Safety Assessment. The Safety Assessment process may identify a vulnerability to these types of Failure Condition: hardover, slowover, and oscillatory. The various types of effect will cause differing response in the airplane and resultant motion and other cues to the flightcrew to alert them to the condition. The flightcrew attention may be gained by additional alerting provided by systems on the airplane. The recognition is then followed by appropriate action including recovery.

The assessment of the acceptability of the Failure Condition and the validation of the Safety Assessment assumptions are complete when a stable state is reached as determined by the test pilot.

The following paragraphs provide guidance for specific phases of flight.

(2) Takeoff. This material addresses the use of a FGS after rotation for takeoff. Chapter 15 identified the key considerations for this phase of flight to be the effect on the net flight path and the speed control after liftoff. Automatic control is not typically provided for the takeoff roll. It may however be selected soon after liftoff. Failure Conditions may be introduced with this engagement.

For the initial liftoff through flap retraction, it can be assumed that the flightcrew is closely monitoring the airplane movements and a maximum crew response time after recognition would be one second.

(3) Climb, Cruise, Descent and Holding and Maneuvering. The demonstration of applicable failure conditions during these phases of flight would include the potential for occupants to be out of their seats and moving about the cabin.

(4) Approach. There are two types of approach operations to consider—an approach with and one without vertical path reference. The approach with vertical path reference will be assessed against ground-based

criteria using a deviation profile assessment. A height loss assessment is used for approaches without vertical path reference.

(a) Fault Demonstration Process. The worst case malfunction has first to be determined, based on factors such as the following:

(i) Failure Conditions identified by the system safety assessment

(ii) System characteristics such as variations in authority or monitor operation

(iii) Mitigation provided by any system alerts

(iv) Aircraft flight characteristics relevant to failure recognition

Once the worst-case malfunction has been determined, flight tests of the worst-case malfunction should be flown in representative conditions (e.g. coupled to an ILS), with the malfunction being initiated at a safe height. The pilot should not initiate recovery from the malfunction until one second after the recognition point. The delay is intended to simulate the variability in response to effectively a "Hands off" condition. It is expected that the pilot will follow through on the controls until the recovery is initiated.

(b) Assessment of Approach with Vertical Path Reference. Figure D1 of this Appendix provides a depiction of the deviation profile method. The first step is to identify the deviation profile from the worst case malfunction. The next step is to 'slide' the deviation profile down the glidepath, until it is tangential to the 1:29 line or the runway. The Failure Condition contribution to the Minimum Use Height may be determined from the geometry of the aircraft wheel height determined by the deviation profile, relative to the 1:29 line intersecting a point 15 feet above the threshold. The method of determination maybe by graphical or by calculation.

NOTE: The Minimum Use Height is based on the recovery point for the following reasons:

- It is assumed that in service the pilot will be "Hands off" until the autopilot is disengaged at the Minimum Use Height in normal operation.
- The test technique assumes a worst case based on the pilot being "Hands off" from the point of malfunction initiation to the point of recovery.

- A failure occurring later in the approach than the point of initiation of the worst case malfunction described above is therefore assumed to be recovered earlier and in consequence to be less severe.

(c) Assessment of Approach without Vertical Path Reference. Figure D2 of this Appendix provides a depiction of the height loss method. A descent path of three degrees, with nominal approach speed, should be used unless the autopilot is to be approved for significantly steeper descents. The vertical height loss is determined by the deviation of the aircraft wheel height relative to the nominal wheel flight path.

c. Autopilot Override

(1) Initial Tests. The initial tests to demonstrate compliance should be accomplished at an intermediate altitude and airspeed, e.g., 15000 feet MSL and 250 knots. With the autopilot engaged in altitude hold, the pilot should apply a low force to the control wheel (or equivalent) and verify that the automatic trim system does not produce motion resulting in a hazardous condition. The pilot should then gradually increase the applied force to the control wheel (or equivalent) until the autopilot disengages. When the autopilot disengagement occurs, observe the transient response of the airplane. Verify that the transient response is in compliance with Chapter 10, Part D.

(a) Automatic Disengagement. Disengagement caused by flightcrew override should be verified by applying an input on the control wheel (or equivalent) to each axis for which the FGS is designed to disengage, i.e. the pitch and roll yoke, or the rudder pedals (if applicable). The inputs by the pilot should build up to a point where they are sharp and forceful, so that the FGS can immediately be disengaged for the flightcrew to assume manual control of the airplane.

(b) Non-automatic Disengagement. If the autopilot is designed such that it does not automatically disengage during an autopilot override—and instead provides a flight deck Alert to mitigate any potentially hazardous conditions—the timeliness and effectiveness of this Alert should be evaluated. The pilot should follow the evaluation procedure identified above until such time as an Alert is provided. At that time, the pilot should respond to the Alert in a responsive manner consistent with the level of the alert (i.e., a Caution, a Warning) and with the appropriate flightcrew procedure defined for that Alert. When the autopilot is manually disengaged, observe the transient response of the airplane and verify that the transient response is in compliance with Chapter 10, Part D.

NOTE: During hardover testing as described in AC 25-7A, Chapter 6 there will be several opportunities throughout the flight envelope to conduct these tests. The evaluation of the manual disconnects would include the forces required for an autopilot disengage, (not too light, but not too high,), the transients characteristics associated with each one (i.e., what type of motion and "g's" that are produced), and the Warnings that are generated.

(2) Repeated Test Conditions. After the initial tests have been successfully completed, the above tests should be repeated at higher altitudes and airspeeds until reaching M_{MO} at high cruise altitudes.

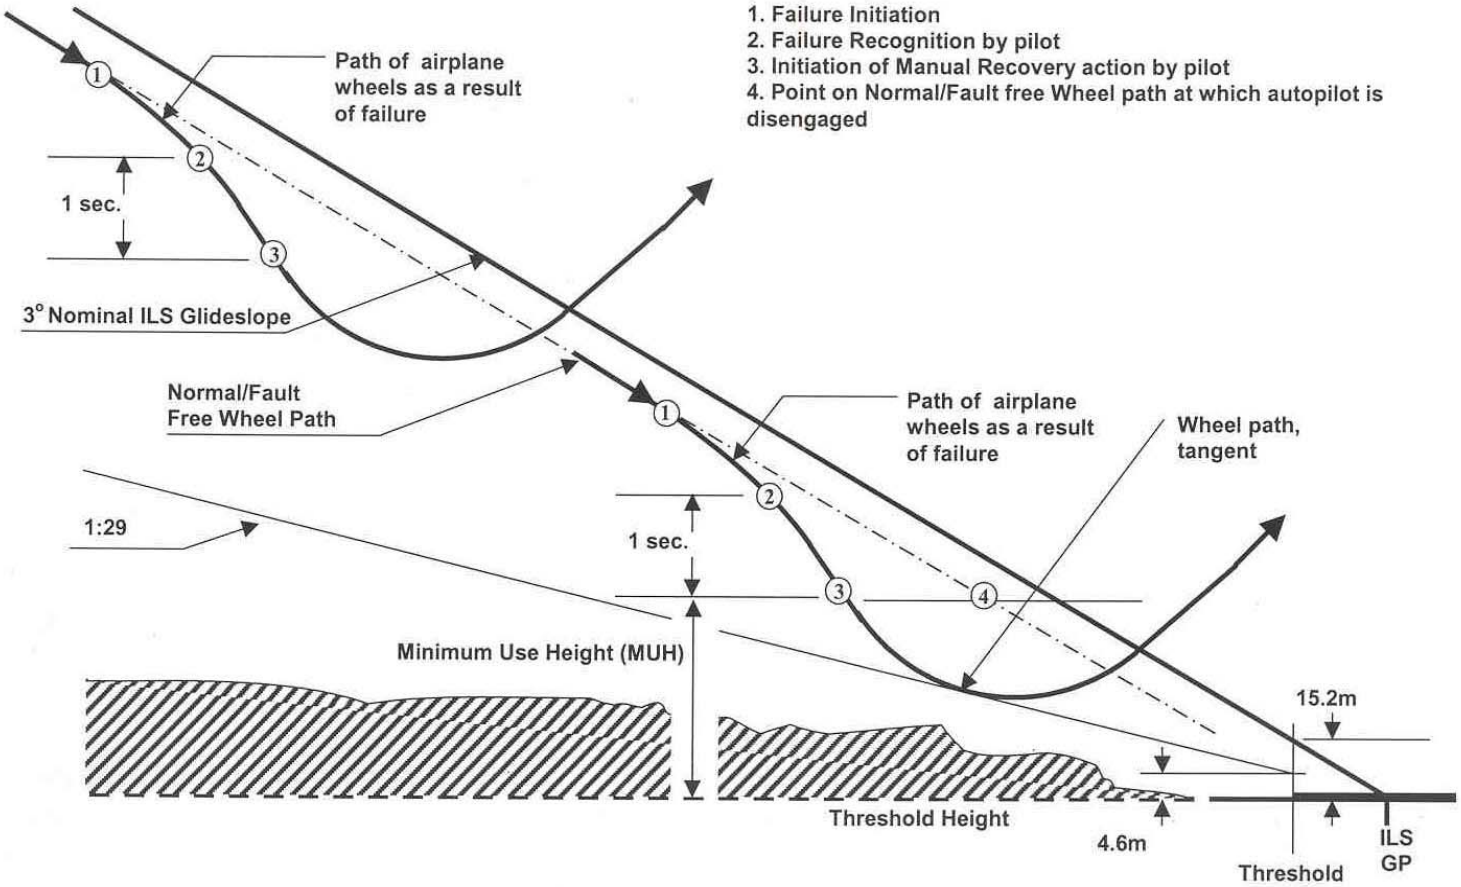

Figure D 1 Deviation Profile Method

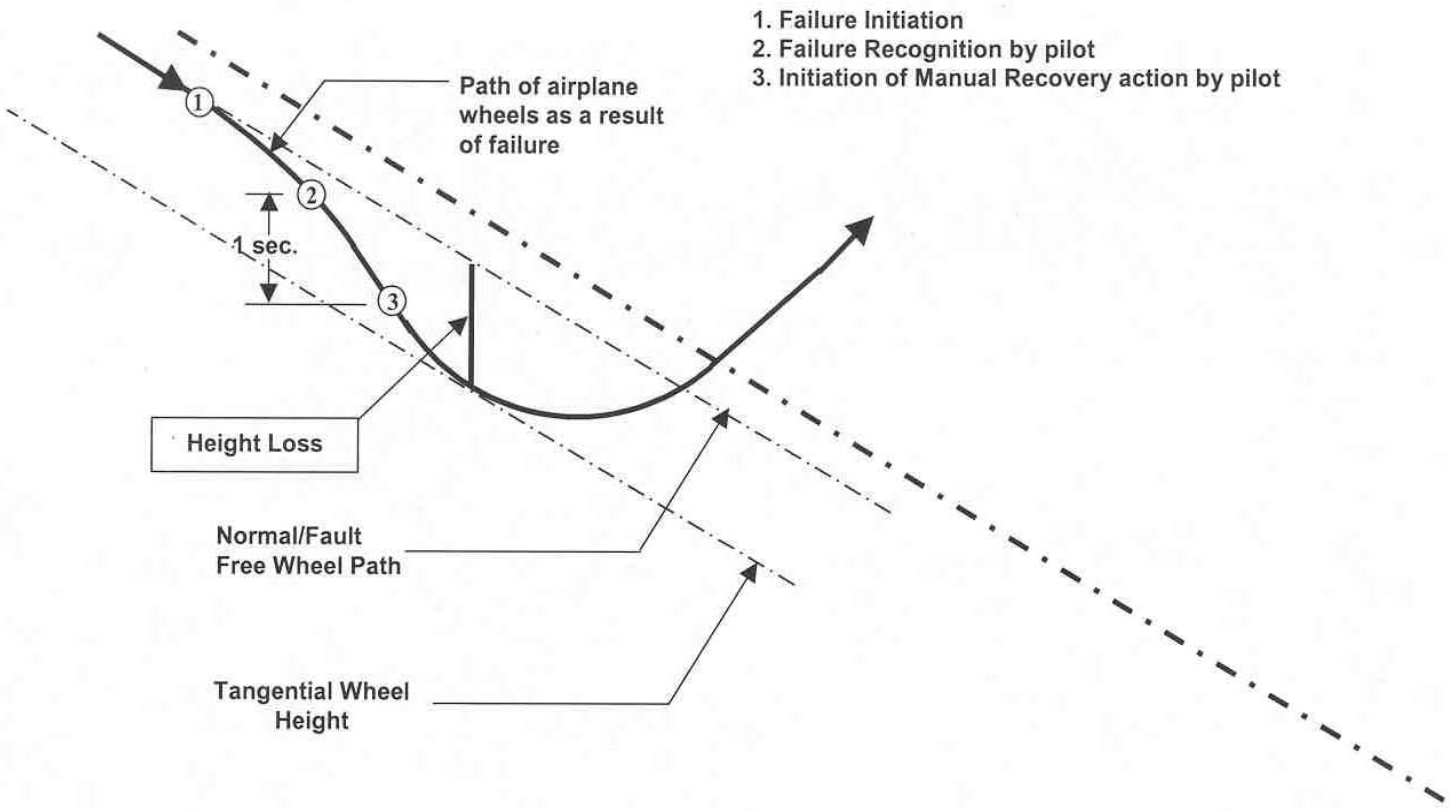

Figure D 2 Height Loss Method