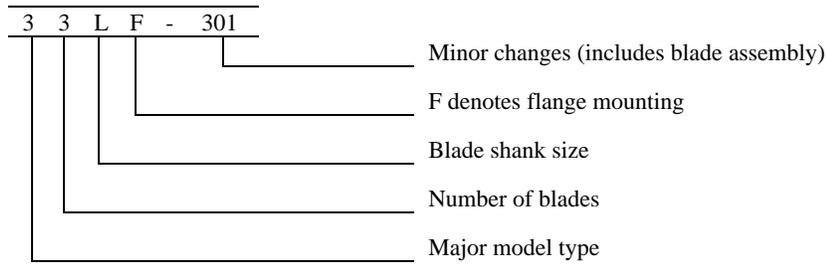
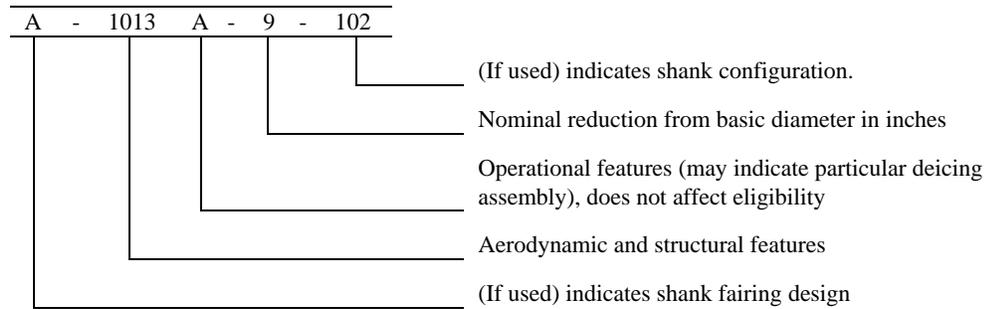


NOTE 1. Hub Model DesignationNOTE 2. Blade Model Designation

Diameter limits shown are nominal diameters of the assembled propeller and do not include the $\pm 1/8$ inch manufacturing tolerance permissible for propellers with basic diameter less than 14 feet or $\pm 1/4$ inch permissible for propellers with basic diameter 14 feet or larger.

NOTE 3. Pitch Control. Eligible with appropriate constant speed control.

NOTE 4. (1) Feathering. Full feathering eligible with appropriate feathering control.
 (2) Reversing. Full reversing eligible with appropriate reversing control.

NOTE 5. Left-Hand Models. The left-hand version of an approved propeller model is eligible at the same rating and diameter limitations as listed for the right-hand model.

NOTE 6. Interchangeable Blades. Not applicable.

NOTE 7. Accessories.

- (a) Propeller Deicing. Eligible with Hamilton Standard electrical deicing system installed in accordance with the propeller manufacturer's instructions.
 (b) Propeller Spinner. Eligible with spinner supplied by Hamilton Standard.

NOTE 8. Shank Fairings. Not applicable.

NOTE 9. Special Limits. Not applicable.

NOTE 10. Special Notes. The word "eligible" as used herein does not signify approval. For approval, compliance with the applicable aircraft airworthiness requirements is necessary.

....END....