


NOTE 2.

Blade Model Designation

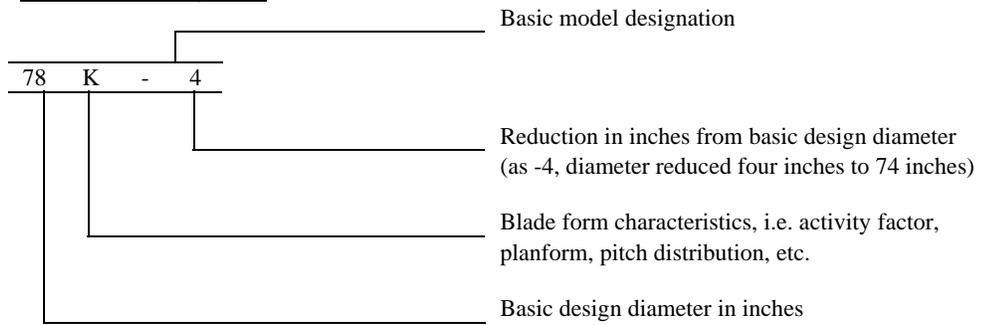

NOTE 3. Pitch controls Eligible. Engine mounted two-way valve, covered by D-1802 installation assembly drawing.

NOTE 4. Not applicable.

NOTE 5. Left-Hand Models. The left-hand version of an approved model is eligible at the same rating and diameter limitations as listed for the right-hand model.

NOTE 6, 7, and 8. Not applicable.

NOTE 9.

Table of Propeller-Engine Combinations
Approved Vibrationwise for Use on Single-Engine Tractor Aircraft

The maximum and minimum propeller diameters that can be used from a vibration standpoint are shown below. No reduction below the minimum diameter listed is permissible since this figure includes the diameter reduction allowable for repair purposes.

<u>Blade Model</u>	<u>Engine Model</u>	<u>Max. Dia. (Inches)</u>	<u>(Min. Dia. (Inches)</u>	<u>Placards</u>
78K	Continental C-145-2H	78	72	None
78K	Continental O-300-B	78	72	None

NOTE 10. The word "eligible" as used herein does not signify approval For approval, compliance with the applicable aircraft airworthiness requirements is necessary.

...END....