




NOTE 2. Model Designation.

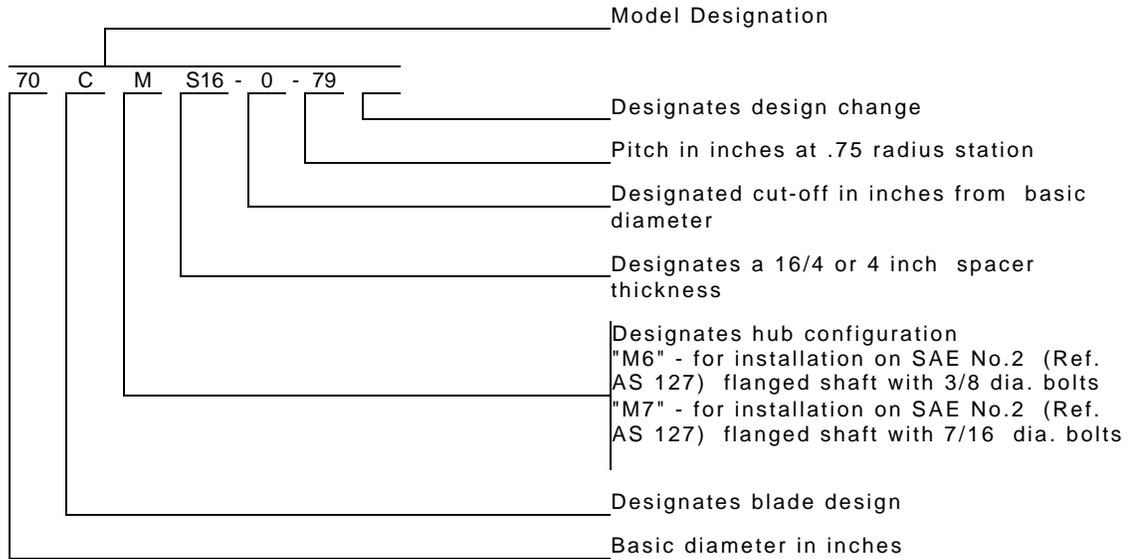

NOTE 3, 4, 5, 6, and 8. Not applicable.

NOTE 7. Spacers. Sensenich spacer models are identified by flange codes (see NOTE 2) and spacer thickness designated based on multiples of 1/4 inch. See NOTE 9 for approved spacer lengths.

NOTE 9. Special Limits. Table of Propeller-Engine Combinations  
Approved Vibrationwise for Use on Normal Category Single-Engine Tractor Aircraft

The maximum and minimum propeller diameters that can be used from a vibration standpoint are shown below. No reduction below the minimum diameter listed is permissible since this figure includes the diameter reduction allowable for repair purposes.

Propeller Model	Engine Model	Max. Dia. (Inches)	Min. Dia. (Inches)	Placards
70CM6, 70CM7 Spacers 0 to 4 inches incl.	Textron Lycoming O-320 Series 160h.p. @ 2600r.p.m. or less.	70	68	No operation above 2600 r.p.m.

NOTE 10. Special Notes. The work "eligible" as used herein does not signify approval. For approval, compliance with the applicable aircraft airworthiness requirements is necessary.

... END ...