

Fuel capacity	<u>*USABLE FUEL</u>	<u>U.S. GALS.</u>	<u>IMPERIAL GALS.</u>	
	Forward Tank (+162.5 in.)	176	147	
	Rear Tank (+240.0 in.)	<u>182</u>	<u>152</u>	
	TOTAL	358	299	
	<i>*See NOTE 1(b) for Weight and Balance.</i>			
Oil capacity	<u>*USABLE OIL</u>	<u>U.S. GALS.</u>	<u>IMPERIAL GALS.</u>	<u>WEIGHT LB.</u>
	Port (+177.0 in.)	1.5	1.2	11
	Starboard (+177.0 in.)	<u>1.5</u>	<u>1.2</u>	<u>11</u>
	TOTAL	3.0	2.4	22
	<i>* See NOTE 1(c) for Weight and Balance.</i>			
Maximum Operating Altitude	25000 ft. (when supplementary breathing equipment is provided for all occupants).			
Control surface movements	<p>Aileron (with flaps up) Up 17.5° Down 16° (with flaps in landing position) Up 25° Down 17.5°</p> <p>Trim Tab - or + 15°</p> <p>Geared Tab (flap up) Up 16° Down 17.5°</p> <p>Flaps (inboard forward) 0° to 40° (inboard trailing) 0° to 62.5° (outboard forward) 0° to 26° (outboard trailing) (aileron)</p> <p>Elevator Up 25° Down 16°</p> <p>Tab Up 20° Down 25°</p> <p>Flap interconnect (flap up) Down 12° (flaps landing) Up 12°</p> <p>Rudder Left 20° Right 21°</p> <p>Geared Tab - or + 11°</p> <p>Trim Tab - or + 25°</p>			
	See Maintenance Manual PSM-1-6-2 for procedure to rig control surface movements from stop to stop.			
Serial Nos. eligible	1 to 5 inclusive. The Canadian Department of Transport Certificate of Airworthiness for export endorsed as noted under "Import Eligibility" must be submitted for each individual aircraft for which application for certification is made.			
Import eligibility	A U.S. Airworthiness Certificate may be issued on the basis of the Canadian Department of Transport "Certificate of Airworthiness for Export" signed by or for the Minister of Transport. This form must contain the following statement: "This certifies that the aircraft described below has been manufactured in conformity with data forming the basis for D.O.T. Type Approval No. A-82, Issue 2, dated July 29, 1966. (FAA Type Certificate No. A9EA)."			
Certification basis	CAR 3 dated May 15, 1956 and Amendments 3-1 to 3-8 inclusive, plus Special Conditions for Multi-Engine Turbine Powered Aircraft dated November 6, 1964. Type Certificate No. A9EA issued June 22, 1966. Not approved for use in operations under FAR Part 135 after May 31, 1972, when FAR 135.144 becomes mandatory. (See NOTE 3). Date of application for Type Certificate April 2, 1964.			
Equipment	<p>The basic required equipment as prescribed in the applicable airworthiness regulations (see Certification Basis) must be installed in the aircraft for certification and is given in Viking Air Limited (or Bombardier) Report A.E.R.O.C. 6.6.G.1. In addition, the following item of equipment is required:</p> <p>(a) Canadian D.O.T. approved Airplane Flight Manual, PSM-1-61-1A.</p>			


II - Model DHC-6-100 (Normal Category), Approved August 1, 1966 by the FAA and July 29, 1966 by the Canadian Department of Transport (DOT), (First Production Series)

Engines	2 United Aircraft of Canada, Limited PT6A-20				
Fuel	MIL-J-5624E, Grades JP-1, JP-4, JP-5, or Arctic Diesel Fuel to UACL Specification CPW 46. (MIL-G-5572C Avgas (all grades) for emergency use only limited to 150 hours use in any one overhaul cycle.)				
Oil	Synthetic types conforming to CPWA 202, latest issue, (UACL PT6 Engine Service Bulletin No. 1 lists approved brand oils.)				
Engine rating	<u>RATING</u>	<u>E.S.H.P.</u>	<u>S.H.P.</u>		
	Take-off (5 min.)	*579	*550		
	Max. continuous	*579	*550		
	*Available to 70°F (21°C) Ambient Temperature				
Engine limits	Temperature Limits (Inter-Turbine)				
	Take-off	1380°F	(750°C)		
	Max. Continuous	1380°F	(750°C)		
	Starting (2 sec.)	1994°F	(1090°C)		
	Torque Limits				
	Take-off	42.5 p.s.i.	(1315 ft.-lb.)		
	Max. Continuous	42.5 p.s.i.	(1315 ft.-lb.)		
	Gas Generator				
	Take-off	38,100 r.p.m.	(101.5%)		
	Max. Continuous	38,100 r.p.m.	(101.5%)		
	Oil Temperature				
	Starting	-40°C Min.			
	Take-off	10°C to 99°C			
	Max. Continuous	10°C to 99°C			
	Oil Pressure				
	Normal (28,000 r.p.m. & above)	65 to 85 p.s.i.g.			
	Min. (below 28,000 r.p.m.)	40 p.s.i.g.			
Propeller	Hartzell				
	Hub	HC-B3TN-3, -3B, -3BY			
	Blades	T10173+1, T10173E+1			
	Diameter	8 ft. 6 in. nominal (8 ft. 4 in. minimum after repairs)			
	Pitch Settings at 30" Station				
	Feather	+87°			
	Take-off Low Pitch	+16°			
	Idle Blade Angle	+12°			
	Reverse Blade Angle	-14°			
Propeller limits	Propeller (Np) - Take-off	2200 r.p.m. (100%)			
	Max. Continuous	2200 r.p.m. (100%)			
Airspeed limits (CAS)		<u>Landplane</u>		<u>Skiplane & Floatplane</u>	
		<u>M.P.H.</u>	<u>Knots</u>	<u>M.P.H.</u>	<u>Knots</u>
	V _{ne} (Never exceed)	232.7*	202*	210.8*	183*
	V _{no} (Max. structural cruising)	184.3**	160**	184.3**	160**
	V _p (Maneuvering)	149.8***	130***	149.8***	130***
	V _{mc} (Minimum control)	73.7	64	73.7	64
	V _{fe} (Flaps extended)	115.2	100	115.2	100
	0° to 20°				
	V _{fe} (Flaps extended)	97.9	85	97.9	85
	20° to 40°				
	*Reduce V _{ne} 4.6 mph (4K) per 1000 ft. above 10000 ft.				
	**Reduce V _{no} 3.5 mph (3K) per 1000 ft. above 10000 ft.				
	***Reduce V _p - V _{no} above 20000 ft.				

C.G. range (Landing gear fixed)


Without Mod. 6/1020 - Same as Model 1
With Mod. 6/1020 - "Fuselage Beam, Front Wing Spar Reinforcing"

LANDPLANE

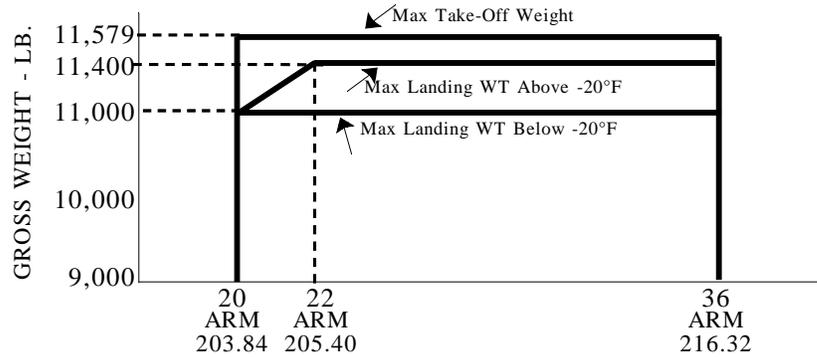

HORIZONTAL C.G. LIMIT - % MAC

SKIPLANE

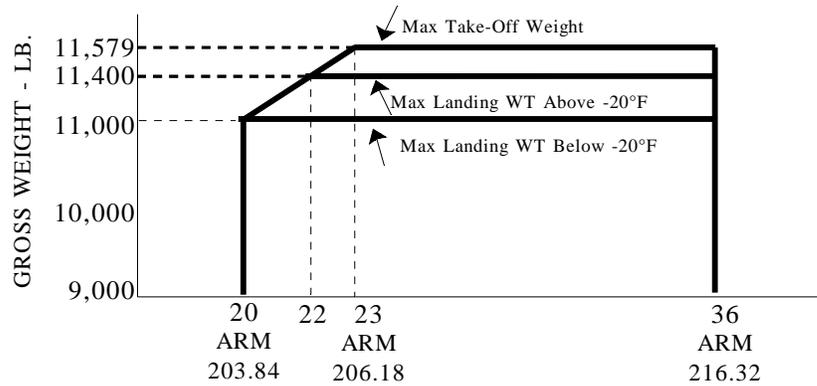

FLOATPLANE

Forward Limit 25% M.A.C. (STA. 207.74) at all weights up to max. of 11,600 lb.
 Aft Limit 32% M.A.C. (STA. 213.20) at all weights up to max. of 11,600 lb.

Empty weight C.G. range

None

Maximum weights

With Mod. 6/1020 - "Fuselage Beam, Front Wing Spar Reinforcing"

	<u>Landplane (lb.)</u>	<u>Skiplane (lb.)</u> <u>(With Item 201(a)&(b))</u>	<u>Floatplane (lb.)</u> <u>(With Item 202(a)&(b))</u>
Take-off	11579	11579	11600
Landing	11400*	11400*	11600

*See NOTE 5 - Temperature Limitations
 Without Mod. 6/1020 - Same as Model 1.

Minimum Crew

One (pilot). (+95.0 in.)

No. of seats

21 (including two at Stn. +95.0 in.) - Limited by approved seating arrangement. (See Weight and Balance Handbook).

Max. 24 (including two at Stn. +95.0 in.) - Limited by emergency exit requirements. (Approval of seating arrangement is required).

Cargo loading limitations	See Weight and Balance Handbook PSM 1-6-8																																													
Maximum baggage	200 lb. max. in forward compartment (arm +41.0 in.) 500 lb. max. in rear compartment (arm +354.0 in.) See Weight and Balance Handbook.																																													
Fuel capacity	<table border="0"> <thead> <tr> <th><u>*USABLE FUEL</u></th> <th><u>U.S. GAL.</u></th> <th><u>IMPERIAL GAL.</u></th> </tr> </thead> <tbody> <tr> <td>Forward Tank (+162.5 in.)</td> <td>181</td> <td>151</td> </tr> <tr> <td>Rear Tank (+240.0 in.)</td> <td><u>197</u></td> <td><u>164</u></td> </tr> <tr> <td>TOTAL</td> <td>378</td> <td>315</td> </tr> </tbody> </table> <p><i>*See NOTE 1(b) for Weight and Balance.</i></p>	<u>*USABLE FUEL</u>	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>	Forward Tank (+162.5 in.)	181	151	Rear Tank (+240.0 in.)	<u>197</u>	<u>164</u>	TOTAL	378	315																																	
<u>*USABLE FUEL</u>	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>																																												
Forward Tank (+162.5 in.)	181	151																																												
Rear Tank (+240.0 in.)	<u>197</u>	<u>164</u>																																												
TOTAL	378	315																																												
Oil capacity	<table border="0"> <thead> <tr> <th><u>**USABLE OIL</u></th> <th><u>U.S. GAL.</u></th> <th><u>IMPERIAL GAL.</u></th> <th><u>WEIGHT LB.</u></th> </tr> </thead> <tbody> <tr> <td>Port (+177.0 in.)</td> <td>1.5</td> <td>11.2</td> <td>11</td> </tr> <tr> <td>Starboard (+177.0 in.)</td> <td><u>1.5</u></td> <td><u>1.2</u></td> <td><u>11</u></td> </tr> <tr> <td>TOTAL</td> <td>3.0</td> <td>2.4</td> <td>22</td> </tr> </tbody> </table> <p><i>** See NOTE 1(c) for Weight and Balance.</i></p>	<u>**USABLE OIL</u>	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>	<u>WEIGHT LB.</u>	Port (+177.0 in.)	1.5	11.2	11	Starboard (+177.0 in.)	<u>1.5</u>	<u>1.2</u>	<u>11</u>	TOTAL	3.0	2.4	22																													
<u>**USABLE OIL</u>	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>	<u>WEIGHT LB.</u>																																											
Port (+177.0 in.)	1.5	11.2	11																																											
Starboard (+177.0 in.)	<u>1.5</u>	<u>1.2</u>	<u>11</u>																																											
TOTAL	3.0	2.4	22																																											
Maximum Operating Altitude	25000 ft. (when supplementary breathing equipment is provided for all occupants).																																													
Control surface movements	<table border="0"> <tbody> <tr> <td>Aileron (with flaps up)</td> <td>Up 17.5°</td> <td>Down 16°</td> </tr> <tr> <td>(with flaps in landing position)</td> <td>Up 25°</td> <td>Down 17.5°</td> </tr> <tr> <td>Trim Tab</td> <td>- or + 15°</td> <td></td> </tr> <tr> <td>Geared Tab (flap up)</td> <td>Up 16°</td> <td>Down 17.5°</td> </tr> <tr> <td>Flaps (inboard forward)</td> <td>0° to 40°</td> <td></td> </tr> <tr> <td>(inboard trailing)</td> <td>0° to 62.5°</td> <td></td> </tr> <tr> <td>(outboard forward)</td> <td>0° to 26°</td> <td></td> </tr> <tr> <td>(outboard trailing)</td> <td>(aileron)</td> <td></td> </tr> <tr> <td>Elevator</td> <td>Up 25°</td> <td>Down 16°</td> </tr> <tr> <td>Tab</td> <td>Up 20°</td> <td>Down 25°</td> </tr> <tr> <td>Flap interconnect (flap up)</td> <td></td> <td>Down 12°</td> </tr> <tr> <td>(flap landing)</td> <td>Up 12°</td> <td></td> </tr> <tr> <td>Rudder</td> <td>Left 20°</td> <td>Right 21° *</td> </tr> <tr> <td>Geared Tab</td> <td>- or + 11°</td> <td></td> </tr> <tr> <td>Trim Tab</td> <td>- or + 25°</td> <td></td> </tr> </tbody> </table> <p>See Maintenance Manual Part No. PSM-1-6-2 for procedure to rig control surface movements from stop to stop.</p> <p><i>*When Item 202(b) is incorporated then the rudder travel limits are: Left 17° Right 21°.</i></p>	Aileron (with flaps up)	Up 17.5°	Down 16°	(with flaps in landing position)	Up 25°	Down 17.5°	Trim Tab	- or + 15°		Geared Tab (flap up)	Up 16°	Down 17.5°	Flaps (inboard forward)	0° to 40°		(inboard trailing)	0° to 62.5°		(outboard forward)	0° to 26°		(outboard trailing)	(aileron)		Elevator	Up 25°	Down 16°	Tab	Up 20°	Down 25°	Flap interconnect (flap up)		Down 12°	(flap landing)	Up 12°		Rudder	Left 20°	Right 21° *	Geared Tab	- or + 11°		Trim Tab	- or + 25°	
Aileron (with flaps up)	Up 17.5°	Down 16°																																												
(with flaps in landing position)	Up 25°	Down 17.5°																																												
Trim Tab	- or + 15°																																													
Geared Tab (flap up)	Up 16°	Down 17.5°																																												
Flaps (inboard forward)	0° to 40°																																													
(inboard trailing)	0° to 62.5°																																													
(outboard forward)	0° to 26°																																													
(outboard trailing)	(aileron)																																													
Elevator	Up 25°	Down 16°																																												
Tab	Up 20°	Down 25°																																												
Flap interconnect (flap up)		Down 12°																																												
(flap landing)	Up 12°																																													
Rudder	Left 20°	Right 21° *																																												
Geared Tab	- or + 11°																																													
Trim Tab	- or + 25°																																													
Serial Nos. eligible	6 to 115 inclusive. The Canadian Department of Transport Certificate of Airworthiness for export endorsed as noted under "Import Eligibility" must be submitted for each individual aircraft for which application for certification is made.																																													
Import eligibility	A U.S. Airworthiness Certificate may be issued on the basis of the Canadian Department of Transport "Certificate of Airworthiness for Export" signed by or for the Minister of Transport. This form must contain the following statement: "This certifies that the aircraft described below has been manufactured in conformity with data forming the basis for D.O.T. Type Approval No. A-82, Issue 3, dated June 12, 1967. (FAA Type Certificate No. A9EA)."																																													
Certification basis	CAR 3 dated May 15, 1956 and Amendments 3-1 to 3-8 inclusive, plus Special Conditions for Multi-Engine Turbine Powered Aircraft dated November 6, 1964. Type Certificate No. A9EA issued June 22, 1966. Date of application for Type Certificate April 2, 1964.																																													
	For this Model airplane intended for use in operations under FAR Part 135, the additional airworthiness requirements of Special Federal Aviation Regulation (SFAR) 23, dated January 7, 1969, and Amendment 1 to SFAR 23, dated December 24, 1969, are also included. See NOTES 3 and 8.																																													

Equipment The basic required equipment as prescribed in the applicable airworthiness regulations (see Certification Basis) must be installed in the aircraft for certification and is given in Viking Air Limited (or Bombardier) Report A.E.R.O.C. 6.6.G.1. In addition, the following item of equipment is required:

- (a) Canadian D.O.T. approved Airplane Flight Manual, Part No. PSM-1-61-1A.

III - Model DHC-6-200 (Normal Category), Approved April 1, 1968 by the FAA and March 29, 1968 by the Canadian Department of Transport (DOT).

This Series may be identified by:

- (1) Aircraft nose configuration, See NOTE 6 for optional VAL (or BI) Mod. 6/1077 - Extended Nose that Increases the Volume and Weight Capacity of the Forward Baggage Compartment; and,
 (2) VAL (or BI) Mod. 6/1075 (Retrofit) or 6/1076 (New Production) -Increase in the Volume of the Rear Baggage Compartment.

Engines 2 United Aircraft of Canada, Limited PT6A-20

Fuel MIL-J-5624E, Grades JP-1, JP-4, JP-5, or Arctic Diesel Fuel to UACL Specification CPW 46. (MIL-G-5572C Avgas (all grades) for emergency use only limited to 150 hours use in any one overhaul cycle.)

Oil Synthetic types conforming to CPWA 202, latest issue, (UACL PT6 Engine Service Bulletin No. 1 lists approved brand oils.)

Engine rating

<u>RATING</u>	<u>E.S.H.P.</u>	<u>S.H.P.</u>
Take-off (5 min.)	*579	*550
Max. continuous	*579	*550

**Available to 70°F (21°C) Ambient Temperature*

Engine limits

Temperature Limits (Inter-Turbine)

Take-off	1380° F	(750° C)
Max. Continuous	1380°F	(750° C)
Starting (2 sec.)	1994°F	(1090° C)

Torque Limits

Take-off	42.5 p.s.i. (1315 ft.-lb.)
Max. Continuous	42.5 p.s.i. (1315 ft.-lb.)

Gas Generator

Take-off	38,100 r.p.m. (101.5%)
Max. Continuous	38,100 r.p.m. (101.5%)

Oil Temperature

Starting	-40°C Min.
Take-off	10°C to 99°C
Max. Continuous	10°C to 99°C

Oil Pressure

Normal	(28,000 r.p.m. & above)	65 to 85 p.s.i.g.
Min.	(below 28,000 r.p.m.)	40 p.s.i.g.

Propeller Hartzell

Hub	HC-B3TN-3, -3B, -3BY
Blades	T10173+1, T10173E+1
Diameter	8 ft. 6 in. nominal
	(8 ft. 4 in. after repairs)

Pitch Settings at 30" Station



Feather	+87°
Take-off Low Pitch	+16°
Idle Blade Angle	+12°
Reverse Blade Angle	-14°

Propeller limits Propeller (Np) - Take-off 2200 r.p.m. (100%)
 Max. Continuous 2200 r.p.m. (100%)

Airspeed Limits (CAS)	<u>Landplane</u>		<u>Skiplane</u>		<u>Floatplane</u>	
	<u>Knots</u>	<u>M.P.H.</u>	<u>Knots</u>	<u>M.P.H.</u>	<u>Knots</u>	<u>M.P.H.</u>
Vne (never exceed)	202*	232.7*	183*	211*	183*	211*
Vno (max. structural cruising)	160**	184.3**	160**	184.3**	160**	184.3**
Vp (design maneuvering)	130***	149.8***	130***	149.8***	130***	149.8***
Vmc (minimum control)	68	78.3	68	78.3	64	78.3
Vfe (flaps extended) 0° to 20°	100	115.2	100	115.2	100	115.2
Vfe (flaps extended) 20° to 40°	85	97.9	85	97.9	85	97.9

*Reduce Vne 4.6 m.p.h. (4K) per 1000 ft. above 10000 ft.
 **Reduce Vno 3.5 m.p.h. (3K) per 1000 ft. above 10000 ft.
 ***Reduce Vp - Vno above 20000 ft.

C.G. range (Landing gear fixed) With Mod. 6/1020 - "Fuselage Beam, Front Wing Spar Reinforcing"
 (All Model DHC-6-200 Aircraft Serial Nos. 116 to 230 inclusive have this Mod. embodied).

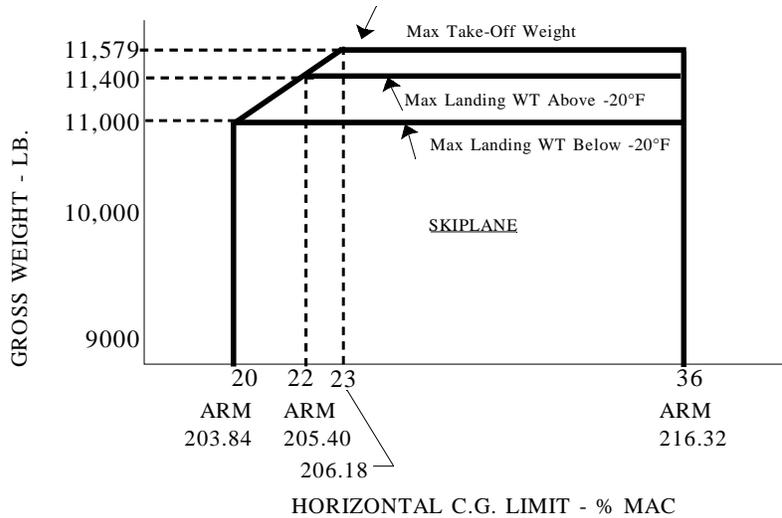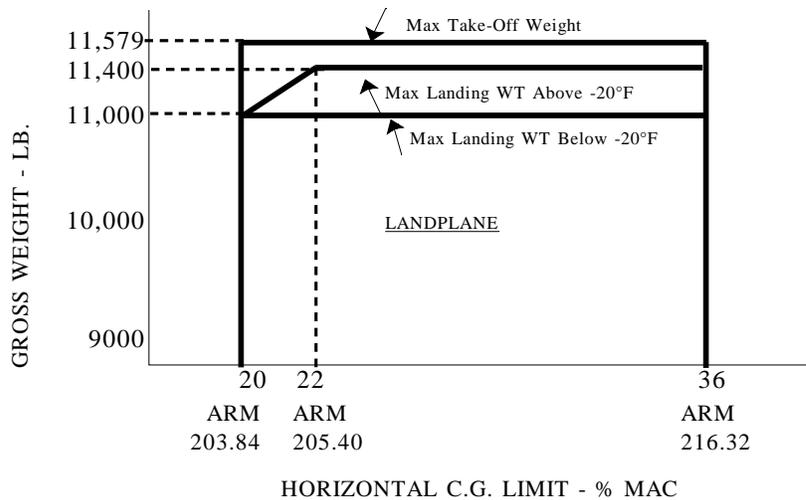

Floatplane Forward Limit 25% M.A.C. (STA. 207.74) at all weights up to max. of 11,600 lb.
 Aft Limit 32% M.A.C. (STA. 213.20) at all weights up to max. OF 11,600 lb.

Empty weight C.G. range	None		
	<u>Landplane (lb.)</u>	<u>Skiplane (lb.)</u> (With Item 201(a)&(b))	<u>Floatplane (lb.)</u> (With Item 202(a)&(b))
Take-off	11579	11579	11600
Landing	11400*	11400*	11600
	*See NOTE 5 - Temperature Limitations		
Minimum Crew	One (pilot). (+95.0 in.)		
No. of seats	21 (including two at Stn. +95.0 in.) - Limited by approved seating arrangement. (See Weight and Balance Handbook).		
	Max. 24 (including two at Stn. +95.0 in.) - Limited by emergency exit requirements. (Approval of seating arrangement is required).		
Cargo loading limitations	See Weight and Balance Handbook (PSM 1-6-8)		
Maximum baggage	Forward - Short Nose Forward - Long Nose (Mod. 6/1077)	(+ 41.0 in.) (+25.0 in.)	200 lb. Max. 300 lb. Max.
	Rear Rear Extension	(+354.0 in.) (+391.0 in.)	500 lb. Max.* 50 lb. Max.*
	*Total Rear + Rear Extension not to exceed 500 lb. maximum.		
Fuel capacity	<u>*USABLE FUEL</u>	<u>U.S. GALS.</u>	<u>IMPERIAL GALS.</u>
	Forward Tank (+162.5 in.)	181	151
	Rear Tank (+240.0 in.)	<u>197</u>	<u>164</u>
	TOTAL	378	315
	*See NOTE 1(b) for Weight and Balance.		
Oil capacity	<u>**USABLE OIL</u>	<u>U.S. GALS.</u>	<u>IMPERIAL GALS.</u> <u>WEIGHT LB.</u>
	Port (+177.0 in.)	1.5	1.2 11
	Starboard (+177.0 in.)	<u>1.5</u>	<u>1.2</u> <u>11</u>
	TOTAL	3.0	2.4 22
	** See NOTE 1(c) for Weight and Balance.		
Maximum Operating Altitude	25000 ft. (when supplementary breathing equipment is provided for all occupants).		
Control surface movements	Aileron (with flaps up) (with flaps in landing position)	Up 17.5° Down 16° Up 25° Down 17.5°	
	Trim Tab	+ or -15°	
	Geared Tab (flap up)	Up 16° Down 17.5°	
	Flaps (inboard forward)	0° to 40°	
	(inboard trailing)	0° to 62.5°	
	(outboard forward)	0° to 26°	
	(outboard trailing)	(aileron)	
	Elevator	Up 25° Down 16°	
	Tab	Up 20° Down 25°	
	Flap interconnect (flap up)	Down 12°	
	(flap landing)	Up 12°	
	Rudder (Skiplane)	Left 20° Right 21° * Left 18° Right 21°	
	Geared Tab	+ or -11°	
	Trim Tab	+ or -25°	
	See Maintenance Manual Part No. PSM-1-6-2 for procedure to rig control surface movements from stop to stop.		
	* When Item 202(b) is incorporated then the rudder travel limits are: Left 17° Right 21°.		

Serial Nos. eligible	<p>116 to 230 inclusive (except 130 and 210) plus any other Series aircraft that has been modified to embody the following significant Model</p> <p>Mod. 6/1020, 1075 or 1076, 1077.</p> <p>The Canadian Department of Transport Certificate of Airworthiness for export endorsed as noted under "Import Eligibility" must be submitted for each individual aircraft for which application for certification is made.</p>
Import eligibility	<p>A U.S. Airworthiness Certificate may be issued on the basis of the Canadian Department of Transport "Certificate of Airworthiness for Export" signed by or for the Minister of Transport. This form must contain the following statement: "This certifies that the aircraft described below has been manufactured in conformity with data forming the basis for D.O.T. Type Approval No. A-82, Issue 4, dated December 20, 1968 (FAA Type Certificate No. A9EA)."</p>
Certification basis	<p>CAR 3 dated May 15, 1956 and Amendments 3-1 to 3-8 inclusive, plus Special Conditions for Multi-Engine Turbine Powered Aircraft dated November 6, 1964. Type Certificate No. A9EA issued June 22, 1966. Date of application for Type Certificate April 2, 1964.</p> <p>For this Model airplane intended for use in operations under FAR Part 135, the additional airworthiness requirements of Special Federal Aviation Regulation (SFAR) 23, dated January 7, 1969, and Amendment 1 to SFAR 23, dated December 24, 1969, are also included. See NOTES 3 and 8.</p>
Equipment	<p>The basic required equipment as prescribed in the applicable airworthiness regulations (see Certification Basis) must be installed in the aircraft for certification and is given in Viking Air Limited (or Bombardier) Report A.E.R.O.C. 6.6.G.1. In addition, the following item of equipment is required:</p> <p>(a) Canadian D.O.T. approved Airplane Flight Manual, PSM-1-62-1A.</p>

IV - Model DHC-6-300 (Normal Category), Approved May 8, 1969 by the FAA and April 25, 1969 by the Canadian Department of Transport (DOT).

	<p>This is the third production series of the Type DHC-6. This series is identified primarily on basis of:</p> <ol style="list-style-type: none"> (1) PT6A-27 engine in place of -20 engine; (2) Increase in All-Up-Weight to the maximum allowed by CAR 3 of 12,500 lb.: (3) Addition of two forward exits and deletion of roof exit; and, (4) Aircraft nose configuration, See NOTE 6 for optional VAL (or BI) Mod. 6/1077 - Extended Nose that Increases the Volume and Weight Capacity of the Forward Baggage Compartment. 									
Engines	2 United Aircraft of Canada, Limited PT6A-27									
Fuel	<p>MIL-J-5624E, Grades JP-1, JP-4, JP-5, or Arctic Diesel Fuel to UACL Specification CPW 46.</p> <p>(MIL-G-5572C Avgas (all grades) for emergency use only - limited to 150 hours use in any one overhaul cycle.)</p>									
Oil	<p>Synthetic types conforming to CPWA 202, latest issue.</p> <p>(UACL PT6 Engine Service Bulletin No. 1 lists approved brand oils.)</p>									
Engine rating	<table border="0"> <tr> <td style="text-align: center;"><u>RATING</u></td> <td style="text-align: center;"><u>E.S.H.P.</u></td> <td style="text-align: center;"><u>S.H.P.</u></td> </tr> <tr> <td>Take-off</td> <td style="text-align: center;">652*</td> <td style="text-align: center;">620*</td> </tr> <tr> <td>Max. continuous</td> <td style="text-align: center;">652*</td> <td style="text-align: center;">620*</td> </tr> </table>	<u>RATING</u>	<u>E.S.H.P.</u>	<u>S.H.P.</u>	Take-off	652*	620*	Max. continuous	652*	620*
<u>RATING</u>	<u>E.S.H.P.</u>	<u>S.H.P.</u>								
Take-off	652*	620*								
Max. continuous	652*	620*								

*Available to 91°F (33°C) Ambient Temperature (S.L.)

Engine limits

Temperature Limits (Inter-Turbine)

Take-off	1336°F (725° C)
Max. Continuous	1336°F (725° C)
Starting (2 sec.)	1994°F (1090° C)

Torque Limits

Take-off	50 p.s.i. (1536 ft.-lb.)
Max. Continuous	50 p.s.i. (1536 ft.-lb.)

Gas Generator

Take-off	38,100 r.p.m. (101.5%)
Max. Continuous	38,100 r.p.m. (101.5%)

Oil Temperature

Starting	-40°C Minimum
Take-off	10°C to 99°C
Max. Continuous	10°C to 99°C
5 Minute Limit	104°C

Oil Pressure

Normal (28,000 r.p.m. & above)	80 to 100 p.s.i.g.
Min. (below 28,000 r.p.m.)	40 p.s.i.g.

Propeller

Hartzell

Hub	HC-B3TN-3D (Y)*
Blades	T10282H (B)**+0
Diameter	8 ft. 6 in. nominal (8 ft. 4 in. after repairs)

*(Y) designates Zero Thrust Latches

** (B) designates De-icing Boots.

Pitch Settings at 30" Station

Feather	+87°
Take-off Low Pitch	+17°
Idle Blade Angle	+11°
Reverse Blade Angle	-15°

Propeller limits


Propeller (Np) - Take-off	2110 r.p.m. (96%)
Max. Continuous	2110 r.p.m. (96%)

Airspeed limits
(CAS)

	<u>Landplane</u>		<u>Floatplane</u>	
	<u>Knots</u>	<u>M.P.H.</u>	<u>Knots</u>	<u>M.P.H.</u>
V _{mo} (Max. Operating) S/L	160	184.3	160	184.3
5000 ft.	155	179	155	179
10000 ft.	150	173	150	173
15000 ft.	145	167	145	167
20000 ft.	130	149.8	130	149.8
25000 ft.	115	132.5	115	132.5
V _p (Design maneuvering)	136*	156.7*	136*	156.7*
V _{mc} (Minimum control)	66	76	67	76
V _{fe} (Flaps extended)				
0° to 10°	102	117.5	102	117.5
10° to 37-1/2°	95	109.5	95	109.5

*Reduce V_p to V_{mo} above 18000 ft.

C.G. range (Landing gear fixed)

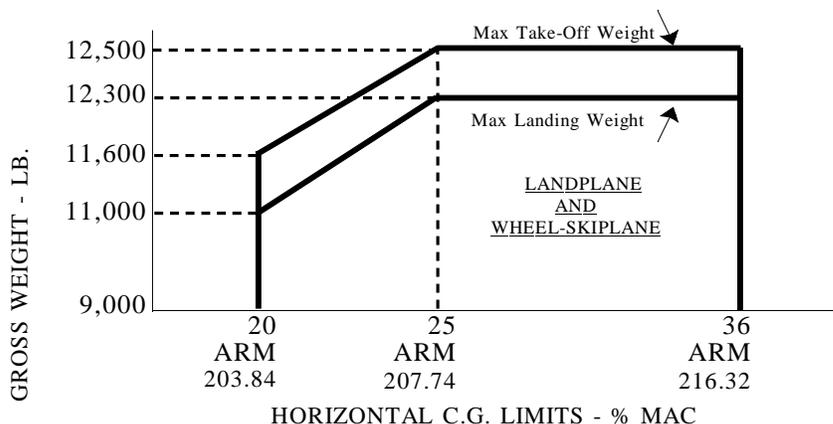

Limit	<p><u>Floatplane</u> Forward Limit 25% M.A.C. (STA. 207.74) at all weights up to max. of 12500 lb.</p> <p>32% M.A.C. (STA. 213.20) at all weights up to max. of 12500 lb.</p>	Aft																
Empty weight C.G. range	None																	
Maximum weights	<table border="0"> <tr> <td></td> <td><u>Landplane (lb.)</u></td> <td><u>Floatplane (lb.)</u></td> <td><u>Skiplane (lb.)</u></td> </tr> <tr> <td></td> <td>(With Item 201(a) or (b))</td> <td>(With Item 202(a))</td> <td></td> </tr> <tr> <td>Take-off</td> <td>12500</td> <td>12500</td> <td>12500</td> </tr> <tr> <td>Landing</td> <td>12300*</td> <td>12500</td> <td>12300*</td> </tr> </table> <p>* Main Wheel Tire Pressure (Below -20°F) 38 p.s.i.g. / 34 p.s.i.g.</p>		<u>Landplane (lb.)</u>	<u>Floatplane (lb.)</u>	<u>Skiplane (lb.)</u>		(With Item 201(a) or (b))	(With Item 202(a))		Take-off	12500	12500	12500	Landing	12300*	12500	12300*	
	<u>Landplane (lb.)</u>	<u>Floatplane (lb.)</u>	<u>Skiplane (lb.)</u>															
	(With Item 201(a) or (b))	(With Item 202(a))																
Take-off	12500	12500	12500															
Landing	12300*	12500	12300*															
Minimum Crew	One pilot. (+95.0 in.)																	
No. of seats	22 (including two at Stn. +95.0 in.) - Limited by approved seating arrangement. (See Weight and Balance Handbook).																	
Cargo loading limitations	See Weight and Balance Handbook (PSM 1-63-8)																	
Maximum baggage	<table border="0"> <tr> <td>Forward - Short Nose</td> <td>(+ 41.0 in.) 200 lb. Max.</td> </tr> <tr> <td>Forward - Long Nose (Mod. 6/1077)</td> <td>(+25.0 in.) 300 lb. Max.</td> </tr> <tr> <td>Rear</td> <td>(+354.0 in.) 500 lb. Max.*</td> </tr> <tr> <td>Rear Extension</td> <td>(+391.0 in.) 150 lb. Max.*</td> </tr> </table> <p>* Total Rear + Rear Extension not to exceed 500 lb. maximum. See Item 208(a) for approved baggage pod installation.</p>	Forward - Short Nose	(+ 41.0 in.) 200 lb. Max.	Forward - Long Nose (Mod. 6/1077)	(+25.0 in.) 300 lb. Max.	Rear	(+354.0 in.) 500 lb. Max.*	Rear Extension	(+391.0 in.) 150 lb. Max.*									
Forward - Short Nose	(+ 41.0 in.) 200 lb. Max.																	
Forward - Long Nose (Mod. 6/1077)	(+25.0 in.) 300 lb. Max.																	
Rear	(+354.0 in.) 500 lb. Max.*																	
Rear Extension	(+391.0 in.) 150 lb. Max.*																	
Fuel capacity	<table border="0"> <tr> <td><u>*USABLE FUEL</u></td> <td><u>U.S. GAL.</u></td> <td><u>IMPERIAL GAL.</u></td> </tr> <tr> <td>Forward Tank (+162.5 in.)</td> <td>181</td> <td>151</td> </tr> <tr> <td>Rear Tank (+240.0 in.)</td> <td><u>197</u></td> <td><u>164</u></td> </tr> <tr> <td>TOTAL</td> <td>378</td> <td>315</td> </tr> </table> <p>*See NOTE 1(b) for Weight and Balance.</p>	<u>*USABLE FUEL</u>	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>	Forward Tank (+162.5 in.)	181	151	Rear Tank (+240.0 in.)	<u>197</u>	<u>164</u>	TOTAL	378	315					
<u>*USABLE FUEL</u>	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>																
Forward Tank (+162.5 in.)	181	151																
Rear Tank (+240.0 in.)	<u>197</u>	<u>164</u>																
TOTAL	378	315																
Oil capacity	<table border="0"> <tr> <td><u>*USABLE OIL</u></td> <td><u>U.S. GAL.</u></td> <td><u>IMPERIAL GAL.</u></td> <td><u>WEIGHT LB.</u></td> </tr> <tr> <td>Port (+177.0 in.)</td> <td>1.5</td> <td>1.2</td> <td>11</td> </tr> <tr> <td>Starboard (+177.0 in.)</td> <td><u>1.5</u></td> <td><u>1.2</u></td> <td><u>11</u></td> </tr> <tr> <td>TOTAL</td> <td>3.0</td> <td>2.4</td> <td>22</td> </tr> </table> <p>* See NOTE 1(c) for Weight and Balance.</p>	<u>*USABLE OIL</u>	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>	<u>WEIGHT LB.</u>	Port (+177.0 in.)	1.5	1.2	11	Starboard (+177.0 in.)	<u>1.5</u>	<u>1.2</u>	<u>11</u>	TOTAL	3.0	2.4	22	
<u>*USABLE OIL</u>	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>	<u>WEIGHT LB.</u>															
Port (+177.0 in.)	1.5	1.2	11															
Starboard (+177.0 in.)	<u>1.5</u>	<u>1.2</u>	<u>11</u>															
TOTAL	3.0	2.4	22															

Maximum Operating Altitude	25000 ft. (when supplementary breathing equipment is provided for all occupants).		
Control surface movements	Aileron (with flaps up)	Up 17.5°	Down 16°
	(with flaps in landing position)	Up 25°	Down 17.5°
	Trim Tab	+ or -15°	
	Gear Tab (flap up)	Up 16°	Down 17.5°
	Flaps (inboard forward)	0° to 40°	
	(inboard trailing)	0° to 62.5°	
	(outboard forward)	0° to 26°	
	(outboard trailing)	(aileron)	
	Elevator	Up 25°	Down 16°
	Tab	Up 20°	Down 25°
	Flap interconnect (flap up)		Down 12°
	(flap landing)	Up 12°	
Rudder	Left 17°	Right 21°	
Gear Tab	Left -5.5°	Right +10°	
Trim Tab	+ or -25°		
	See Maintenance Manual Part No. PSM-1-6-2 for procedure to rig control surface movements from stop to stop.		
Serial Nos. eligible	130, 210, 231 thru 844.		
Import eligibility	The Canadian Department of Transport Certificate of Airworthiness for export endorsed as noted under "Import Eligibility" must be submitted for each individual aircraft for which application for certification is made.		
Import eligibility	A U.S. Airworthiness Certificate may be issued on the basis of the Canadian Department of Transport "Certificate of Airworthiness for Export" signed by or for the Minister of Transport. This form must contain the following statement: "This certifies that the aircraft described below has been manufactured in conformity with data forming the basis for D.O.T. Type Approval No. A-82, Issue 5, dated September 10, 1969. (FAA Type Certificate No. A9EA)."		
Certification basis	CAR 3 dated May 15, 1956 and Amendments 3-1 to 3-8 inclusive, plus Special Conditions for Multi-Engine Turbine Powered Aircraft dated November 6, 1964.		
	Type Certificate No. A9EA issued June 22, 1966. Date of Application for Type Certificate April 2, 1964.		
	For this Model airplane intended for use in operations under FAR Part 135, the additional airworthiness requirements of Special Federal Aviation Regulation (SFAR) 23, dated January 7, 1969, and Amendment 1 to SFAR 23, dated December 24, 1969, are also included. See NOTES 3 and 8.		
	For this Model airplane intended for operations in accordance with the performance limitations of 14 CFR § 121.189 through 121.197, and Airplane Flight Manual Supplement #37 – Supplemental Performance Data, document PSM 1-63-1A, the following commuter category performance requirements of 14 CFR Part 23 are included: 14 CFR §§ 23.45, 23.51, 23.53, 23.55, 23.57, 23.59, 23.61, 23.65, 23.67, 23.75, 23.77, 23.1581, 23.1583, 23.1585, 23.1587 and 23.1589 up to and including Amendment 23-57. See NOTES 3 and 9.		
Equipment	The basic required equipment as prescribed in the applicable airworthiness regulations (see Certification Basis) must be installed in the aircraft for certification and is given in Viking Air Limited (or Bombardier) Report A.E.R.O.C. 6.6.G.1. In addition, the following item of equipment is required:		
	(a) Canadian D.O.T. approved Airplane Flight Manual, PSM-1-63-1A.		

V - Model DHC-6-400 (Normal Category), Approved June 11, 2012 by the FAA and June 24, 2010 by Transport Canada Civil Aviation (TCCA).

This is the fourth production series of the Type DHC-6. This series is identified primarily on the basis of:

- (1) PT6A-34 engine in place of -27 engine;
- (2) Fully integrated Electronic Flight Instrument System (EFIS) in place of legacy instruments;


	(3) Upgraded electrical system; and,																								
	(4) Cabin safety compliance with later design standards, see "Certification basis".																								
Engines	2 Pratt & Whitney Canada Inc. PT6A-34																								
Fuel	For list of approved jet fuels refer to Pratt & Whitney Canada Inc. Service Bulletin No. 1244, latest issue. (MIL-G-5572C Avgas (all grades) for emergency use only - limited to 150 hours use in any one overhaul cycle.)																								
Oil	For list of approved lubricating oils refer to Pratt & Whitney Canada Inc. Service Bulletin No. 1001, latest issue.																								
Engine rating	<table border="0"> <tr> <td><u>RATING</u></td> <td><u>E.S.H.P.</u></td> <td><u>S.H.P.</u></td> </tr> <tr> <td>Take-off</td> <td>652*</td> <td>620*</td> </tr> <tr> <td>Max. continuous</td> <td>652*</td> <td>620*</td> </tr> </table> <p><i>*Available to 108°F (42°C) Ambient Temperature (S.L.)</i></p>	<u>RATING</u>	<u>E.S.H.P.</u>	<u>S.H.P.</u>	Take-off	652*	620*	Max. continuous	652*	620*															
<u>RATING</u>	<u>E.S.H.P.</u>	<u>S.H.P.</u>																							
Take-off	652*	620*																							
Max. continuous	652*	620*																							
Engine limits	<p>Temperature Limits (Inter-Turbine)</p> <table border="0"> <tr> <td>Take-off</td> <td>1454°F (790° C)</td> </tr> <tr> <td>Max. Continuous</td> <td>1454°F (790° C)</td> </tr> <tr> <td>Starting (2 sec.)</td> <td>1994°F (1090° C)</td> </tr> </table> <p>Torque Limits</p> <table border="0"> <tr> <td>Take-off</td> <td>50 p.s.i. (1536 ft.-lb.)</td> </tr> <tr> <td>Max. Continuous</td> <td>50 p.s.i. (1536 ft.-lb.)</td> </tr> </table> <p>Gas Generator</p> <table border="0"> <tr> <td>Take-off</td> <td>38,100 r.p.m. (101.5%)</td> </tr> <tr> <td>Max. Continuous</td> <td>38,100 r.p.m. (101.5%)</td> </tr> </table> <p>Oil Temperature</p> <table border="0"> <tr> <td>Starting</td> <td>-40°F (-40°C) Minimum</td> </tr> <tr> <td>Take-off</td> <td>50°F to 210.2°F (10°C to 99°C)</td> </tr> <tr> <td>Max. Continuous</td> <td>50°F to 210.2°F (10°C to 99°C)</td> </tr> </table> <p>Oil Pressure</p> <table border="0"> <tr> <td>Normal (27,000 r.p.m. & above)</td> <td>85 to 105 p.s.i.g.</td> </tr> <tr> <td>Min. (below 27,000 r.p.m.)</td> <td>40 p.s.i.g.</td> </tr> </table>	Take-off	1454°F (790° C)	Max. Continuous	1454°F (790° C)	Starting (2 sec.)	1994°F (1090° C)	Take-off	50 p.s.i. (1536 ft.-lb.)	Max. Continuous	50 p.s.i. (1536 ft.-lb.)	Take-off	38,100 r.p.m. (101.5%)	Max. Continuous	38,100 r.p.m. (101.5%)	Starting	-40°F (-40°C) Minimum	Take-off	50°F to 210.2°F (10°C to 99°C)	Max. Continuous	50°F to 210.2°F (10°C to 99°C)	Normal (27,000 r.p.m. & above)	85 to 105 p.s.i.g.	Min. (below 27,000 r.p.m.)	40 p.s.i.g.
Take-off	1454°F (790° C)																								
Max. Continuous	1454°F (790° C)																								
Starting (2 sec.)	1994°F (1090° C)																								
Take-off	50 p.s.i. (1536 ft.-lb.)																								
Max. Continuous	50 p.s.i. (1536 ft.-lb.)																								
Take-off	38,100 r.p.m. (101.5%)																								
Max. Continuous	38,100 r.p.m. (101.5%)																								
Starting	-40°F (-40°C) Minimum																								
Take-off	50°F to 210.2°F (10°C to 99°C)																								
Max. Continuous	50°F to 210.2°F (10°C to 99°C)																								
Normal (27,000 r.p.m. & above)	85 to 105 p.s.i.g.																								
Min. (below 27,000 r.p.m.)	40 p.s.i.g.																								
Propeller	<p>Hartzell</p> <table border="0"> <tr> <td>Hub</td> <td>HC-B3TN-3D (Y)*</td> </tr> <tr> <td>Blades</td> <td>T10282H (B)**+0, T10282 (B)**+0</td> </tr> <tr> <td>Diameter</td> <td>8 ft. 6 in. nominal (8 ft. 4 in. after repairs)</td> </tr> </table> <p><i>*(Y) designates Zero Thrust Latches</i> <i>** (B) designates De-icing Boots.</i></p> <p>Pitch Settings at 30" Station</p> <table border="0"> <tr> <td>Feather</td> <td>+87°</td> </tr> <tr> <td>Take-off Low Pitch</td> <td>+17°</td> </tr> <tr> <td>Idle Blade Angle</td> <td>+11°</td> </tr> <tr> <td>Reverse Blade Angle</td> <td>-15°</td> </tr> </table>	Hub	HC-B3TN-3D (Y)*	Blades	T10282H (B)**+0, T10282 (B)**+0	Diameter	8 ft. 6 in. nominal (8 ft. 4 in. after repairs)	Feather	+87°	Take-off Low Pitch	+17°	Idle Blade Angle	+11°	Reverse Blade Angle	-15°										
Hub	HC-B3TN-3D (Y)*																								
Blades	T10282H (B)**+0, T10282 (B)**+0																								
Diameter	8 ft. 6 in. nominal (8 ft. 4 in. after repairs)																								
Feather	+87°																								
Take-off Low Pitch	+17°																								
Idle Blade Angle	+11°																								
Reverse Blade Angle	-15°																								
Propeller limits	<table border="0"> <tr> <td>Propeller (Np) - Take-off</td> <td>2110 r.p.m. (96%)</td> </tr> <tr> <td>Max. Continuous</td> <td>2110 r.p.m. (96%)</td> </tr> </table>	Propeller (Np) - Take-off	2110 r.p.m. (96%)	Max. Continuous	2110 r.p.m. (96%)																				
Propeller (Np) - Take-off	2110 r.p.m. (96%)																								
Max. Continuous	2110 r.p.m. (96%)																								

Airspeed limits
(CAS)

	<u>Landplane</u>	
	<u>Knots</u>	<u>M.P.H.</u>
V _{mo} (Max. Operating) S/L	170	196
6700 ft.	170	196
10000 ft.	160	184.3
15000 ft.	145	167
20000 ft.	130	149.8
25000 ft.	115	132.5
V _p (Design maneuvering)	136*	156.7*
V _{mc} (Minimum control)	66	76
V _{fe} (Flaps extended)		
0° to 10°	105	121.1
10° to 37°	95	109.5

**Reduce V_p to V_{mo} above 18000 ft.*

C.G. range (Landing gear fixed)

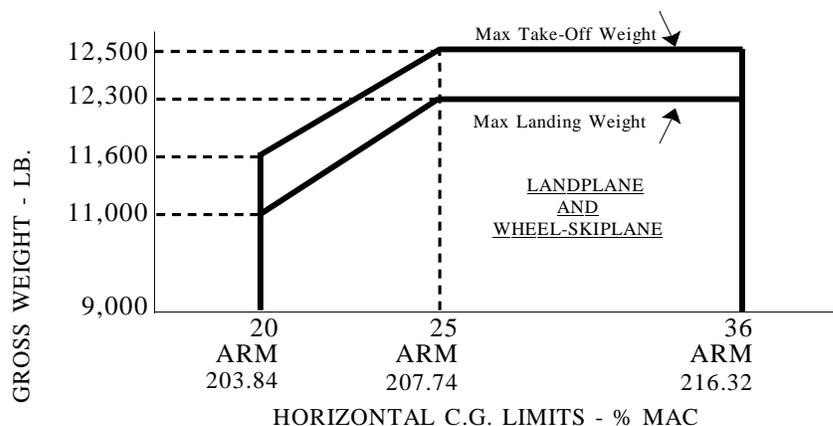

Empty weight C.G. range

None

Maximum weights

	<u>Landplane (lb.)</u> (With Item 201(a) or (b))	<u>Skiplane (lb.)</u>
Take-off	12500	12500
Landing	12300*	12300*

* Main Wheel Tire Pressure 38 p.s.i.g.
(Below -20°F) 34 p.s.i.g.

Minimum Crew

One pilot. (+95.0 in.)

No. of seats

21 (including two at Stn. +95.0 in.) - Limited by approved seating arrangement. (See Weight and Balance Handbook).

Cargo loading limitations

See Weight and Balance Handbook (PSM 1-64-8)

Maximum baggage

Forward - Long Nose (Mod. 6/1077)	(+25.0 in.)	300 lb. Max.
Rear	(+354.0 in.)	500 lb. Max.*
Rear Extension	(+391.0 in.)	150 lb. Max.*

* Total Rear + Rear Extension not to exceed 500 lb. maximum.

Fuel capacity

<u>*USABLE FUEL</u>	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>
Forward Tank (+162.5 in.)	181	151
Rear Tank (+240.0 in.)	197	164
TOTAL	378	315

*See NOTE 1(b) for Weight and Balance.

Oil capacity	<u>*USABLE OIL</u>	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>	<u>WEIGHT LB.</u>
	Port (+177.0 in.)	1.5	1.2	11
	Starboard (+177.0 in.)	<u>1.5</u>	<u>1.2</u>	<u>11</u>
	TOTAL	3.0	2.4	22

* See NOTE 1(c) for Weight and Balance.

Maximum Operating Altitude 25000 ft. (when supplementary breathing equipment is provided for all occupants).

Control surface movements	Aileron (with flaps up)	Up 17.5°	Down 16°
	(with flaps in landing position)	Up 25°	Down 17.5°
	Trim Tab	+ or -15°	
	Geared Tab (flap up)	Up 16°	Down 17.5°
	Flaps (inboard forward)	0° to 40°	
	(inboard trailing)	0° to 62.5°	
	(outboard forward)	0° to 26°	
	(outboard trailing)	(aileron)	
	Elevator Tab	Up 25°	Down 16°
	Flap interconnect (flap up)	Up 20°	Down 25°
(flap landing)	Up 12°	Down 12°	
Rudder	Left 17°	Right 21°	
Geared Tab	Left -5.5°	Right +10°	
Trim Tab	+ or -25°		

See Maintenance Manual Part No. PSM-1-64-2 for procedure to rig control surface movements from stop to stop.

Serial Nos. eligible 845 and subsequent.

The Canadian Department of Transport Certificate of Airworthiness for export endorsed as noted under "Import Eligibility" must be submitted for each individual aircraft for which application for certification is made.

Import eligibility A U.S. Airworthiness Certificate may be issued on the basis of the Canadian Department of Transport "Certificate of Airworthiness for Export" signed by or for the Minister of Transport. This form must contain the following statement: "The aircraft covered by this certificate has been examined and found to comply with the type design approved under U.S. Type Certificate No. A9EA and to be in a condition for safe operation."

Certification basis

A - Basic Aircraft Model:

- CAR 3 dated May 15, 1956 and Amendments 3-1 to 3-8 inclusive, plus Special Conditions for Multi-Engine Turbine Powered Aircraft dated November 6, 1964.
- For this Model airplane intended for use in operations under FAR Part 135, the additional airworthiness requirements of Special Federal Aviation Regulation (SFAR) 23, dated January 7, 1969, and Amendment 1 to SFAR 23, dated December 24, 1969, are also included. See NOTES 3 and 8.
- 14 CFR §§23.783 (a), (b), (c)(1), (c)(3) and (c)(4), 23.785 (a), (b), (c), (f), (g)(2), (h), (i), (j), (k) and (l), 23.787(a), (b), (c), (d), and (f) and (g), 23.803, 23.807 (a), (b), (c) and (d), 23.815 and 23.851 (a) and (b) as amended by Amdt. 23-34;
- 14 CFR §§23.853 (a), (c), (d)(3)(i) and (ii) and 23.1359(c) as amended by Amdt. 23-49.

B - For those areas of the Basic Aircraft Model affected by the installation of the EFIS Avionics Suite. The Certification Basis will add the following 14 CFR Part 23 (Normal Category) requirements at Amdt. 23-57, which is the latest amendment in effect on the date of application for the DHC-6-400, to those listed above:

- Subpart D: §§23.771 – Amdt. 23-14; 23.773 – Amdt. 23-45; 23.777 and 23.779 – Amdt. 23-51; 23.781 – Amdt. 23-33; 23.867 – Amdt. 23-49;
- Subpart E: §§23.901 – Amdt. 23-53 ; 23.963 – Amdt. 23-51;
- Subpart F: §§23.1367 and 23.1381 – Amdt. 23-0; 23.1301, 23.1327 and 23.1335 – Amdt. 23-20; 23.1457 and 23.1459 – Amdt. 23-35; 23.1322, 23.1331 and 23.1357 – Amdt. 23-43; 23.1303, 23.1307, 23.1309, 23.1311, 23.1321, 23.1323, 23.1326, 23.1329, 23.1351, 23.1353, 23.1359, 23.1361, 23.1365 and 23.1431 – Amdt. 23-49; 23.1325 – Amdt. 23-50; 23.1337 – Amdt. 23-51; 23.1305 – Amdt. 23-52; 23.1308 – Amdt. 23-57;

- Subpart G: §§23.1551 – Amdt. 23-0; 23.1547 – Amdt. 23-20; 23.1501 and 23.1541 – Amdt. 23-21; 23.1529 – Amdt. 23-26; 23.1549 and 23.1557 – Amdt. 23-45; 23.1543, 23.1545, 23.1553, 23.1555, 23.1559, 23.1581, 23.1583, 23.1585, 23.1587, and 23.1589 – Amdt. 23-50.

C - Equivalent Level of Safety (ELOS) findings:

- 1) Circuit Protection - 14 CFR § 23.1357(b)
- 2) LED Lights -14 CFR § 23.1397(c)
- 3) Airspeed Indicator Flap Markings - 14 CFR§ 23.1545(b)(4)
- 4) Engine Instrument Display - 14 CFR § 23.1549(b) & (c)

D - Exemptions:

Exemption No. 10465 with time-limited conditions granted on March 1, 2012 for engine display colors depicting normal operating conditions, 14 CFR § 23.1549(b). This exemption terminates on July 31, 2013, unless sooner superseded or rescinded.

E - Noise Standards:

Compliance is required for 14 CFR Part 36 at the amendment levels in effect at the date of application for the amended TC.

F - Fuel Venting and Exhaust Emissions Standards:

Compliance is required for 14 CFR Part 34-1 thru the most current amendments in effect on the date that the amended TC is granted.

G - Additional Requirements:

For this Model airplane intended for operations in accordance with the performance limitations of 14 CFR § 121.189 through 121.197, and Airplane Flight Manual Supplement #37 – Supplemental Performance Data, document PSM 1-64-1A, the following commuter category performance requirements of 14 CFR Part 23 are included:
14 CFR §§ 23.45, 23.51, 23.53, 23.55, 23.57, 23.59, 23.61, 23.65, 23.67, 23.75, 23.77, 23.1581, 23.1583, 23.1585, 23.1587 and 23.1589 up to and including Amendment 23-57. See NOTES 3, 10 and 11.

Type Certificate No. A9EA amended June 11, 2012.

Date of Application for amendment to Type Certificate August 12, 2008.

Equipment The basic required equipment as prescribed in the applicable airworthiness regulations (see Certification Basis) must be installed in the aircraft for certification and is given in Viking Air Limited Report A.E.R.O.C. 6.6.G.1. In addition, the following item of equipment is required:

- (a) Transport Canada approved Airplane Flight Manual, PSM-1-64-1A.

Data Pertinent to All Models

Datum	Station 0 is 109.32 inches forward of a jig point which is marked by a plate attached to the bulkhead between the cockpit and the cabin.
M.A.C.	78 inches. (The L.E. is at Station 188.24).
Leveling means	The cabin floor rails provide a surface for levelling the airplane both laterally and longitudinally. The cabin floor level is 15 inches below water line zero.
Equipment	The list of approved equipment, including the basic required equipment as prescribed in the applicable airworthiness regulations (see Certification Basis) which must be installed in the aircraft for certification, is given in Viking Air Limited (or Bombardier) Report A.E.R.O.C. 6.6.G.1.
Approved Installations	<u>Item 201 - Ski Installations</u> (a) Wheel/Ski Model 3000 nose-wheel/ski and Model 5500 main-wheel/ski installed to VAL (or BI) Drawing C6-US-1000, G.A. Ski Installation. Applicable to Model DHC-6-1, -100, -200, -300, and -400 Aircraft. Aircraft to be operated

in accordance with appropriate DOT Approved VAL (or BI) Flight Manual Supplement.

- (b) Spring Skis
Skis installed to VAL (or BI) Installation Drawing C6-US-1001. Applicable to Model DHC-6-1 and -100 Aircraft.

Item 202 - Float Installations

- (a) CAP Model 12000 Floats on Models 1, 100 and 200 Aircraft, up to 11600 lb., or CAP Model 12000A and 12000B Floats on Model 300 Aircraft up to 12500 lb. installed to VAL (or BI) Drawing C6-UF-1000 G.A. Floatplane. Ref. DOT Float Type Approval F-10.
- (b) CAP Models 12000, 12000A or 12000B Floats modified in accordance with Field Aviation Company Limited Drawing No. 84193 to provide capability of loading and dropping water. Water Bomber aircraft are to be operated in accordance with DOT Approved Flight Manual Amendment contained in Field Aviation Company Report No. 6035. Water Bomber equipment is to be maintained in accordance with Field Aviation Company Report No. 4889. The operation of water bomber aircraft is within the following limitations:
 - (i) Model 100 and 200 Aircraft:
CAP 12000 Floats
Aircraft Gross Weight 11600 lb. at C.G. Limits of 25% to 32% MAC with DH Mod. 6/1020 embodied.
Maximum Water Capacity in Two Floats 425 Imperial Gal. Total.
Maximum Fuselage Cargo 500 lb.
Rudder travel Limits are: Left 17°, Right 21°.
 - (ii) Model 300 Aircraft:
CAP 12000A or 12000B Floats
Aircraft Gross Weight 12500 lb. at C.G. Limits of 25% to 32% MAC.
Maximum Water Capacity in Two Floats 450 Imperial Gal. Total.
Maximum Fuselage Cargo 500 lb.
Rudder travel Limits are: Left 17°, Right 21°.

Item 203 - Intermediate Flotation Gear

- (a) VAL (or BI) Intermediate Flotation Gear Installed to VAL (or BI) Drawing C6-U-1000. Applicable to Models DHC-6-1, -100, -200, -300 and -400 Aircraft. Aircraft to be operated in accordance with appropriate DOT Approved VAL (or BI) Flight Manual Supplement.

Item 204 - Aircraft Ice Protection

- (a) Models DHC-6-1, -100, -200, and -300 aircraft approved for operation in icing when equipped with following VAL (or BI) Modifications:

6/1043, 6/1066, 6/1089, S.O.O. 6004, S.O.O. 6005, S.O.O. 6006, S.O.O. 6009 and either S.O.O. 6007 or 6008.

Aircraft to be operated in accordance with appropriate DOT Approved VAL (or BI) Flight Manual Supplement.
- (b) Model DHC-6-400 aircraft approved for operation in icing when equipped with following VAL Modifications:

6/2042, 6/2045, S.O.O. 6168 and either S.O.O. 6202 or 6237.

Aircraft to be operated in accordance with appropriate TCCA Approved VAL Flight Manual Supplement.

Item 205 - Auto-pilot Installation

- (a) Bendix M-4C Automatic Flight Control System installed to Field Aviation Co. Ltd. Drawing J-500 061 per STA. SA67-7 for Model DHC-6-100. Aircraft to be operated in accordance with the April 22, 1968 issue of the M-4C Supplement to the DHC-6 Flight Manual.

Item 206 - Interior Installation

- (a) Commuter interior installation installed to Field Aviation Co., Ltd. Report 4961 dated September 25, 1968.

Item 207 - Avionics Installation

- (a) Avionics equipment installed to Field Aviation Co., Ltd. Report 4962 dated September 26, 1968.
- (b) Avionics equipment installed in accordance with Technical Enterprise Limited Report TELAIR DHC-6.

Item 208 - Baggage Pod Installation

- (a) For Model DHC-6-300, baggage pod installation when installed and operated in accordance with Field Aviation Co., Ltd. Report No. 6093 dated 29 March 1971.

NOTES

- NOTE 1. (a) The current Weight and Balance Handbook, Part Number PSM-1-6-8, for all Models except the 300 and PSM-1-63-8 for the Model DHC-6-300, giving the list of equipment included in the empty weight and loading instructions, must be in each aircraft except in the case of operators having an approved weight control system.

- (b) The following amount of unusable fuel is included in the empty weight:

Unusable	<u>MODEL 1</u>		<u>ALL OTHER MODELS</u>	
	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>	<u>U.S. GAL.</u>	<u>IMPERIAL GAL.</u>
	7.25	6.0	3.5	3.0

- (c) For weight and balance purposes the total oil including system and tank is included in the empty weight and equals 54 lb. at +177 in.

- NOTE 2. The following placards must be displayed in clear view of the pilot at all times:

- (a) "THIS AIRPLANE MUST BE OPERATED AS A NORMAL CATEGORY AIRPLANE IN COMPLIANCE WITH THE OPERATING LIMITATIONS STATED IN THE FORM OF PLACARDS, MARKINGS AND MANUALS."
- (b) "NO ACROBATIC MANEUVERS (INCLUDING SPINS) ARE APPROVED."
- (c) "DAY, NIGHT, VFR."
- (d) "IFR" when the aircraft is equipped in accordance with the requirements for the operation intended, and either -
- (1) Vacuum system warning light installed to VAL Mod. 6/1014 to alert pilots of low vacuum pressure to flight instruments, or
 - (2) Pressure Instrument System, VAL Mod. 6/1046, is installed, or
 - (3) Electrical Directional Gyro and Altitude Indicators in list of approved equipment as defined in Viking Air Limited Report A.E.R.O.C. 6.6.G.1. are installed.
- (e) "THIS AIRPLANE IS EQUIPPED FOR OPERATION IN ICING CONDITIONS" when the aircraft is equipped with Item 204.

- NOTE 3. For Models DHC-6-1, -100, -200, -300, and -400 airplanes, the Structural Components Service Life Limits recorded in the Viking Air Limited (or Bombardier) Manual PSM 1-6-11 and approved by Transport Canada Civil Aviation, must be complied with.

For Model DHC-6-400 airplanes, the Avionics Airworthiness Limitations recorded in Viking Air Limited Manual PSM 1-6-13 and approved by Transport Canada Civil Aviation, must be complied with.

- NOTE 4. Engine fire extinguisher installation accepted. System not approved until completion of successful extinguisher tests.

- NOTE 5. The landing weight is 11400 lb. if the airport temperature at which the landing is to be made is at or above -20°F (-29°C). If the airport temperature is below -20°F, then the landing weight is restricted to 11000 lb.

- NOTE 6. The Model DHC-6-200 or -300 aircraft may have either the long nose (VAL (or BI) Mod. 6/1077) or the original short nose (as per the Model DHC-6-100 aircraft) in any configuration with the exception of the floatplane version which must have a short nose.

- NOTE 7. Maximum continuous single generator load is limited to:

- (a) 200 amps (1.0 on loadmeter) in Flight conditions up to 125°F.
- (b) 200 amps (1.0 on loadmeter) in Ground conditions up to 45°F.
- (c) 160 amps (0.8 on loadmeter) in Ground conditions from 45°F to 125°F.

- NOTE 8. For Models DHC-6-100, -200 and -300 airplanes intended for use in operations under FAR Part 135, one of the following must be accomplished:

- (a) Modifications recorded in Viking Air Limited (or Bombardier) Report AEROC 6.1.G.11-DHC-6 Certified Airplanes - Basic Definitions. The appropriate DOT approved VAL (or BI) Flight Manual Supplement is to be inserted in the Airplane Flight Manual.

- (b) Equivalent modifications to (a) above in compliance with SFAR 23 as approved by the Regional Chief of an Engineering and Manufacturing Branch (Aircraft Engineering Division in Western Region) FAA.
- (c) Modifications in compliance with Appendix A to FAR 135.

For Model DHC-6 Series 400 airplanes:

All aircraft delivered are compliant with SFAR 23 and Amendment 23-1 as delivered.

NOTE 9. For Model DHC-6-300 airplanes intended for operations in accordance with the performance limitations of 14 CFR § 121.189 through 121.197, the Airplane Flight Manual Supplement #37 – Supplemental Performance Data, is to be inserted in the Airplane Flight Manual, document PSM 1-63-1A.

NOTE 10. For Model DHC-6-400 airplanes intended for operations in accordance with the performance limitations of 14 CFR § 121.189 through 121.197, the Airplane Flight Manual Supplement #37 – Supplemental Performance Data, is to be inserted in the Airplane Flight Manual, document PSM 1-64-1A.

NOTE 11. For Model DHC-6-400 airplanes:

- (a) The electrical system upgrade consists of removing the AC system; replacing the starter-generator and the DC system wiring, connectors, lights (strobe, navigation, nose wheel position indicator, and interior) and door proximity switches, and installing an increased capacity battery, 12V DC outlets in the cockpit and an optional pulsing landing light system.
- (b) The cockpit upgrade consists of replacing the conventional primary flight instruments, engine instruments and crew alerting system with an integrated Honeywell Primus Apex® EFIS avionics suite; the installation of / provisions for comm/nav equipment, radar altimeter, CVR, FDR, weather radar and cabin public address system; and related changes to the electrical system, circuit breakers and switches.

....END....