

Propeller and
propeller limits

Hubs - 2 Hamilton Standard 24260
Blades - 3 2J17H3-36S
Diameter Limits: 14 ft. 2 in. - no cutoff permitted
Continuous ground operation between 2000 and 2400 r.p.m. is prohibited.

Pitch Setting at 72 in. Station

Low Pitch + 16°
Feathered + 82°
Reverse - 22°

Airspeed limits
(C.A.S.)


Vmo (Maximum Operating) 242 m.p.h. (210 knots)
Vfe (Flaps Extended 5°) 242 m.p.h. (210 knots)
Vfe (Flaps Extended 10°) 242 m.p.h. (210 knots)
Vfe (Flaps Extended 15°) 230 m.p.h. (200 knots)
Vfe (Flaps Extended 20°) 201 m.p.h. (175 knots)
Vfe (Flaps Extended 25°) 178 m.p.h. (155 knots)
Vfe (Flaps Extended 32°) 167 m.p.h. (145 knots)
Vle (Maximum Speed Landing Gear Extended) 178 m.p.h. (155 knots)
Va (Maneuvering Speed) 184 m.p.h. (160 knots)
Vmc (Minimum Control Speed) 124 m.p.h. (108 knots)

Fire Retardant Dumping Envelope (See Note 2)

120 knots to 145 knots (Full Flaps)
120 knots to 150 knots (All Other Flap Settings)

Center of Gravity
(C.G. range)

(26.0) to (38.0) at 80,000 lb.
(19.4) to (38.0) at 61,800 lb.
Straight-line variation between points given

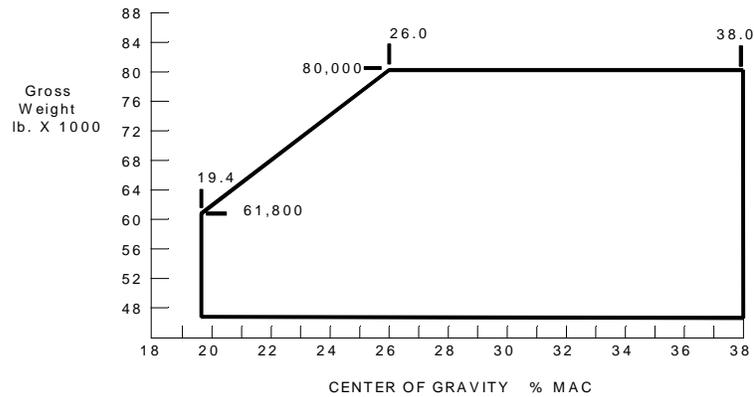

Empty weight C.G. range

None

Datum

The reference datum is located at fuselage station 0

Mean aerodynamic chord
(M.A.C.)

The leading edge of the M.A.C. is located at fuselage station 330.1
The length of the M.A.C. is 126.2 inch.

Leveling means

Longitudinal: Use the leveling hook in the nose gear wheel well
Lateral: Level airplane laterally by adjusting wing jacks

Maximum weights Takeoff 80,000 lb.
 Landing 67,000 lb.

Minimum crew Two (Pilot and Co-Pilot)

Number of seats None

Maximum baggage None

Fuel capacity ***

	No. Tanks	Gal.	Total Fuel	
			Gal.	Lb.
Center section	2	790	1580	9480
Main (outboard wing panel)	2	715	1430	8580
Total Permanent Tankage			3010	18060

***Arm variable - refer to individual airplane weight and balance data.
 Wing tip fuel tanks or bomb bay fuel tanks are not approved.

Oil capacity ****

	No. Tanks	Gal.	Total Oil	
			Gal.	Lb.
<u>Bureau Number 124856 through 128422</u>				
Nacelle Tank	2	60	120	852
(Expansion space)	2	27	-	-
Auxiliary Tank	1	35	35	249
(Expansion space)	1	4	-	-
<u>Bureau Number 131400 and subsequent</u>				
Nacelle tank	2	80	160	1136
(Expansion space)	2	20	-	-
<u>Jet Pod Oil Tank</u>	2	1.38	2.75	20.6

****Arm variable - refer to individual airplane weight and balance data.

Water injection
 Tank capacity (ADI)

	No. Tanks	Gal.	Total ADI	
			Gal.	Lb.
Nacelle Tank	2	25	50	375

Fluid - 50% Federal Specification O-M-232 Grade A 50% Distilled Water

Control surface movements	Aileron	Up	20°	Down	18.5°
	Aileron Trim Tab	Up	15°45' ± 2°	Down	16°20' ± 2°
	Aileron Spring Tab			Down	20°
	Flaps			Down	32°
	Spoilers	Up	55° - 60°		
	Elevator	Up	27°37' ± 1 1/2°	Down	27° ± 1 1/2°
	Elevator Trim Panel	Up	7° (+ 1/4° -0°)	Down	3° (+ 1/4° -0°)
	Rudder	Left	21°	Right	21°
	Rudder Trim Tab	Left	10°	Right	10°30'

Serial Nos. eligible

All U.S. Navy Bureau Nos. (See Notes 4 and 5)

Certification basis	FAR 21.25(a)(2) including Amendment 21-1 through 21-37, effective 4 December 1970. Type Certificate No. A17EA issued 13 October 1971 for the special purpose of forest and wildlife conservation (fire fighting). Date of Application: 8 July 1970.
Production basis	None
Equipment	The basic required equipment as prescribed in the applicable airworthiness regulations (see Certification Basis) must be installed in the aircraft for certification. Equipment necessary for the particular special purpose operation must be installed. See Note 5.

- NOTE 1. The current weight and balance report including a list of equipment included in certificated empty weight, and loading instructions when necessary must be provided for in each aircraft at the time of original airworthiness certification.
- NOTE 2. The aircraft shall be operated in accordance with the Navy Flight Handbook NAVWEPS 01-75 EDA-1 for the SP-2E Neptune dated 1 September 1965 and in conjunction with the Flight Manual Supplement required for the special purpose.
- NOTE 3. Reserved.
- NOTE 4. Prior to civil certification, compliance with the following Department of the Navy P-2 Service Bulletins, Aircraft Bulletins, Aircraft Service Changes, Engine and Propeller Bulletins and Powerplant Changes in addition to the P-2 "Maintenance Requirement Cards NA01-75EEB-6 Series" must be established.

Airframe Bulletins

2, 3, 6, 10 Rev. A, 11, 31, 31 Am. 1; 40, 43, 45, 47, 48, 54, 55, 56, 57, 58, 67, 70, 72, 73, 75, 76 Am.1, 79, 80*, 81, 84, 94, 99, 99 Am. 1, 100, 108, 109, 110, 113, 116, 117, 118.

**Partial compliance required (Reference U.S. Navy Speed Letter to Federal Aviation Administration (EA-212) dated 15 October 1971).*

Aircraft Bulletins

150, 221

Aircraft Service Changes

378, 378A, 383, 385, 398, 399, 434, 463, 521, 540, 598, 601, 622, 658, 714, 735, 751, 756, 807, 819, 820, 826, 830B, 848, 848A, 851, 852, 852A, 854, 862, 885, 903, 910, 912, 922, 924**, 924 Am. 1**, 940, 943, 951, 955A, 984**.

***Applicable only to stainless steel nacelles.*

R-3350 Engine Bulletins

424, 753A, 754

J-34 Turbo-Jet Engine Bulletins

177, 177 Am. 1, 261, 336, 336 Am. 1, 376, 376 Am. 1, 379

J-34 Powerplant Changes

16, 17

Hamilton Standard Propeller Bulletins

422B, 444, 476A, 486, 488, 489, 491, 505A

NOTE 5. Modification to these aircraft or special equipment will be necessary, reference FAR 21.25(a)(2), prior to civil airworthiness certification for the special purpose of forest and wildlife conservation (fire-fighting) and for any other FAA approved special purpose operation.

The fire retardant tank and installation in accordance with Rosenbalm Aviation, Inc. Drawing List "P2V-5 Aerial Tanker" dated 8 December 1971 together with the Rosenbalm Aviation, Inc. Installation Instructions "Conversion of P2V-5 A/C to Aerial Tanker General Instructions" dated 8 December 1971 is an approved modification for the special purpose of forest and wildlife conservation (fire-fighting). Lockheed Model SP-2E (P2V-5F) Air Tanker Conversion U. S. Forest Service Flight Manual Supplement #1, dated 13 October 1971 is required for this special purpose. "This modification is approved only for one aircraft, manufacturer's S/N 5044, Navy Bureau No. 124904."

NOTE 6. Restricted aircraft airworthiness certificates issued are effective as long as maintenance and preventive maintenance are performed in accordance with "Maintenance Requirement Cards NA01-75EEB-6 Series", Department of the Navy Service Bulletins Nos. 116, 117, and 118; and FAR Parts 21, 43 and 91.

NOTE 7. No agricultural aircraft operations shall be conducted unless approval has been issued under provisions of FAR Part 137.

NOTE 8. The FAA representative responsible for the issuance of Restricted Airworthiness Certificates shall make Notes 6 and 7 part of the operating limitations issued with the Airworthiness Certificate.

.....END.....